


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

8675171 (S/N 1446)

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC130555	KC111377	
Sample Date		Client Info		15 Apr 2024	28 Mar 2023	
Machine Age	hrs	Client Info		3785	920	
Oil Age	hrs	Client Info		3000	920	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	28	5	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	0	10	
Molybdenum	ppm	ASTM D5185m	50	0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m	90	2	75	
Calcium	ppm	ASTM D5185m		0	2	
Phosphorus	ppm	ASTM D5185m	2	0	0	
Zinc	ppm	ASTM D5185m		0	5	
			limit/base			
		method		current	history1	history2
Silicon	ppm		>25	0	1	
Sodium	ppm	ASTM D5185m	00	4	13	
Potassium	ppm	ASTM D5185m	>20	1	6	
Water	%	ASTM D6304	>0.05	0.006	0.025	
ppm Water	ppm	ASTM D6304		62	257.9	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21998	8788	
Particles >6µm		ASTM D7647	>1300	🔺 11649	<u> </u>	
Particles >14µm		ASTM D7647	>80	<u> </u>	A 378	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	4	<u> </u>	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/21/18	▲ 20/19/16	
		method	limit/base	ourroot	biotopyt	biotom/0
FLUID DEGRADA		method	iiiiii/base	current	history1	history2



OIL ANALYSIS REPORT

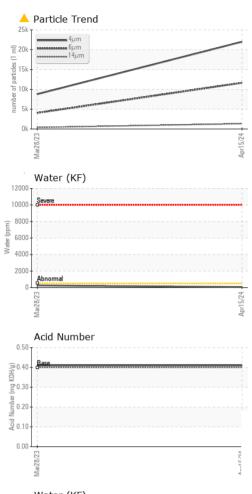

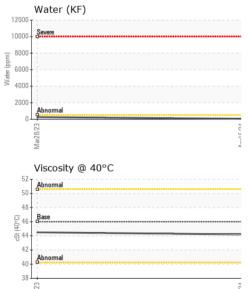

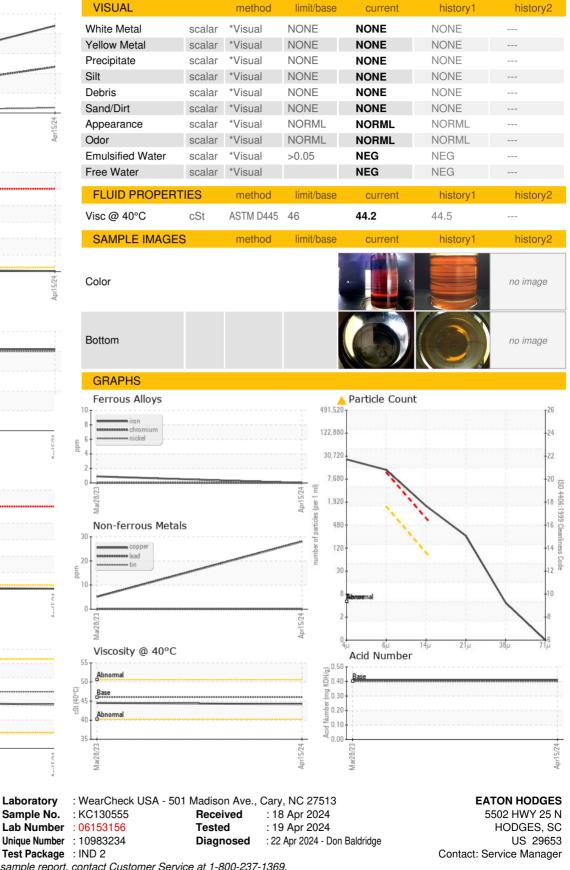

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: F:

Certificate 12367

Laboratory

Contact/Location: Service Manager - EATHOD Page 2 of 2