

## **OIL ANALYSIS REPORT**

### Machine Id INGERSOLL RAND RS160I 1A (S/N MOX1003272)

Component Air Compressor

Fluid **INGERSOLL-RAND ULTRA FG (--- GAL)** 

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

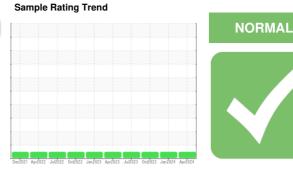



SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0006437	USP0005731	USP0001105
Sample Date		Client Info		17 Apr 2024	21 Jan 2024	16 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>4	0	<1	0
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>40	0	<1	0
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	6
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		74	79	66
Phosphorus	ppm	ASTM D5185m		385	464	389
Zinc	ppm	ASTM D5185m		0	0	7
Sulfur	ppm	ASTM D5185m		768	801	655
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		5	5	5
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water	%	ASTM D6304	>0.6	0.001	0.006	0.005
ppm Water	ppm	ASTM D6304	>6000	15	63	51.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	280	454	156
Particles >6µm		ASTM D7647	>2500	93	124	34
Particles >14µm		ASTM D7647	>320	16	10	3
Particles >21µm		ASTM D7647	>80	5	2	1
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/14/11	16/14/10	14/12/9
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.20	0.18	0.19


Contact/Location: Service Manager - TYSEAG Page 1 of 2





# **OIL ANALYSIS REPORT**

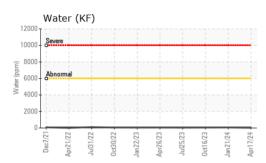

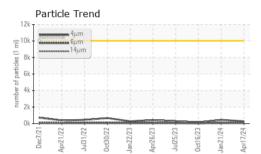

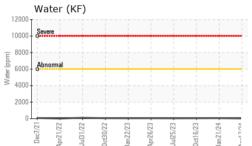






Ē

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.6	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	50.9	51.0	50.5
SAMPLE IMAGES		method	limit/base	current	history1	history2
				-		

Color



Bottom

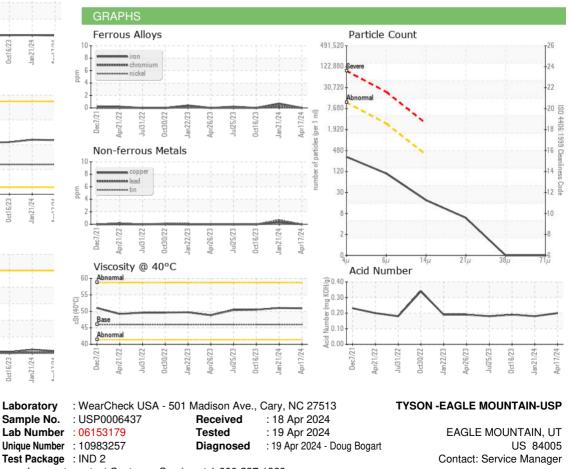

To discuss this sample report, contact Customer Service at 1-800-237-1369

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TYSEAG [WUSCAR] 06153179 (Generated: 04/19/2024 15:05:52) Rev: 1

Certificate 12367

Contact/Location: Service Manager - TYSEAG

T:

F: