


## **OIL ANALYSIS REPORT**



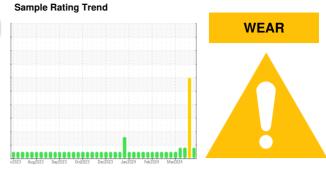

Machine Id HANM01BE (S/N 4EK00133) Biogas Engine

Fluid

CHEVRON HDAX 9500 GAS ENGINE OIL 40 (95 GAL)

DIAGNOSIS	SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
A Recommendation	Sample Number		Client Info		WC0898165	WC0898118	WC0898109
No corrective action is recommended at this time.	Sample Date		Client Info		16 Apr 2024	10 Apr 2024	03 Apr 2024
Resample at the next service interval to monitor.	Machine Age	hrs	Client Info		70260	70116	69971
🔺 Wear	Oil Age	hrs	Client Info		143	1125	980
The tin level is abnormal. All other component wear	Oil Changed		Client Info		Not Changd	Changed	Not Changd
rates are normal.	Sample Status				ABNORMAL	SEVERE	ABNORMAL
<b>Contamination</b> There is no indication of any contamination in the oil.	CONTAMINATIO	N	method	limit/base	current	history1	history2
	Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
luid Condition	Water		WC Method	>.11	NEG	NEG	NEG
The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.	Glycol		WC Method		NEG	NEG	NEG
	WEAR METALS		method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m	>15	2	1	2
	Chromium	ppm	ASTM D5185m	>4	0	<1	0
	Nickel	ppm	ASTM D5185m		0	<1	0
	Titanium	ppm	ASTM D5185m		0	<1	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m	>6	2	3	2
	Lead	ppm	ASTM D5185m	>9	<1	5	<1
	Copper	ppm	ASTM D5185m	>6	<1	<1	1
	Tin	ppm	ASTM D5185m	>4	<u> </u>	<b>A</b> 7	<b>5</b>
	Vanadium	ppm	ASTM D5185m		0	<1	0
	Cadmium	ppm	ASTM D5185m		0	<1	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		16	15	13
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		5	5	3
	Manganese	ppm	ASTM D5185m		<1	<1	<1
	Magnasium	ppm	ASTM D5185m		24	23	19
	Magnesium	ppiii	1101111 20100111				
	Calcium	ppm	ASTM D5185m		1895	2346	2096
	-				1895 308	2346 386	2096 329
	Calcium	ppm	ASTM D5185m				
	Calcium Phosphorus	ppm ppm	ASTM D5185m ASTM D5185m		308	386	329
	Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	308 366 2728	386 500	329 412
	Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		308 366 2728	386 500 3363	329 412 2981
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	>181	308 366 2728 current	386 500 3363 history1	329 412 2981 history2
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	>181 >21	308 366 2728 current 98	386 500 3363 history1 142	329 412 2981 history2 142
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>181 >21	308 366 2728 current 98 1	386 500 3363 history1 142 <1	329 412 2981 history2 142 1
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	>181 >21 >20	308 366 2728 current 98 1 2	386 500 3363 history1 142 <1 4	329 412 2981 history2 142 1 <1
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>181 >21 >20	308 366 2728 current 98 1 2 2 current	386 500 3363 history1 142 <1 4 history1	329 412 2981 history2 142 1 <1 <1 history2
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>181 >21 >20	308 366 2728 current 98 1 2 2 current 0	386 500 3363 history1 142 <1 4 4 history1 0.1	329 412 2981 history2 142 1 <1 <1 history2 0.1
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7844	>181 >21 >20	308 366 2728 current 98 1 2 2 current 0 6.0	386 500 3363 history1 142 <1 4 4 history1 0.1 7.9	329 412 2981 history2 142 1 <1 <1 history2 0.1 7.8
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7824 *ASTM D7415	>181 >21 >20 limit/base	308 366 2728 current 98 1 2 current 0 6.0 17.8	386 500 3363 history1 142 <1 4 history1 0.1 7.9 23.7	329 412 2981 history2 142 1 <1 <1 history2 0.1 7.8 23.3
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7844 *ASTM D7624	>181 >21 >20 limit/base	308 366 2728 current 98 1 2 current 0 6.0 17.8 current	386 500 3363 history1 142 <1 4 history1 0.1 7.9 23.7 history1	329 412 2981 history2 142 1 <1 <1 history2 0.1 7.8 23.3 history2
	Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA Oxidation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7624 *ASTM D7415	>181 >21 >20 limit/base	308 366 2728 current 98 1 2 current 0 6.0 17.8 current 10.8	386 500 3363 history1 142 <1 4 history1 0.1 7.9 23.7 history1 19.4	329 412 2981 history2 142 1 <1 <1 history2 0.1 7.8 23.3 history2 19.2

## Report Id: ENEFIN [WUSCAR] 06153281 (Generated: 04/22/2024 17:58:31) Rev: 1



## **OIL ANALYSIS REPORT**

scalar

scalar

method

\*Visual

\*Visual

\*Visua

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

method

ASTM D445

eb12/24

Aar19/74

lar19/74

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

>.11

13.4

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

curren

NEG

NEG


13.5


VISUAL


White Metal


Yellow Metal














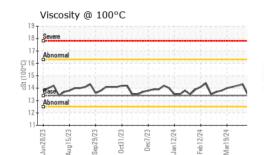

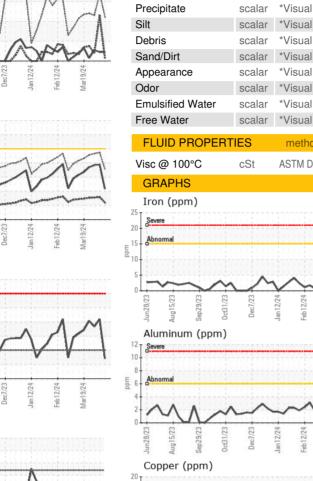



Jan 12/24

-eb12/24

Perl 73

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received


Diagnosed

Tested

Mar19/24

: 18 Apr 2024

: 19 Apr 2024

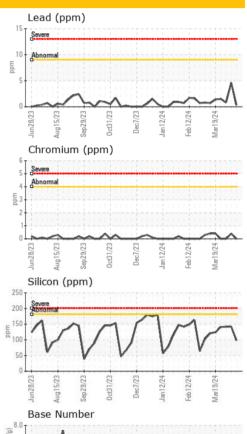

history1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

history

NEG

NEG

14.3

history2

NONE

NONE

NONE

NONE

NONE

NONE

NORML


NORML

history2

NEG


NEG

14.2



**EDL NA Recips-Hancock County** HANCOCK COUNTY POWER STATION, 3574 TOWNSHIP ROAD 142 FINDLAY, OH : 22 Apr 2024 - Sean Felton US 45840





To discuss this sample report, contact Customer Service at 1-800-237-1369.

10

:C/8/01

: WC0898165

50/02 ma

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ENEFIN [WUSCAR] 06153281 (Generated: 04/22/2024 17:58:32) Rev: 1

Submitted By: TIM CUSICK

Contact: TIM CUSICK

tim.cusick@edlenergy.com

Page 2 of 2

T:

F: