




OIL ANALYSIS REPORT

Sample Rating Trend

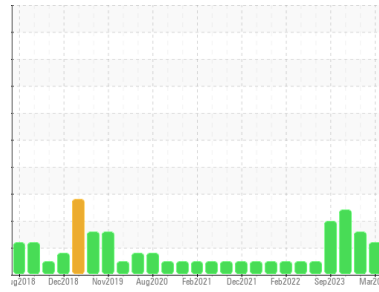

ISO



Area
GUAY SON [CONHER]
 Machine Id
IBACO BM LOPEZ VENTURA
 Component
Diesel Engine
 Fluid
RALOY 15W40 (160 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid: Raloy 15W40)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0014178	KL0014128	KL0013315
Sample Date	Client Info		20 Mar 2024	06 Feb 2024	20 Oct 2023
Machine Age	hrs	Client Info	20819	20446	19040
Oil Age	hrs	Client Info	373	428	610
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ATTENTION	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	1.3
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	7	8	13
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	2	1
Lead	ppm	ASTM D5185m >40	1	<1	1
Copper	ppm	ASTM D5185m >330	2	6	23
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	62	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	34	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	20	8	7
Calcium	ppm	ASTM D5185m	3559	2578	2687
Phosphorus	ppm	ASTM D5185m	978	1088	1058
Zinc	ppm	ASTM D5185m	1110	1295	1424
Sulfur	ppm	ASTM D5185m	4061	3150	3682

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	11	7
Sodium	ppm	ASTM D5185m	<1	0	1
Potassium	ppm	ASTM D5185m >20	0	2	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.7	0.9
Nitration	Abs/cm	*ASTM D7624 >20	6.0	5.3	5.8
Sulfation	Abs/1mm	*ASTM D7415 >30	15.2	14.2	15.2



OIL ANALYSIS REPORT

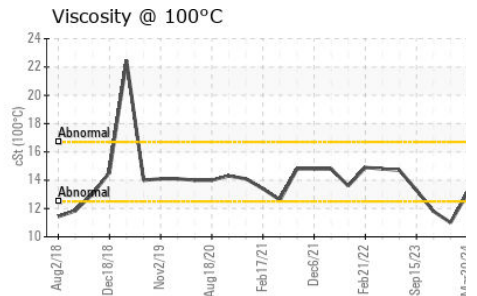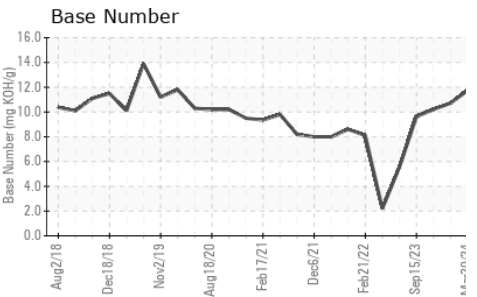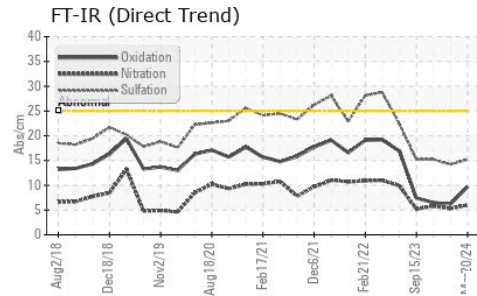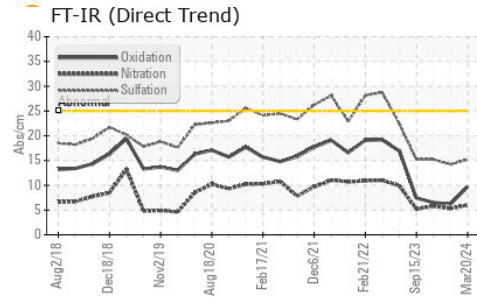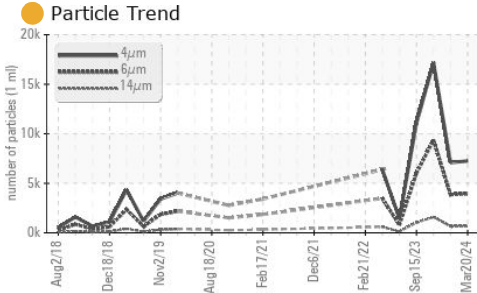





FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		7255	7090	17182
Particles >6µm	ASTM D7647	>5000	3952	3862	▲ 9360
Particles >14µm	ASTM D7647	>640	673	657	▲ 1593
Particles >21µm	ASTM D7647	>160	227	221	▲ 537
Particles >38µm	ASTM D7647	>40	35	34	▲ 83
Particles >71µm	ASTM D7647	>10	4	3	8
Oil Cleanliness	ISO 4406 (c)	>19/16	19/17	19/17	▲ 20/18

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	9.7	6.2	6.5
Base Number (BN)	mg KOH/g ASTM D2896		11.74	10.72	10.21

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		13.1	11.0	11.8

GRAPHS

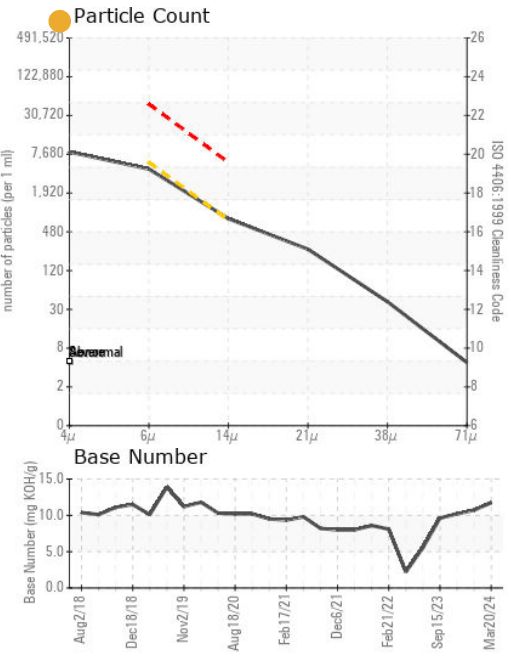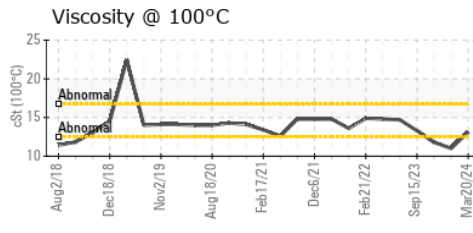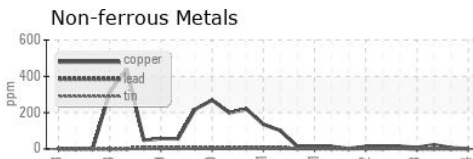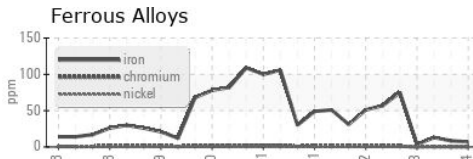

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014178
Lab Number : 06153311
Unique Number : 10983389
Test Package : MOB 2 (Additional Tests: PrtCount)
Received : 18 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140

Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: