




OIL ANALYSIS REPORT

Sample Rating Trend

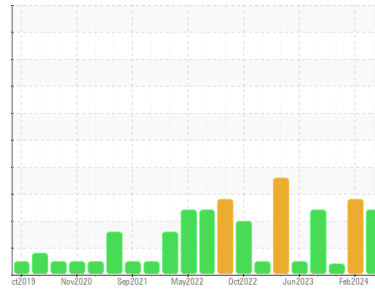

VISCOSITY



Area
GUAY SON [CONHER]
 Machine Id
BM CHUYITO 29 IBACO
 Component
Bottom Diesel Engine
 Fluid
RALOY 15W40 (160 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid: Raloy 15W40)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. Fuel content negligible.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0014518	KL0014123	KL0013411
Sample Date	Client Info			20 Mar 2024	06 Feb 2024	14 Nov 2023
Machine Age	hrs	Client Info		0	0	11578
Oil Age	hrs	Client Info		496	446	750
Oil Changed	Client Info			Not Chngd	Not Chngd	Changed
Sample Status				ATTENTION	ABNORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	14	8	3
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	1
Lead	ppm	ASTM D5185m	>40	2	<1	<1
Copper	ppm	ASTM D5185m	>330	3	2	<1
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		1	10	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	6	4
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		5	9	24
Calcium	ppm	ASTM D5185m		3112	2820	2682
Phosphorus	ppm	ASTM D5185m		1189	1065	1187
Zinc	ppm	ASTM D5185m		1357	1260	1336
Sulfur	ppm	ASTM D5185m		4075	3103	3488

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	8	10
Sodium	ppm	ASTM D5185m		3	2	2
Potassium	ppm	ASTM D5185m	>20	1	2	4
Fuel	%	ASTM D3524	>5	1.6	<1.0	1.5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.9	8.8	4.3
Sulfation	Abs.1mm	*ASTM D7415	>30	18.9	17.9	12.9



OIL ANALYSIS REPORT

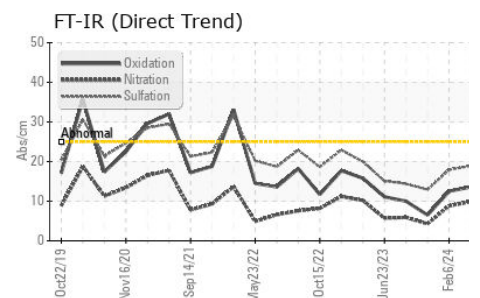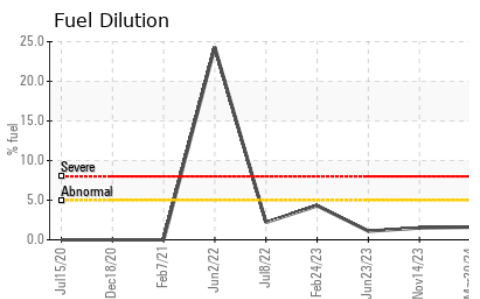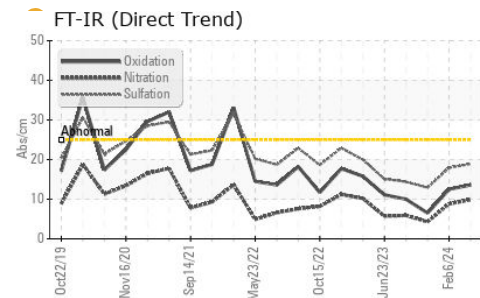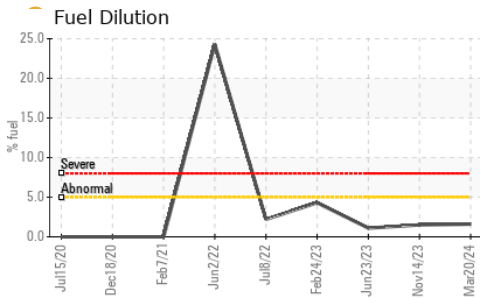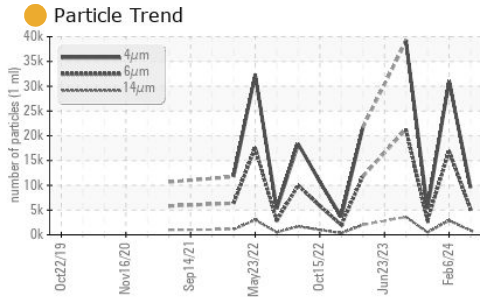






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		9500	31058	5316
Particles >6µm	ASTM D7647	>5000	5175	16919	2896
Particles >14µm	ASTM D7647	>640	881	2879	493
Particles >21µm	ASTM D7647	>160	297	970	166
Particles >38µm	ASTM D7647	>40	46	150	26
Particles >71µm	ASTM D7647	>10	5	15	3
Oil Cleanliness	ISO 4406 (c)	>19/16	20/17	21/19	19/16

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	13.6	12.5	6.5
Base Number (BN)	mg KOH/g ASTM D2896		9.12	10.67	11.06

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		11.9	11.8	12.1

GRAPHS

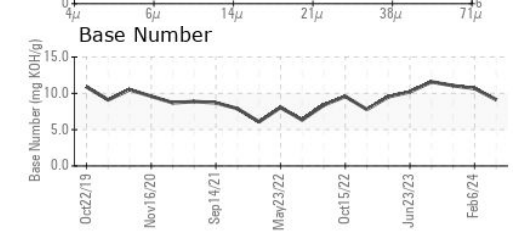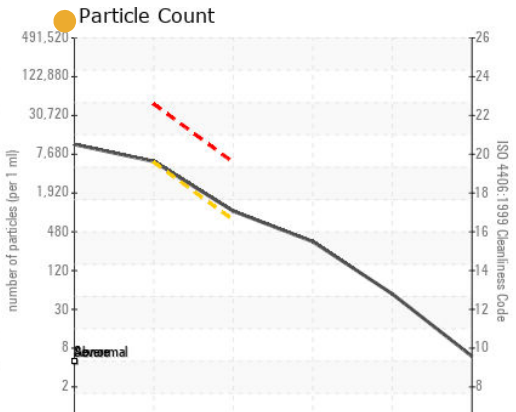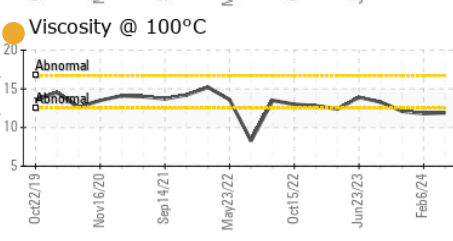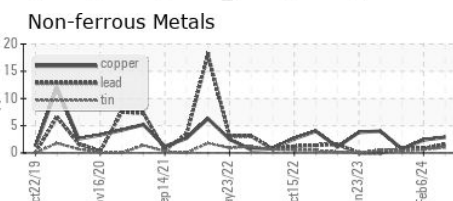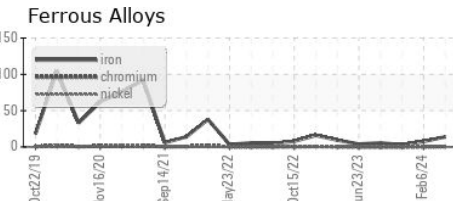

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014518
Lab Number : 06153315
Unique Number : 10983393
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)

Received : 18 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Jonathan Hester

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140

Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (526)622-1581 x:81

F: x: