




# OIL ANALYSIS REPORT

Sample Rating Trend

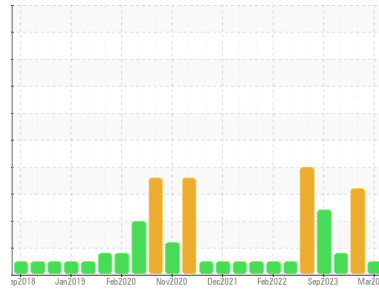

**NORMAL**



Area

**GUAY SON [CONHER]**

Machine Id

**IBACO BM IBACO BM LOPEZ VENTURA AUX-1**

Component

**Diesel Engine**

Fluid

**RALOY 15W40 (8 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Fluid: Raloy 15W40 )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0014179</b>	KL0014130	KL0013316
Sample Date	Client Info		<b>20 Mar 2024</b>	06 Feb 2024	20 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0	16228
Oil Age	hrs	Client Info	<b>160</b>	144	1400
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 2.7	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>21</b>	22	72
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	1	1
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>46</b>	0	2
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>37</b>	0	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>22</b>	4	16
Calcium	ppm	ASTM D5185m	<b>3684</b>	2566	2826
Phosphorus	ppm	ASTM D5185m	<b>938</b>	1031	1096
Zinc	ppm	ASTM D5185m	<b>1097</b>	1246	1487
Sulfur	ppm	ASTM D5185m	<b>3805</b>	3006	3455

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	9	12
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	3


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.6	▲ 4.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	6.5	11.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.6</b>	15.1	24.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

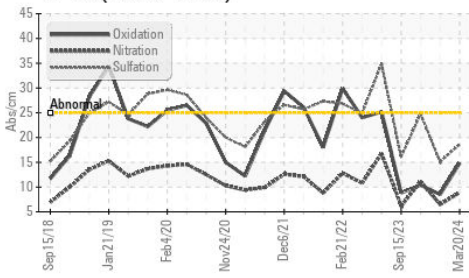


Particle Trend

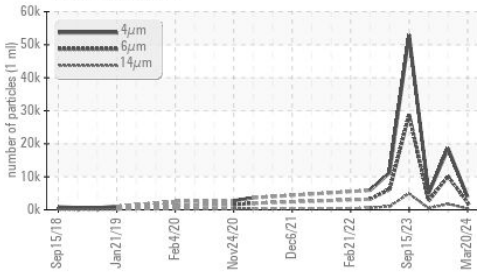


Base Number

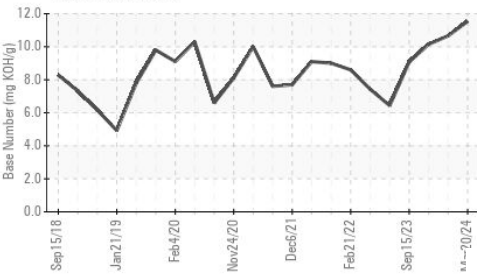

Viscosity @ 100°C

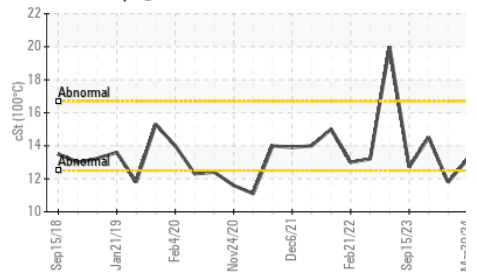

Particle Trend

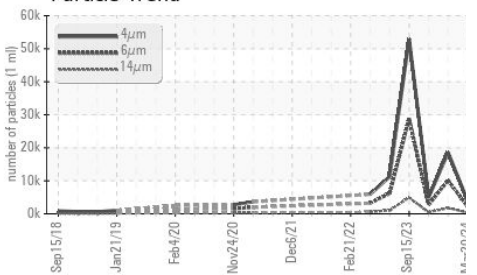

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>3941</b>	18582	4994
Particles >6µm	ASTM D7647	>5000	<b>2147</b>	▲ 10123	2720
Particles >14µm	ASTM D7647	>640	<b>365</b>	▲ 1723	463
Particles >21µm	ASTM D7647	>160	<b>123</b>	▲ 580	156
Particles >38µm	ASTM D7647	>40	<b>19</b>	▲ 90	24
Particles >71µm	ASTM D7647	>10	<b>2</b>	9	2
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>18/16</b>	▲ 21/18	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414 >25	<b>14.8</b>	8.5	10.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>11.54</b>	10.66	10.15

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.2</b>	● 11.8	14.5

## GRAPHS


Ferrous Alloys

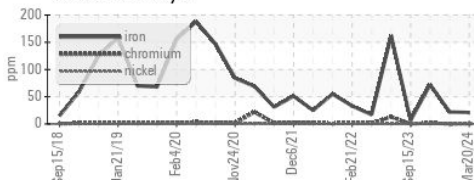


Non-ferrous Metals

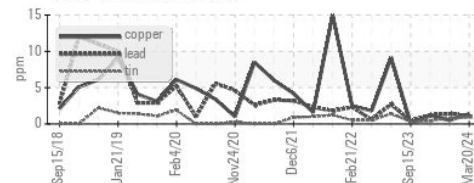


Viscosity @ 100°C

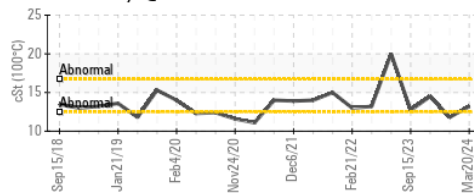

Particle Count

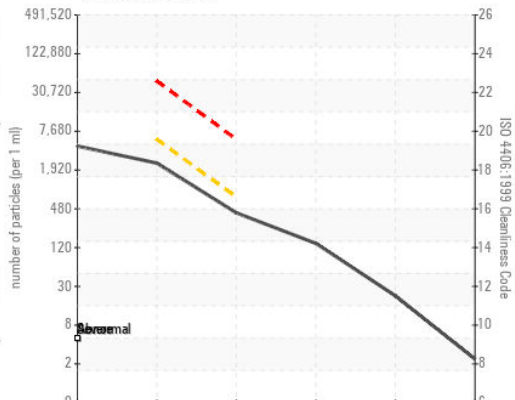

Base Number

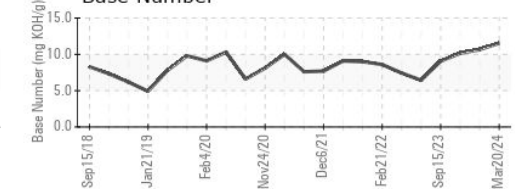

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014179  
**Lab Number** : **06153316**  
**Unique Number** : 10983394  
**Test Package** : MOB 2 ( Additional Tests : PrtCount )  
**Received** : 18 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 23 Apr 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140

Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: