




OIL ANALYSIS REPORT

Sample Rating Trend

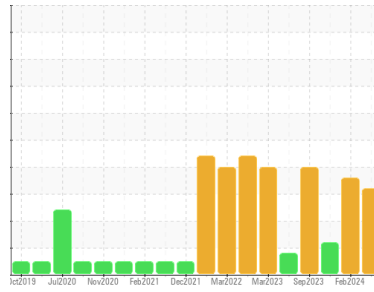

FUEL



Area
GUAY SON [CONHER]
 Machine Id
BM SONORENSE II MAIN ENGINE
 Component
Bottom Diesel Engine
 Fluid
RALOY 15W40 (160 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid: Raloy 15W40)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. Light fuel dilution occurring.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0014181	KL0014134	KL0013408
Sample Date	Client Info		20 Mar 2024	06 Feb 2024	14 Nov 2023
Machine Age	hrs	Client Info	12146	11664	10628
Oil Age	hrs	Client Info	348	554	780
Oil Changed	Client Info		Not Chngd	Changed	Changed
Sample Status			ATTENTION	ABNORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	8	8	8
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	1	1	1
Lead	ppm	ASTM D5185m >40	<1	<1	<1
Copper	ppm	ASTM D5185m >330	4	7	9
Tin	ppm	ASTM D5185m >15	<1	1	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	8
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	1	1	4
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m	7	6	16
Calcium	ppm	ASTM D5185m	2929	2533	2639
Phosphorus	ppm	ASTM D5185m	1143	1041	1202
Zinc	ppm	ASTM D5185m	1309	1242	1309
Sulfur	ppm	ASTM D5185m	4259	3037	3420

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	11	14
Sodium	ppm	ASTM D5185m	0	<1	1
Potassium	ppm	ASTM D5185m >20	<1	2	<1
Fuel	%	ASTM D3524 >5	▲ 2.9	▲ 4.2	▲ 3.5


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.2	6.9	6.4
Sulfation	Abs./1mm	*ASTM D7415 >30	14.3	14.5	14.5




OIL ANALYSIS REPORT


Particle Trend

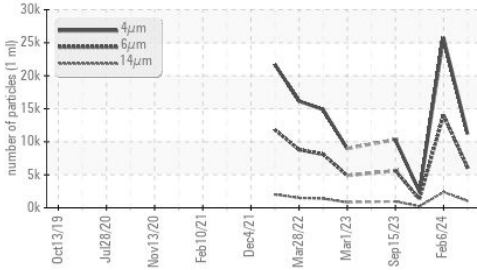


Fuel Dilution

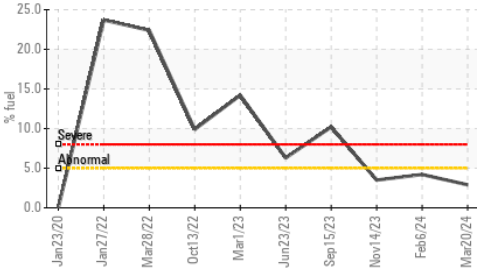


FT-IR (Direct Trend)

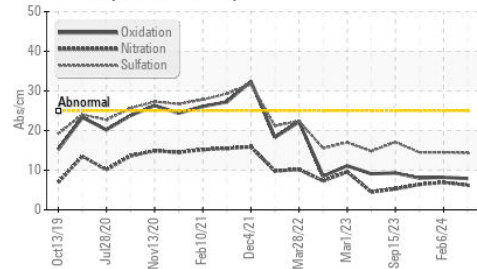

Fuel Dilution

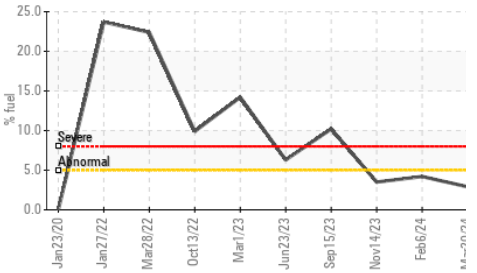

FT-IR (Direct Trend)

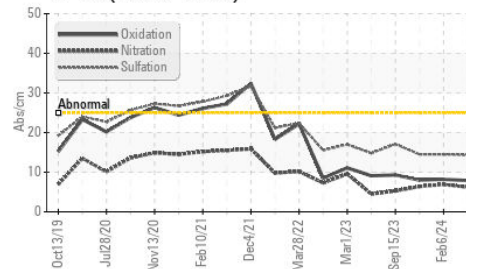

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		11197	25760	2419
Particles >6µm	ASTM D7647	>5000	6099	▲ 14033	1318
Particles >14µm	ASTM D7647	>640	1038	▲ 2388	224
Particles >21µm	ASTM D7647	>160	350	▲ 804	76
Particles >38µm	ASTM D7647	>40	54	▲ 124	12
Particles >71µm	ASTM D7647	>10	6	▲ 13	1
Oil Cleanliness	ISO 4406 (c)	>19/16	20/17	▲ 21/18	18/15


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	7.9	8.2	8.0
Base Number (BN)	mg KOH/g ASTM D2896		9.94	10.76	10.34

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		11.3	▲ 10.3	● 10.8

GRAPHS


Ferrous Alloys

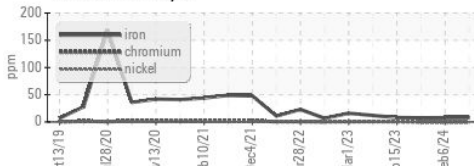


Non-ferrous Metals

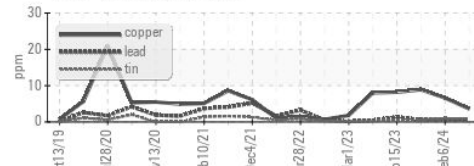


Viscosity @ 100°C

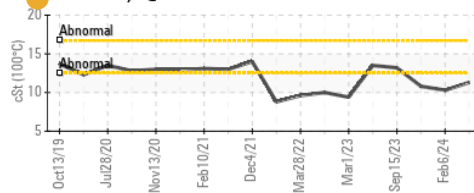

Particle Count

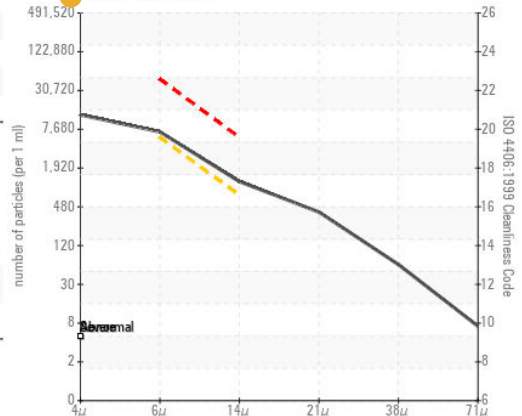

Base Number

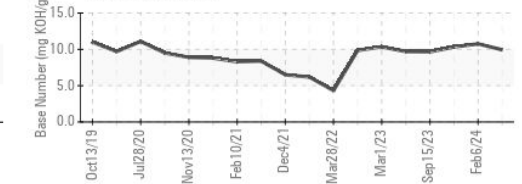

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014181 **Received** : 18 Apr 2024
Lab Number : 06153323 **Tested** : 23 Apr 2024
Unique Number : 10983401 **Diagnosed** : 23 Apr 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140

Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: