




# OIL ANALYSIS REPORT

## Sample Rating Trend

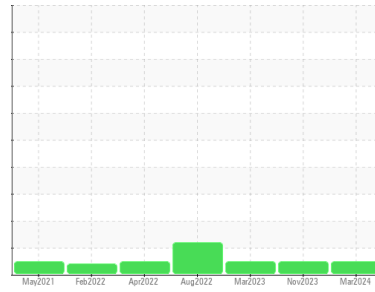

**NORMAL**



Machine Id

**FSP141725**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0912502</b>	WC0874108	WC0797940
Sample Date	Client Info		<b>21 Mar 2024</b>	03 Nov 2023	15 Mar 2023
Machine Age	mls	Client Info	<b>0</b>	98602	0
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>4</b>	9	32
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	9
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	8
Copper	ppm	ASTM D5185m >330	<b>2</b>	3	33
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>1</b>	<1	0
Barium	ppm	ASTM D5185m 10	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 100	<b>59</b>	62	65
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185m 450	<b>966</b>	971	989
Calcium	ppm	ASTM D5185m 3000	<b>1058</b>	1084	1069
Phosphorus	ppm	ASTM D5185m 1150	<b>1099</b>	997	907
Zinc	ppm	ASTM D5185m 1350	<b>1242</b>	1206	1221
Sulfur	ppm	ASTM D5185m 4250	<b>3880</b>	3579	3209

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	9
Sodium	ppm	ASTM D5185m >158	<b>3</b>	0	6
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	19

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.6	1.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.1</b>	8.0	12.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	20.1	24.4


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	16.1	20.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.4</b>	9.8	8.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

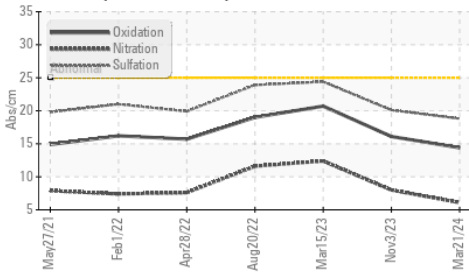

Base Number

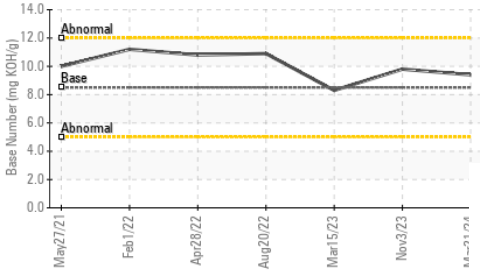

Viscosity @ 100°C

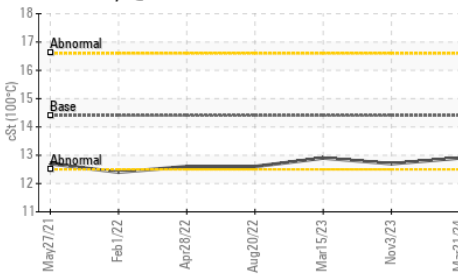


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	12.7

## GRAPHS


Ferrous Alloys

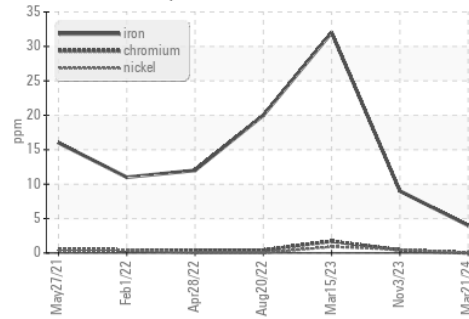


Non-ferrous Metals

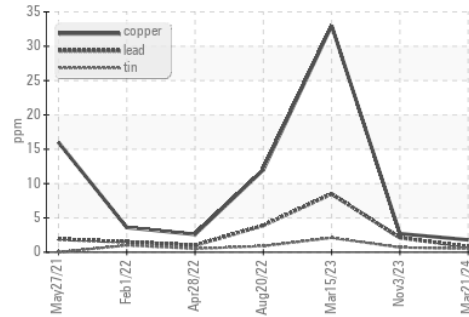

Viscosity @ 100°C

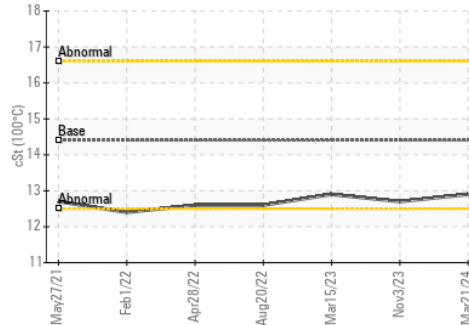

Base Number

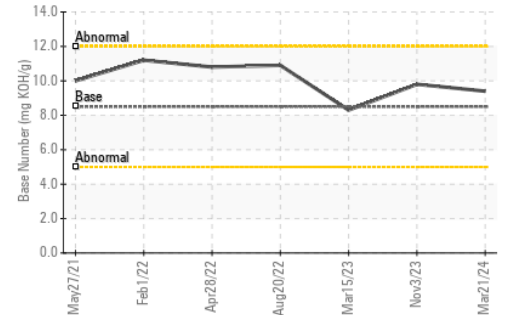

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0912502

Lab Number : 06153620

Unique Number : 10983698

Test Package : FLEET

Received : 18 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 19 Apr 2024 - Wes Davis

FRESHPOINT

8801 EXCHANGE DRIVE

ORLANDO, FL

US 32809

Contact: CRAIG EVANS

evans\_craig@sbcglobal.net

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)