

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id HC2226 - DW Component Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0893092		
Sample Date		Client Info		13 Apr 2024		
Machine Age	hrs	Client Info		8369		
Oil Age	hrs	Client Info		926		
Oil Changed	1110	Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATION		method	limit/base		history1	history2
Water	N	WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	-	history1	history2
Iron	nom	ASTM D5185m	>20	2		
Chromium	ppm		>10	2 <1		
Nickel	ppm		>10			
	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m		2		
Lead	ppm	ASTM D5185m	>10	2		
Copper	ppm	ASTM D5185m	>75	3		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	1		
Molybdenum	ppm	ASTM D5185m	5	2		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	11		
Calcium	ppm	ASTM D5185m	200	74		
Phosphorus	ppm	ASTM D5185m	300	277		
Zinc	ppm	ASTM D5185m	370	345		
Sulfur	ppm	ASTM D5185m	2500	2009		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	3		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<mark> </mark> 8513		
Particles >6µm		ASTM D7647	>1300	976		
Particles >14µm		ASTM D7647	>160	42		
Particles >21µm		ASTM D7647	>40	10		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	e 20/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.36		
:29:33) Rev: 1	5 0				JOHN HAWKIN	


Report Id: BUCWILTX [WUSCAR] 06153767 (Generated: 04/19/2024 19:29:33) Rev: 1


Contact/Location: JOHN HAWKINS - BUCWILTX



OIL ANALYSIS REPORT

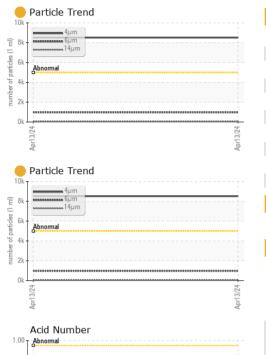



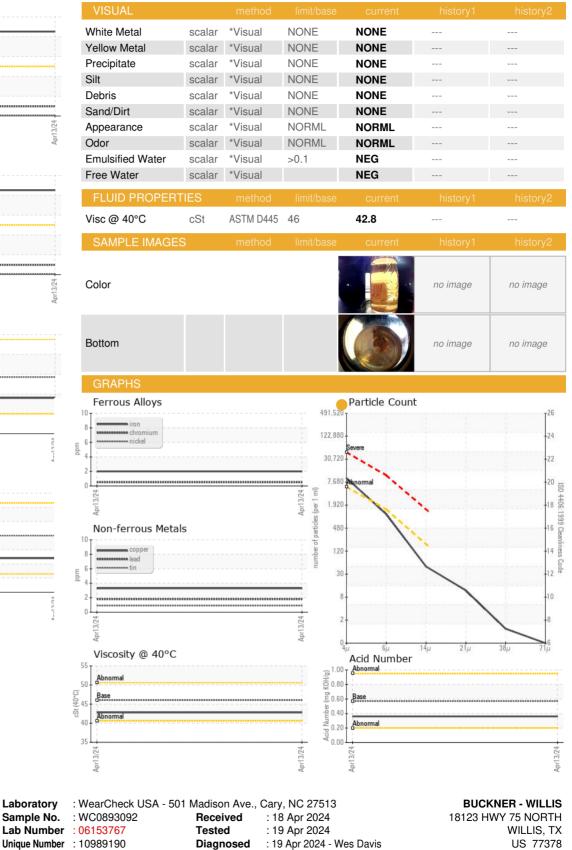



Test Package : CONST Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: JOHN HAWKINS johnh@bucknercompanies.com T:

F:

Laboratory

Sample No.

Contact/Location: JOHN HAWKINS - BUCWILTX

Page 2 of 2