




# OIL ANALYSIS REPORT

Sample Rating Trend

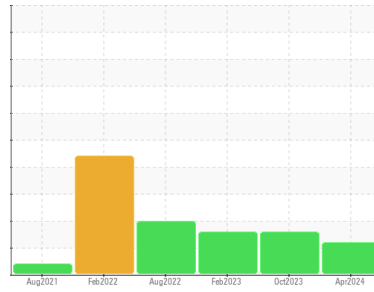

ISO



Machine Id  
**KAESER AS 25T 7488368 (S/N 1545)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>KC125376</b>    | KC107539    | KC112370    |
| Sample Date        | Client Info |             |            | <b>04 Apr 2024</b> | 05 Oct 2023 | 07 Feb 2023 |
| Machine Age        | hrs         | Client Info |            | <b>4186</b>        | 3281        | 7638        |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | Changed     | Not Changed |
| Sample Status      |             |             |            | <b>ATTENTION</b>   | ABNORMAL    | ABNORMAL    |

| WEAR METALS |     | method      | limit/base | current  | history1 | history2 |
|-------------|-----|-------------|------------|----------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <1       | 0        | 0        |
| Chromium    | ppm | ASTM D5185m | >10        | <1       | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >3         | <1       | 0        | 0        |
| Titanium    | ppm | ASTM D5185m | >3         | <1       | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b> | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>2</b> | 0        | 0        |
| Lead        | ppm | ASTM D5185m | >10        | <1       | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >50        | <b>2</b> | 5        | 1        |
| Tin         | ppm | ASTM D5185m | >10        | <1       | <1       | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <1       | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <1       | 0        | 0        |






| ADDITIVES  |     | method      | limit/base | current   | history1 | history2 |
|------------|-----|-------------|------------|-----------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>  | 0        | 0        |
| Barium     | ppm | ASTM D5185m | 90         | <b>10</b> | 0        | <1       |
| Molybdenum | ppm | ASTM D5185m |            | <1        | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <1        | <1       | 0        |
| Magnesium  | ppm | ASTM D5185m | 90         | <b>66</b> | 38       | 73       |
| Calcium    | ppm | ASTM D5185m | 2          | <b>5</b>  | 1        | <1       |
| Phosphorus | ppm | ASTM D5185m |            | <b>4</b>  | <1       | 2        |
| Zinc       | ppm | ASTM D5185m |            | <b>7</b>  | 0        | 0        |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <1           | 0        | 0        |
| Sodium       | ppm | ASTM D5185m |            | <b>20</b>    | 19       | 20       |
| Potassium    | ppm | ASTM D5185m | >20        | <b>5</b>     | 7        | 3        |
| Water        | %   | ASTM D6304  | >0.05      | <b>0.022</b> | 0.024    | 0.028    |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>224</b>   | 242.3    | 284.4    |

| FLUID CLEANLINESS |  | method       | limit/base | current           | history1   | history2   |
|-------------------|--|--------------|------------|-------------------|------------|------------|
| Particles >4µm    |  | ASTM D7647   |            | <b>1917</b>       | 2620       | 8783       |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>576</b>        | 1248       | ▲ 3806     |
| Particles >14µm   |  | ASTM D7647   | >80        | ● <b>83</b>       | ▲ 299      | ▲ 403      |
| Particles >21µm   |  | ASTM D7647   | >20        | ● <b>30</b>       | ▲ 119      | ▲ 57       |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>3</b>          | ▲ 10       | 2          |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>          | 1          | 0          |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | ● <b>18/16/14</b> | ▲ 19/17/15 | ▲ 20/19/16 |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.4        | <b>0.34</b> | 0.27     | 0.31     |


# OIL ANALYSIS REPORT

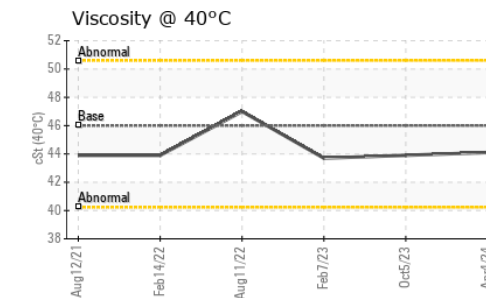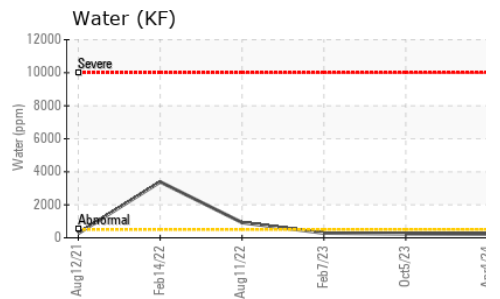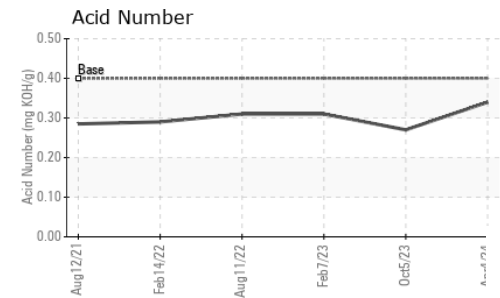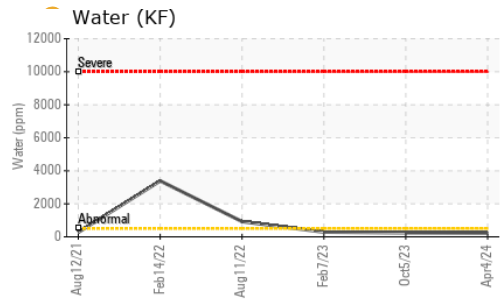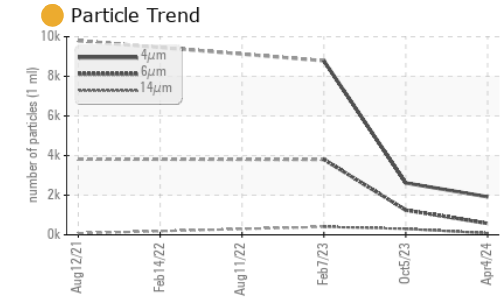



| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | 44.1    | 43.9     | 43.7     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

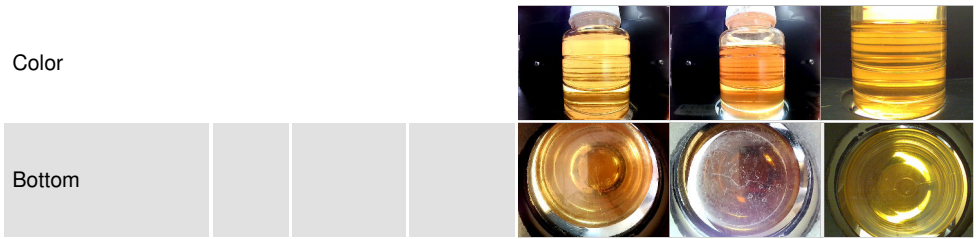

## GRAPHS

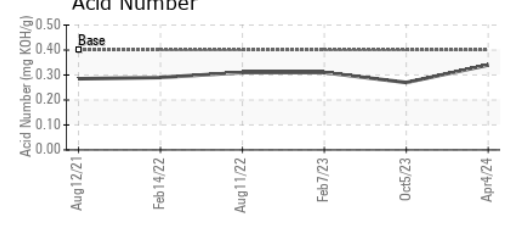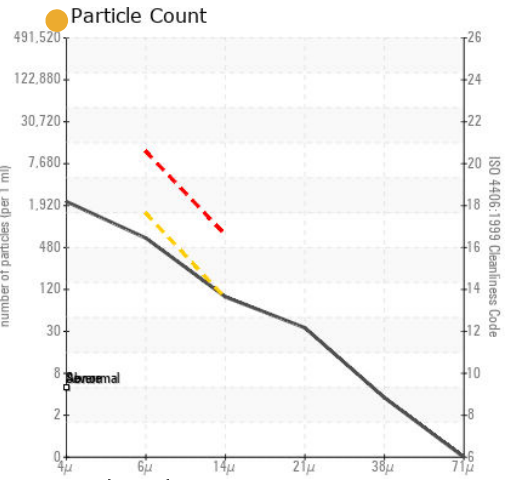

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC125376  
**Lab Number** : 06153782  
**Unique Number** : 10989205  
**Test Package** : IND 2

**Received** : 18 Apr 2024  
**Tested** : 19 Apr 2024  
**Diagnosed** : 23 Apr 2024 - Don Baldrige

**ORLANDO KITCHEN AND BATH**  
 440 W GRANT ST  
 ORLANDO, FL  
 US 32806  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)