

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# 6727335 (S/N 1135) Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM    | <b>IATION</b> | method       | limit/base | current           | history1    | history2 |
|------------------|---------------|--------------|------------|-------------------|-------------|----------|
| Sample Number    |               | Client Info  |            | KCPA013696        | KCP54516    |          |
| Sample Date      |               | Client Info  |            | 15 Apr 2024       | 28 Feb 2023 |          |
| Machine Age      | hrs           | Client Info  |            | 21316             | 19781       |          |
| Oil Age          | hrs           | Client Info  |            | 0                 | 6800        |          |
| Oil Changed      |               | Client Info  |            | Changed           | Changed     |          |
| Sample Status    |               |              |            | ATTENTION         | NORMAL      |          |
| WEAR METALS      |               | method       | limit/base | current           | history1    | history2 |
| Iron             | ppm           | ASTM D5185m  | >50        | <1                | <1          |          |
| Chromium         | ppm           | ASTM D5185m  | >10        | <1                | 0           |          |
| Nickel           | ppm           | ASTM D5185m  | >3         | <1                | 0           |          |
| Titanium         | ppm           | ASTM D5185m  | >3         | <1                | 0           |          |
| Silver           | ppm           | ASTM D5185m  | >2         | 0                 | <1          |          |
| Aluminum         | ppm           | ASTM D5185m  | >10        | 2                 | <1          |          |
| Lead             | ppm           | ASTM D5185m  | >10        | 1                 | 0           |          |
| Copper           | ppm           | ASTM D5185m  | >50        | 7                 | 12          |          |
| Tin              | ppm           | ASTM D5185m  | >10        | <1                | 0           |          |
| Vanadium         | ppm           | ASTM D5185m  |            | <1                | 0           |          |
| Cadmium          | ppm           | ASTM D5185m  |            | <1                | 0           |          |
| ADDITIVES        |               | method       | limit/base | current           | history1    | history2 |
| Boron            | ppm           | ASTM D5185m  | 0          | 0                 | 0           |          |
| Barium           | ppm           | ASTM D5185m  | 90         | 3                 | 0           |          |
| Molybdenum       | ppm           | ASTM D5185m  | 0          | <1                | 0           |          |
| Manganese        | ppm           | ASTM D5185m  |            | <1                | 0           |          |
| Magnesium        | ppm           | ASTM D5185m  | 100        | 31                | <1          |          |
| Calcium          | ppm           | ASTM D5185m  | 0          | 4                 | 0           |          |
| Phosphorus       | ppm           | ASTM D5185m  | 0          | 5                 | 3           |          |
| Zinc             | ppm           | ASTM D5185m  | 0          | 27                | 7           |          |
| Sulfur           | ppm           | ASTM D5185m  | 23500      | 22410             | 18175       |          |
| CONTAMINANTS     |               | method       | limit/base | current           | history1    | history2 |
| Silicon          | ppm           | ASTM D5185m  | >25        | <1                | 3           |          |
| Sodium           | ppm           | ASTM D5185m  |            | 14                | 0           |          |
| Potassium        | ppm           | ASTM D5185m  | >20        | 3                 | 0           |          |
| Water            | %             | ASTM D6304   | >0.05      | 0.013             | 0.007       |          |
| ppm Water        | ppm           | ASTM D6304   | >500       | 137               | 78.6        |          |
| FLUID CLEANLIN   | ESS           | method       | limit/base | current           | history1    | history2 |
| Particles >4µm   |               | ASTM D7647   |            | 8210              | 1473        |          |
| Particles >6µm   |               | ASTM D7647   | >1300      | <u> </u>          | 601         |          |
| Particles >14µm  |               | ASTM D7647   | >80        | <b>e</b> 152      | 18          |          |
| Particles >21µm  |               | ASTM D7647   | >20        | <mark> </mark> 51 | 3           |          |
| Particles >38µm  |               | ASTM D7647   | >4         | 2                 | 0           |          |
| Particles >71µm  |               | ASTM D7647   | >3         | 0                 | 0           |          |
| Oil Cleanliness  |               | ISO 4406 (c) | >/17/13    | <b>20/18/14</b>   | 18/16/11    |          |
| FLUID DEGRADA    |               | method       | limit/base | current           | history1    | history2 |
| Acid Number (AN) | mg KOH/g      | ASTM D8045   | 1.0        | 0.42              | 0.37        |          |
| × /              | J J           |              |            |                   |             |          |

Contact/Location: VINCENT MUNIZ - POSHAY Page 1 of 2




# **OIL ANALYSIS REPORT**

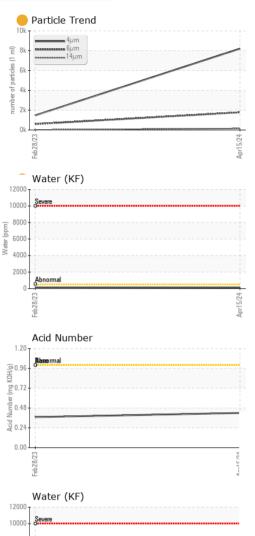

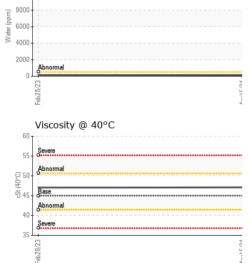

Certificate 12367

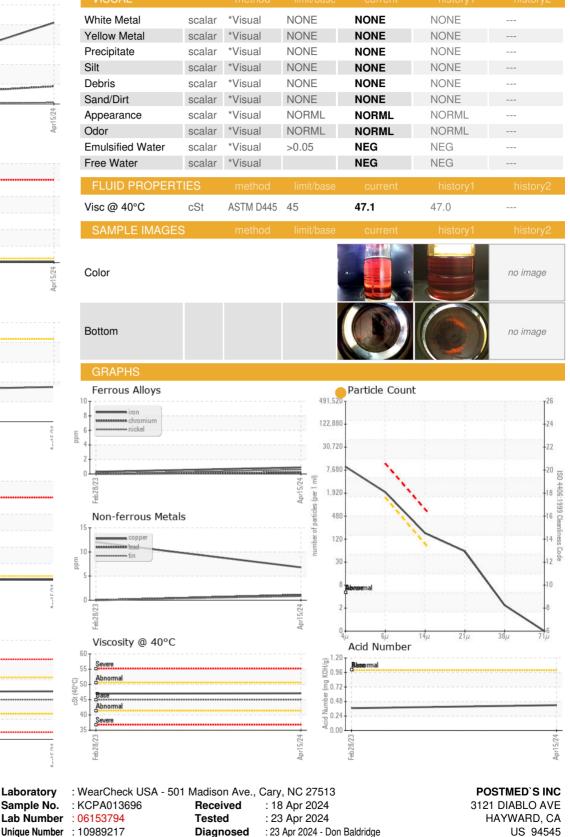



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: POSHAY [WUSCAR] 06153794 (Generated: 04/23/2024 11:16:56) Rev: 1

Laboratory

Sample No.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact/Location: VINCENT MUNIZ - POSHAY

T:

F:

Contact: VINCENT MUNIZ

vincent.muniz@truepill.com