OIL ANALYSIS REPORT

Sample Rating Trend

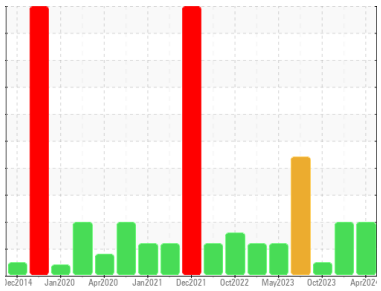

ISO

Machine Id
BT-F01-B1 (S/N B1 RECYCLE BLOWER)
Component
Inboard Blower
Fluid
SHELL TELLUS S2 MX 100 (--- GAL)

DIAGNOSIS

Recommendation
Filter oil if possible using B6=75 filter media or better. No other actions needed at this time. Resample at next normal interval. REISSUE: This sample is for the Drive end BLOWER bearing, not the motor.

Wear
Wear is low and acceptable.

Contamination
Contaminant levels are typical for new oil from the drum.

Fluid Condition
Fluid health is acceptable for continued use.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PLS0000292**	PLS0000788	PLS0000775
Sample Date		Client Info		**17 Apr 2024**	31 Jan 2024	24 Oct 2023
Machine Age	mths	Client Info		**3**	3	0
Oil Age	mths	Client Info		**0**	0	1
Oil Changed		Client Info		**N/A**	N/A	Changed
Sample Status				**ABNORMAL**	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		**13**	12	17
Iron	ppm	ASTM D5185m	>20	**<1**	0	4
Chromium	ppm	ASTM D5185m	>20	**0**	0	0
Nickel	ppm	ASTM D5185m	>20	**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	<1
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**0**	0	0
Lead	ppm	ASTM D5185m	>20	**<1**	0	0
Copper	ppm	ASTM D5185m	>20	**<1**	1	0
Tin	ppm	ASTM D5185m	>20	**<1**	0	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	0	0
Barium	ppm	ASTM D5185m		**0**	<1	0
Molybdenum	ppm	ASTM D5185m		**0**	0	0
Manganese	ppm	ASTM D5185m		**<1**	<1	0
Magnesium	ppm	ASTM D5185m		**67**	66	33
Calcium	ppm	ASTM D5185m		**4**	2	0
Phosphorus	ppm	ASTM D5185m		**315**	293	235
Zinc	ppm	ASTM D5185m		**351**	355	324
Sulfur	ppm	ASTM D5185m		**1049**	788	529

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**0**	<1	<1
Sodium	ppm	ASTM D5185m		**2**	0	<1
Potassium	ppm	ASTM D5185m	>20	**2**	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		**0**	0	0
Nitration	Abs/cm	*ASTM D7624		**1.8**	1.8	1.9
Sulfation	Abs/.1mm	*ASTM D7415		**10.7**	10.5	10.8

OIL ANALYSIS REPORT

Particle Count

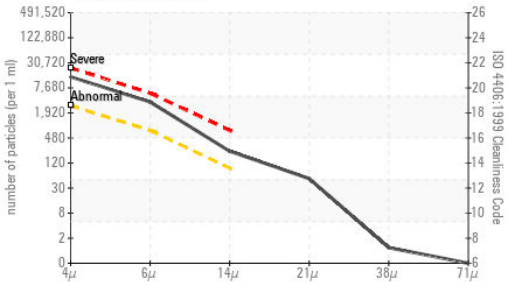

Particle Trend

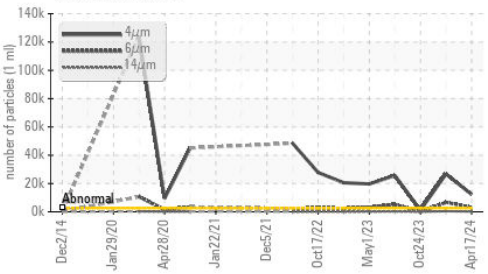

FT-IR (Direct Trend)

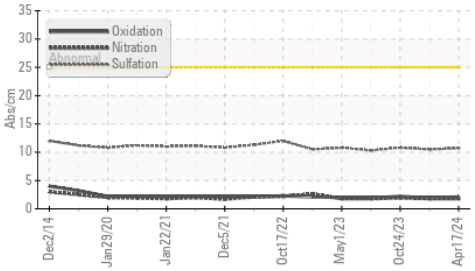

Acid Number

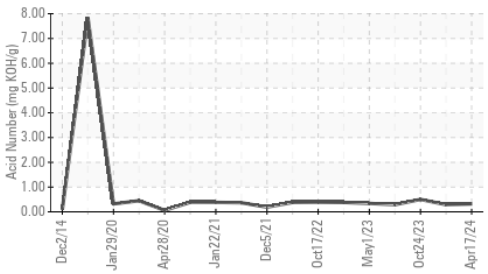

Viscosity @ 40°C

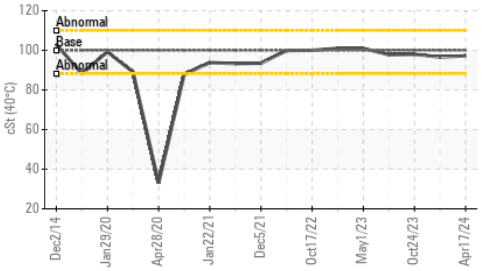

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	▲ **12276**	▲ 26730	1174
Particles >6µm		ASTM D7647	>640	▲ **3064**	▲ 6716	162
Particles >14µm		ASTM D7647	>80	▲ **203**	▲ 425	15
Particles >21µm		ASTM D7647	>20	▲ **45**	▲ 91	6
Particles >38µm		ASTM D7647	>4	**1**	4	3
Particles >71µm		ASTM D7647	>3	**0**	0	3
Oil Cleanliness		ISO 4406 (c)	>18/16/13	▲ **21/19/15**	▲ 22/20/16	17/15/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		**2.1**	1.9	2.2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.32**	0.29	0.50

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**LIGHT**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual		**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	100	**97.2**	96.6	98.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PLS0000292 **Received** : 19 Apr 2024
Lab Number : 06154201 **Tested** : 06 May 2024
Unique Number : 10989624 **Diagnosed** : 09 May 2024 - Mike Johnson
Test Package : IND 2 (Additional Tests: FT-IR, PQ, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HEXION - BAYTOWN PLANT
8450 WEST BAY RD
BAYTOWN, TX
US 77520
Contact: BILL MINER
bill.miner@momentive.com
T:
F:

Report Id: MOMBAY [WUSCAR] 06154201 (Generated: 05/11/2024 16:19:38) Rev: 2

Contact/Location: BILL MINER - MOMBAY