


# **OIL ANALYSIS REPORT**

Sample Rating Trend

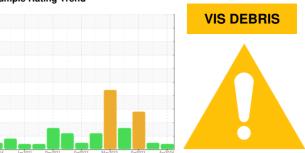

Machine Id

# BT-F01-B1M (S/N B1 RECYCLE BLOWER MOTOR)

Non-Drive End Bearing

SHELL TURBO T ISO 32 (--- GAL)

### **DIAGNOSIS**

### Recommendation

Visible debris in the sample prevented a proper particle count. Filter oil if possible using B6=75 filter media or better. Confirm oil sampling techniques. Resample at next normal interval, or immediately if desiring a proper particle count.

Wear particles are low and steady.

### Contamination

Particle contamination was not conducted due to visible particulate. Review seals and breathers. Review oil sampling techniques. Filtration can help extend machine life.


### **Fluid Condition**


Fluid health indicators are acceptable for continued

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PLS0000300	PLS0000790	PLS0000773
Sample Date		Client Info		17 Apr 2024	31 Jan 2024	24 Oct 2023
Machine Age	mths	Client Info		3	3	0
Oil Age	mths	Client Info		0	0	1
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		34	13	8
Iron	ppm	ASTM D5185m	>20	6	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1 0	history2 0
	ppm ppm		limit/base			
Boron	• • • • • • • • • • • • • • • • • • • •	ASTM D5185m	limit/base	0	0	0
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	0 0	0 <1	0
Boron Barium Molybdenum	ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0	0 <1 0	0 0 0
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1	0 <1 0 <1	0 0 0
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1 <1 2 16	0 <1 0 <1 <1 <1 <1 <1 <1 <1 3 19	0 0 0 0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1 <1 2	0 <1 0 <1 <1 <1 <1 <1 <1 <1 <1	0 0 0 0 0 0 0 35
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1 <1 2 16	0 <1 0 <1 <1 <1 <1 <1 <1 <1 3 19	0 0 0 0 0 0 0 0 35
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1 <1 2 16	0 <1 0 <1 <1 <1 <1 <1 <1 3 19 7	0 0 0 0 0 0 0 35
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 0 0 <1 <1 2 16 0	0 <1 0 <1 0 <1 <1 <1 3 19 7 749	0 0 0 0 0 0 0 35 0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base	0 0 0 <1 <1 <1 2 16 0 580	0 <1 0 <1 3 19 7 749 history1	0 0 0 0 0 0 35 0 ▲ 2263
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15	0 0 0 <1 <1 2 16 0 580 current	0 <1 0 <1 0 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1	0 0 0 0 0 0 0 35 0 ▲ 2263 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15	0 0 0 <1 <1 2 16 0 580 current 0 2	0 <1 0 <1 0 <1 <1 <1 3 19 7 749 history1 0 0	0 0 0 0 0 0 0 35 0 ▲ 2263 history2 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15 >20	0 0 0 <1 <1 2 16 0 580 current 0 2	0 <1 0 <1 3 19 7 749 history1 0 0 0	0 0 0 0 0 0 0 35 0 ▲ 2263 history2 <1 1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15 >20	0 0 0 <1 <1 2 16 0 580 current 0 2 0	0 <1 0 <1 3 19 7 749 history1 0 0 history1	0 0 0 0 0 0 35 0 ▲ 2263 history2 <1 1 0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >15 >20	0 0 0 <1 <1 2 16 0 580 current 0 current	0 <1 0 <1 0 <1 <1 <1 3 19 7 749 history1 0 0 0 history1 0	0 0 0 0 0 0 35 0 ▲ 2263 history2 <1 1 0 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  *ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >15 >20	0 0 0 <1 <1 2 16 0 580 current 0 2 0 current 0	0 <1 0 <1 0 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1	0 0 0 0 0 0 35 0 2263 history2 <1 1 0 history2 0 2.1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D76145	limit/base >15 >20 limit/base	0 0 0 <1 <1 2 16 0 580  current 0 2 0 current 0 1.7 10.9	0 <1 0 <1 0 <1 <1 3 19 7 749 history1 0 0 0 history1 0 1.8 10.7	0 0 0 0 0 0 35 0 ▲ 2263 history2 <1 1 0 history2 0 2.1 11.2




## **OIL ANALYSIS REPORT**

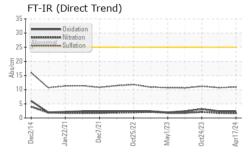




Viscosity @ 40°C

120

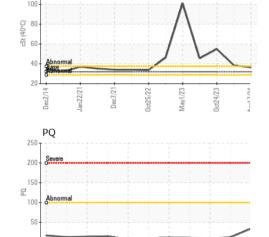

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	36.4	38.4	▲ 54.9
SAMPLE IMAGES		method	limit/base	current	history1	history2

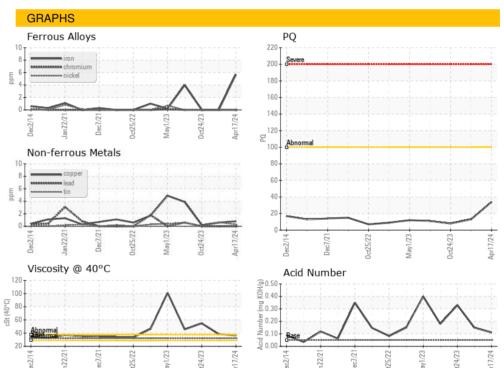





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06154205 Unique Number : 10989628

Color

**Bottom** 

: PLS0000300

Received **Tested** Diagnosed

: 19 Apr 2024 : 07 May 2024

: 08 May 2024 - Mike Johnson

Test Package : IND 2 (Additional Tests: FT-IR, PQ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HEXION - BAYTOWN PLANT** 

8450 WEST BAY RD BAYTOWN, TX US 77520

Contact: BILL MINER bill.miner@momentive.com

T:

Report Id: MOMBAY [WUSCAR] 06154205 (Generated: 05/11/2024 16:19:50) Rev: 1

Contact/Location: BILL MINER - MOMBAY

F: