

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id EARTHQUAKE

Component Main Hydraulic System Fluid CONOCO MEGAFLOW AW 46 (120 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



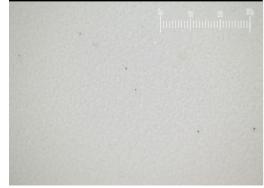

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		PH0001395	PH0002747		
Sample Date		Client Info		18 Apr 2024	07 Mar 2024		
Machine Age	days	Client Info		20	120		
Oil Age	days	Client Info		0	0		
Oil Changed		Client Info		N/A	N/A		
Sample Status				ABNORMAL	ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2	
Water		WC Method	>0.05	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	1	2		
Chromium	ppm	ASTM D5185m	>20	1	<1		
Nickel	ppm	ASTM D5185m	>20	0	0		
Titanium	ppm	ASTM D5185m		0	0		
Silver	ppm	ASTM D5185m		0	0		
Aluminum	ppm	ASTM D5185m	>20	0	0		
Lead	ppm	ASTM D5185m	>20	<1	0		
Copper	ppm	ASTM D5185m	>20	2	1		
Tin	ppm	ASTM D5185m	>20	<1	0		
Vanadium	ppm	ASTM D5185m		0	0		
Cadmium	ppm	ASTM D5185m		0	0		
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0		
Barium	ppm	ASTM D5185m		0	0		
Molybdenum	ppm	ASTM D5185m		0	0		
Manganese	ppm	ASTM D5185m		<1	0		
Magnesium	ppm	ASTM D5185m		1	0		
Calcium	ppm	ASTM D5185m		47	48		
Phosphorus	ppm	ASTM D5185m		348	308		
Zinc	ppm	ASTM D5185m		446	399		
Sulfur	ppm	ASTM D5185m		997	826		
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<1	<1		
Sodium	ppm	ASTM D5185m		3	2		
Potassium	ppm	ASTM D5185m	>20	1	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>640	10249	▲ 13116		
Particles >6µm		ASTM D7647	>160	140	133		
Particles >14µm		ASTM D7647	>10	9	4		
Particles >21µm		ASTM D7647	>3	2	1		
Particles >38µm		ASTM D7647	>3	0	0		
Particles >71µm		ASTM D7647	>3	0	0		
Oil Cleanliness		ISO 4406 (c)	>16/14/10	1 21/14/10	2 1/14/9		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	0.40	0.37		
8:03:12) Rev: 1							

Report Id: UNIUNICALI [WUSCAR] 06154322 (Generated: 04/24/2024 08:03:12) Rev: 1

Contact/Location: TS WAREHOUSE - UNIUNICALI

E 0.20

Pio 0.1 0.00

52

50 41

() 0€046

ني 44 42

> 38 Mar7/24

Abnorm 40

Viscosity @ 40°C

OIL ANALYSIS REPORT

method


limit/base


current

history1

history2

VISUAL

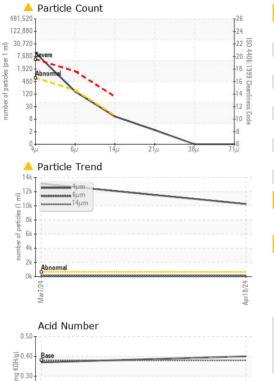

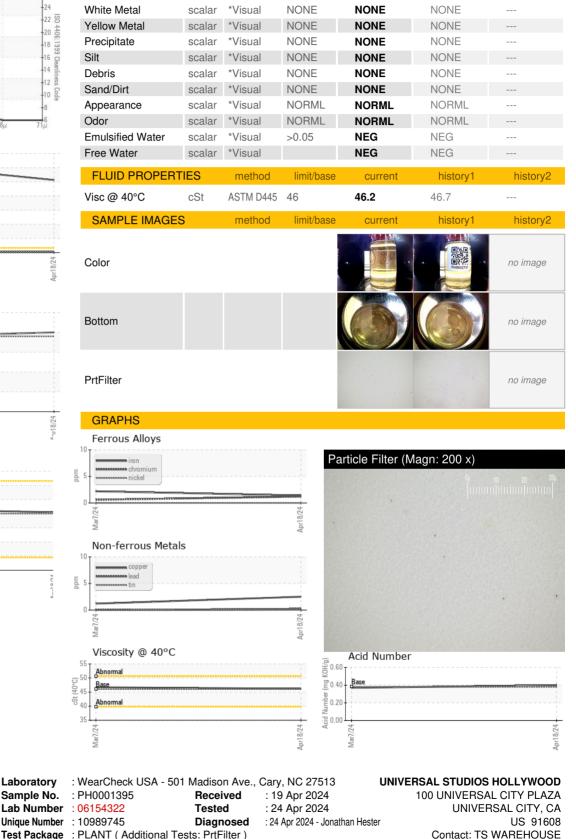

Test Package : PLANT (Additional Tests: PrtFilter) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

-r18/24

Report Id: UNIUNICALI [WUSCAR] 06154322 (Generated: 04/24/2024 08:03:13) Rev: 1

Laboratory

Sample No.

Contact/Location: TS WAREHOUSE - UNIUNICALI

T:

F:

ts.warehouse@nbcuni.com