




OIL ANALYSIS REPORT

Sample Rating Trend

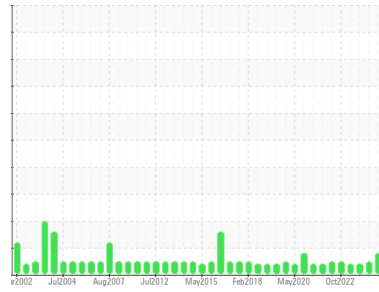

SEDIMENT



Area

BARRIER DEPARTMENT SAMPLES

Machine Id

DAVIS STAND WEB 10 C SARAN (S/N J5342)

Component

Gearbox

Fluid

TEXACO MEROPA 220 (15 GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0913489	WC0821036	WC0806430
Sample Date	Client Info		18 Apr 2024	08 Oct 2023	16 May 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	29	27	17
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	2	0	0
Tin	ppm	ASTM D5185m	>25	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	3.2	0	0	0
Barium	ppm	ASTM D5185m	0.5	0	0	0
Molybdenum	ppm	ASTM D5185m	1.1	9	7	4
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0.1	4	3	0
Calcium	ppm	ASTM D5185m	1.6	53	4	3
Phosphorus	ppm	ASTM D5185m	159	210	257	163
Zinc	ppm	ASTM D5185m	0.5	16	0	0
Sulfur	ppm	ASTM D5185m	10342	10037	8723	7264

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	10	11	6
Sodium	ppm	ASTM D5185m		4	<1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	0

FLUID CLEANLINESS



	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	---	13356	---
Particles >6µm	ASTM D7647	>5000	---	2809	---
Particles >14µm	ASTM D7647	>640	---	292	---
Particles >21µm	ASTM D7647	>160	---	62	---
Particles >38µm	ASTM D7647	>40	---	5	---
Particles >71µm	ASTM D7647	>10	---	3	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	---	21/19/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.24	0.37	0.25




OIL ANALYSIS REPORT

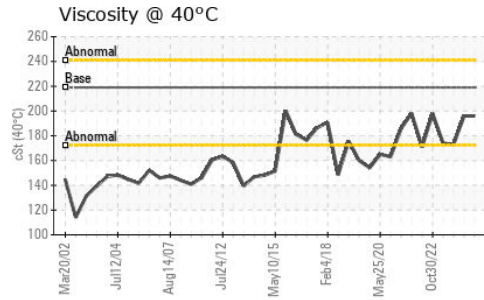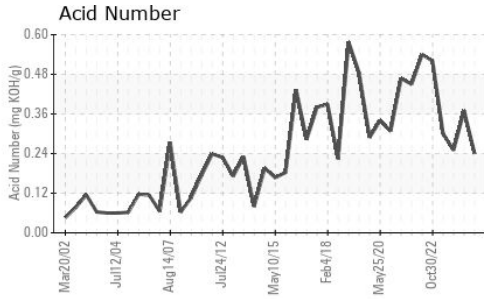





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	▲ MODER	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	219	196	173

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

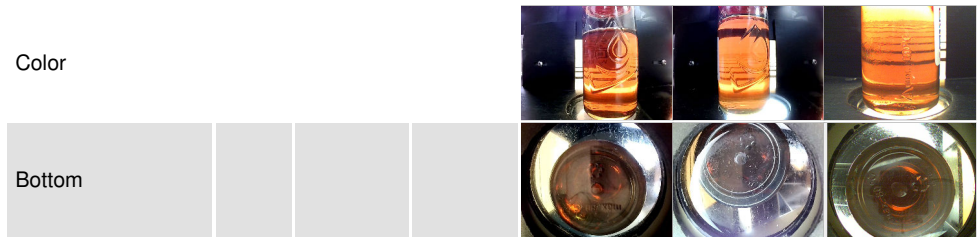

GRAPHS

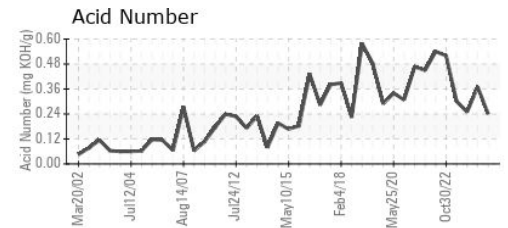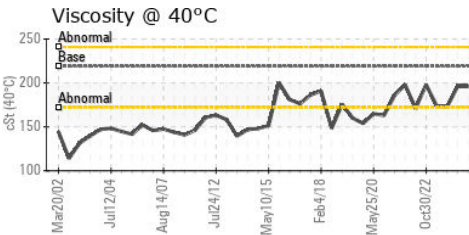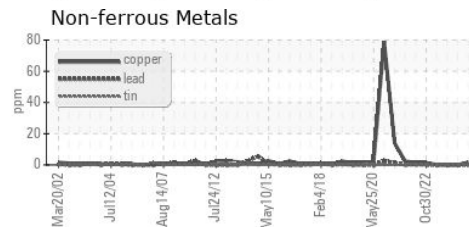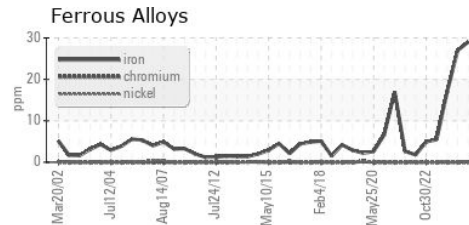

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0913489
Lab Number : 06154334
Unique Number : 10989757
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 19 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Jonathan Hester

SEALED AIR CORP - CRYOVAC DIVISION
 1301 WEST MAGNOLIA AVE
 IOWA PARK, TX
 US 76367

Contact: KEVIN KETCHERSID
 kevin.a.ketchersid@sealedair.com

T: (940)592-2111

F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)