


## **OIL ANALYSIS REPORT**

Sample Rating Trend

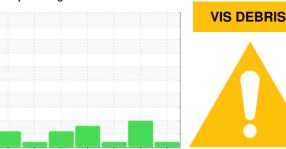

Machine Id

# KAESER BSD 50 6208388 (S/N 1808)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil.


#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012667	KCPA003238	KCP40844
Sample Date		Client Info		13 Apr 2024	12 Jul 2023	27 Jan 2022
Machine Age	hrs	Client Info		30425	27036	18225
Oil Age	hrs	Client Info		3387	0	5300
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	16	10	10
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	1	19
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	1	0	20
Calcium	ppm		0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	0	11
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	20868	17236	15858
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	11
Sodium	ppm	ASTM D5185m		4	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water	%	ASTM D6304	>0.05	0.013	0.005	0.010
ppm Water	ppm	ASTM D6304	>500	137	55.3	104.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647			8155	6597
Particles >6µm		ASTM D7647	>1300		<b>▲</b> 3093	<b>1675</b>
Particles >14μm		ASTM D7647	>80		<u> </u>	80
Particles >21µm		ASTM D7647	>20		<b>△</b> 30	19
Particles >38μm		ASTM D7647	>4		1	1
Particles >71μm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13		<u>20/19/14</u>	18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2




## **OIL ANALYSIS REPORT**

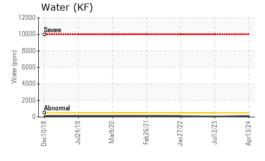





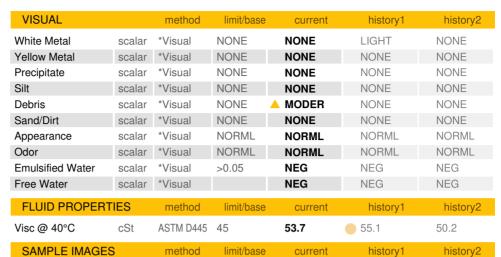



Color







#### **GRAPHS**

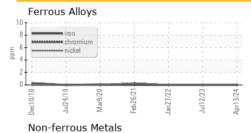





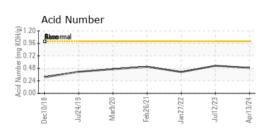





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA012667 Lab Number : 06154355 Unique Number : 10989778

Received Tested Diagnosed

: 19 Apr 2024 : 22 Apr 2024

: 22 Apr 2024 - Doug Bogart

**ARAMARK UNIFORMS** 1900 EMPIRE CENTRAL DALLAS, TX US 75235 Contact:

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ARADAL [WUSCAR] 06154355 (Generated: 04/22/2024 08:44:38) Rev: 1

Contact/Location: ? ? - ARADAL

T:

F: