


### **OIL ANALYSIS REPORT**

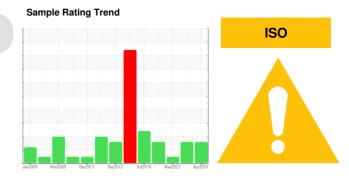

Machine Id

# KAESER ASD-25 2752858 (S/N 1155)

Component Compressor Fluid

KAESER SIGMA (OEM) FG-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA015338	KCP53625	KCP51200	
Sample Date		Client Info		15 Apr 2024	22 May 2023	23 May 2022	
Machine Age	hrs	Client Info		55676	49935	42922	
Oil Age	hrs	Client Info		0	7014	3465	
Oil Changed		Client Info		Changed	Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	0	
Nickel	ppm	ASTM D5185m	>3	0	<1	0	
Titanium	ppm	ASTM D5185m	>3	0	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	1	3	
Lead	ppm	ASTM D5185m	>10	0	0	0	
Copper	ppm	ASTM D5185m	>50	3	<1	4	
Tin	ppm	ASTM D5185m	>10	<1	<1	0	
Antimony	ppm	ASTM D5185m					
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		<1	<1	0	
Magnesium	ppm	ASTM D5185m		0	<1	0	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m	500	112	11	89	
Zinc	ppm	ASTM D5185m	000	119	0	87	
Sulfur	ppm	ASTM D5185m		831	24	976	
	ppin		limit/base				
CONTAMINANTS		method		current	history1	history2	
Silicon	ppm		>25	0	0	0	
Sodium	ppm	ASTM D5185m	00	2	1	<1	
Potassium	ppm		>20	0	2	0	
Water	%	ASTM D6304		0.003	0.00	0.002	
ppm Water	ppm	ASTM D6304	>500	36	0.00	16.4	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	1005	25251	20171	5075	
Particles >6µm		ASTM D7647		▲ 7814	<b>4607</b>	1058	
Particles >14µm		ASTM D7647	>80	<b>4</b> 37	▲ 162	77	
Particles >21µm		ASTM D7647		<u> </u>	<u>▲</u> 38	25	
Particles >38µm		ASTM D7647	>4	1	1	1	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/20/16	▲ 22/19/15	20/17/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN) 44:45) Rev: 1	mg KOH/g	ASTM D8045	1.5 0.49 0.43 0.62 Contact/Location: SERVICE MANAGER ? - VANDAL				


Report Id: VANDAL [WUSCAR] 06154356 (Generated: 04/22/2024 08:44:45) Rev: 1




## **OIL ANALYSIS REPORT**

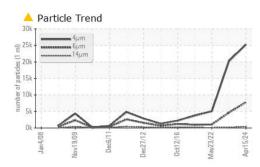

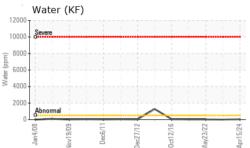


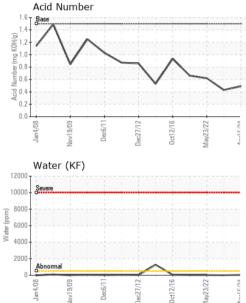




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	47.5	47.7	47.87
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Color



Bottom

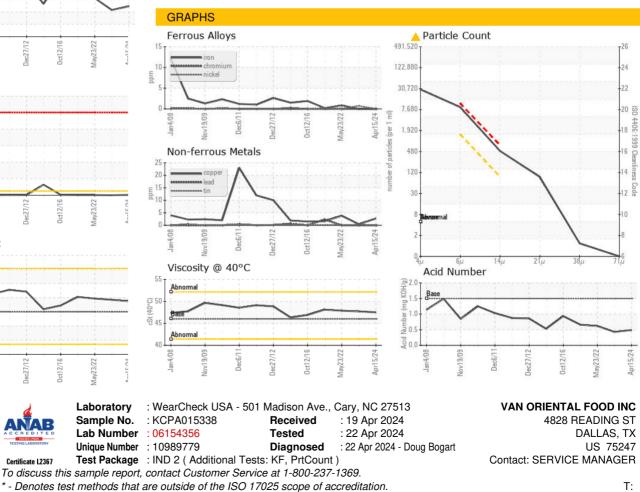

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: VANDAL [WUSCAR] 06154356 (Generated: 04/22/2024 08:44:45) Rev: 1

Certificate 12367

Contact/Location: SERVICE MANAGER ? - VANDAL

F: