




# OIL ANALYSIS REPORT

Sample Rating Trend

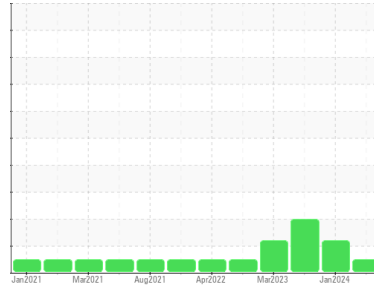

**NORMAL**



Machine Id  
**LINE 9 MAIN (SOUTH) (S/N C1237000034)**  
 Component  
**Vacuum Pump**  
 Fluid  
**USPI VAC 100 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>USPM36759</b>	USPM31735	USPM29298
Sample Date	Client Info			<b>18 Apr 2024</b>	02 Jan 2024	19 Aug 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>54</b>	33	50
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	<1
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>20	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	6
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	2
Calcium	ppm	ASTM D5185m	0	<b>45</b>	70	216
Phosphorus	ppm	ASTM D5185m	1800	<b>889</b>	771	715
Zinc	ppm	ASTM D5185m	0	<b>7</b>	22	67
Sulfur	ppm	ASTM D5185m	0	<b>234</b>	286	1175






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>6</b>	4	7
Sodium	ppm	ASTM D5185m		<b>14</b>	9	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	3
Water	%	ASTM D6304	>.1	<b>0.028</b>	0.034	0.040
ppm Water	ppm	ASTM D6304	>1000	<b>284</b>	349	405.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>1219</b>	842	---
Particles >6µm		ASTM D7647	>1300	<b>285</b>	300	---
Particles >14µm		ASTM D7647	>160	<b>20</b>	48	---
Particles >21µm		ASTM D7647	>40	<b>6</b>	16	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	2	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/11</b>	17/15/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	<b>0.11</b>	0.102	0.25



# OIL ANALYSIS REPORT

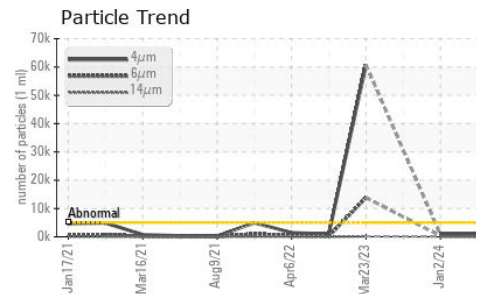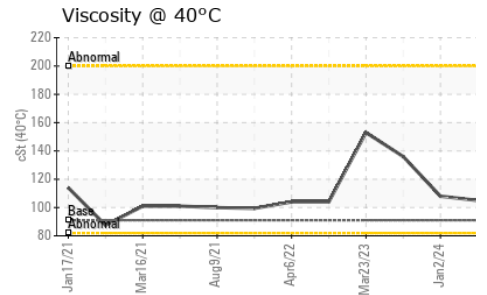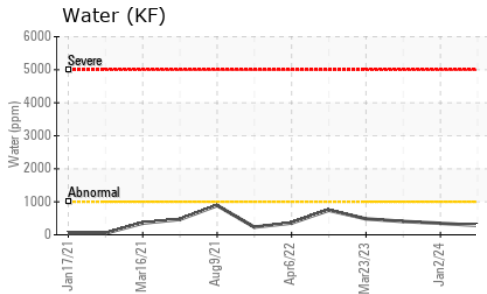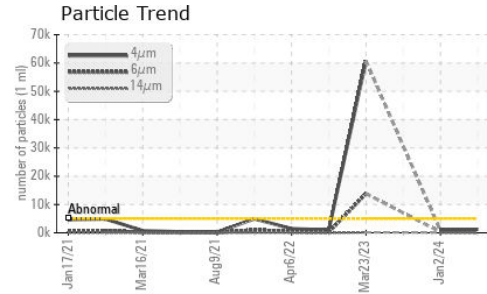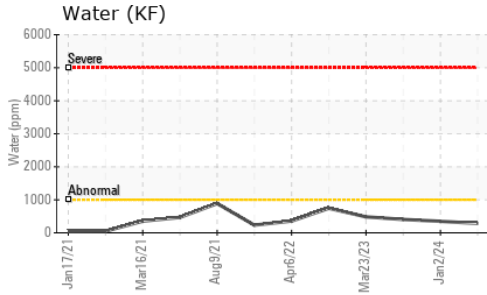


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	105	108	136

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------






Color



Bottom



## GRAPHS

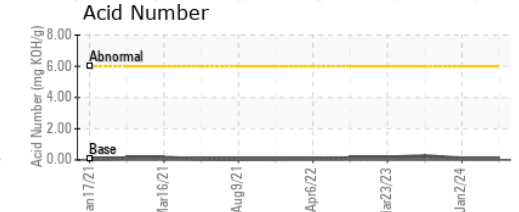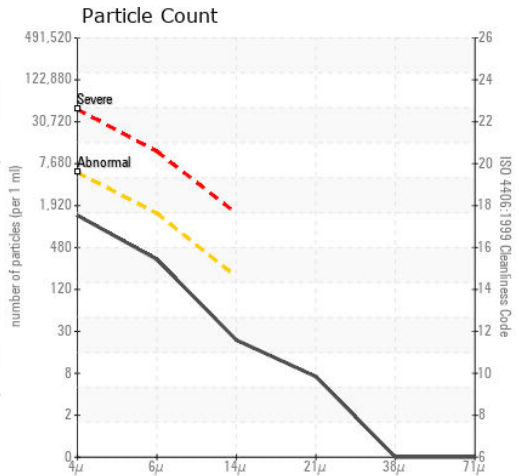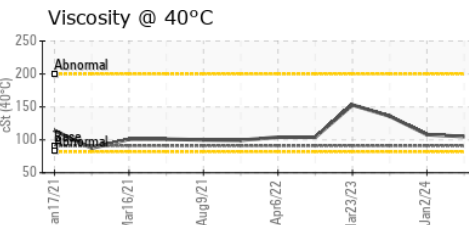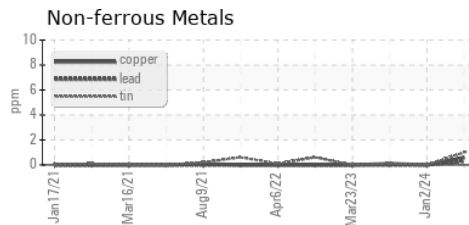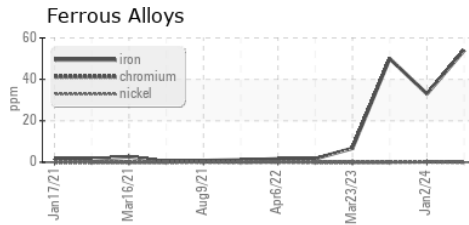

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : USPM36759  
 Lab Number : 06154382  
 Unique Number : 10989805  
 Test Package : IND 2

Received : 19 Apr 2024  
 Tested : 22 Apr 2024  
 Diagnosed : 22 Apr 2024 - Doug Bogart

**TYSON HILLSHIRE - SAINT JOSEPH**  
 5807 MITCHELL AVE  
 SAINT JOSEPH, MO  
 US 64507  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: