



# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Machine Id

**2594**

Component

**Front Differential**

Fluid

**GEAR OIL SAE 75W90 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RW0005073</b>	---	---
Sample Date	Client Info			<b>08 Apr 2024</b>	---	---
Machine Age	mls	Client Info		<b>159923</b>	---	---
Oil Age	mls	Client Info		<b>69000</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>70</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>9</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>199</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>5</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1232</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>2</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>23757</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>21</b>	---	---
Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	<b>2.09</b>	---	---



# OIL ANALYSIS REPORT

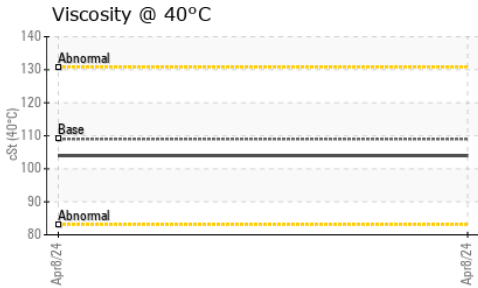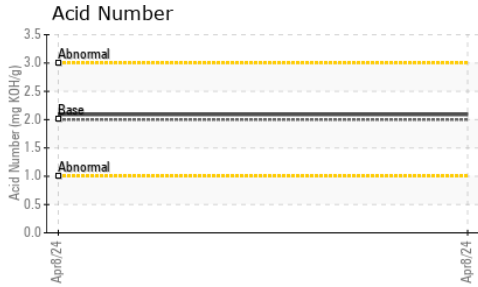









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	104	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

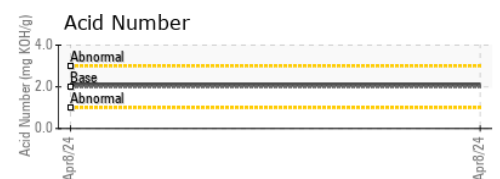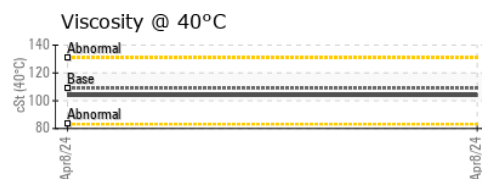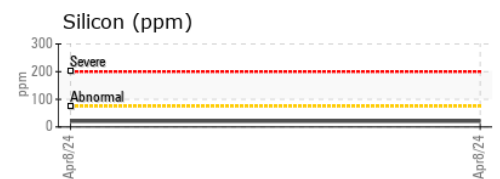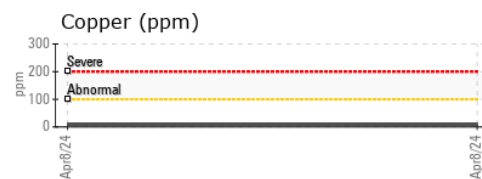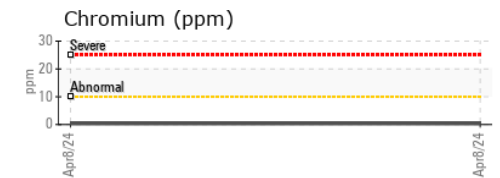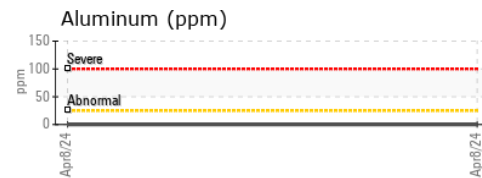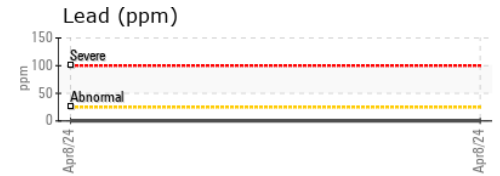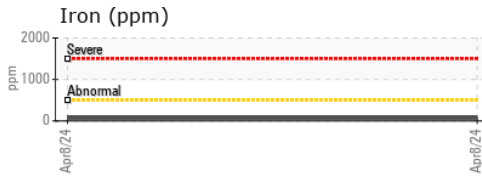

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0005073      **Received** : 19 Apr 2024  
**Lab Number** : 06154609      **Tested** : 22 Apr 2024  
**Unique Number** : 10990032      **Diagnosed** : 22 Apr 2024 - Wes Davis  
**Test Package** : MOB 2

**NEWKIRK ELECTRIC**  
 1875 ROBERTS ST.  
 MUSKEGON, MI  
 US 49442  
 Contact: ERIC KING  
 ewking@newkirk-electric.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)206-6131  
F: (231)724-4090