




# OIL ANALYSIS REPORT

Sample Rating Trend

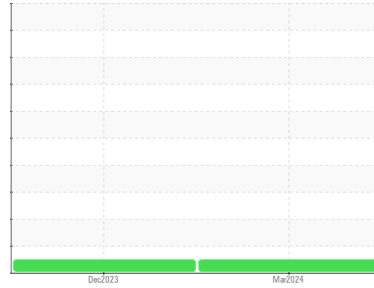

**NORMAL**



Area  
**G VANDEERLAAN**  
 Machine Id  
**PETERBILT 200-129**  
 Component  
**Transmission**  
 Fluid  
**CERTIFIED SYN 50 TRANSMISSION LUBE (5 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TO10003501</b>	TO50002038	---
Sample Date	Client Info			<b>29 Mar 2024</b>	19 Dec 2023	---
Machine Age	hrs	Client Info		<b>3328</b>	2060	---
Oil Age	hrs	Client Info		<b>1268</b>	1369	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>21</b>	20	---
Iron	ppm	ASTM D5185m	>200	<b>13</b>	27	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m		<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>&lt;1</b>	3	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>7</b>	39	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	2	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>26</b>	240	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	10	---
Calcium	ppm	ASTM D5185m		<b>383</b>	3413	---
Phosphorus	ppm	ASTM D5185m		<b>239</b>	943	---
Zinc	ppm	ASTM D5185m		<b>120</b>	1103	---
Sulfur	ppm	ASTM D5185m		<b>6248</b>	7535	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>5</b>	13	---
Sodium	ppm	ASTM D5185m		<b>4</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.11</b>	0.66	---


# OIL ANALYSIS REPORT

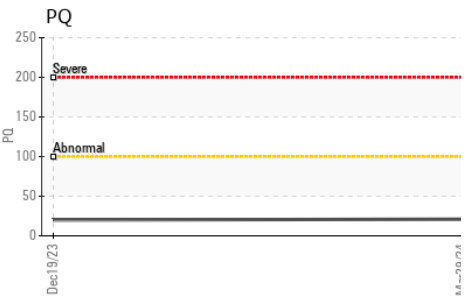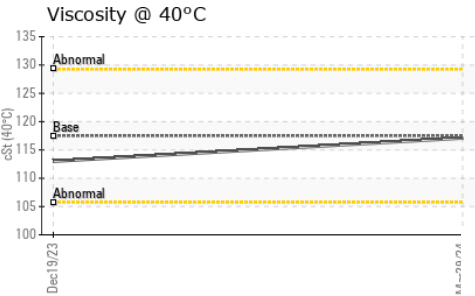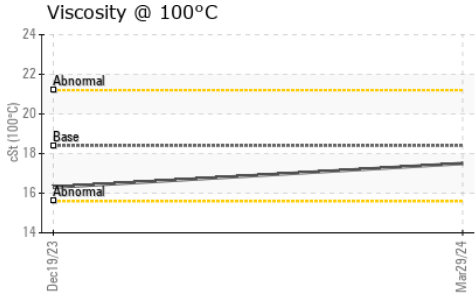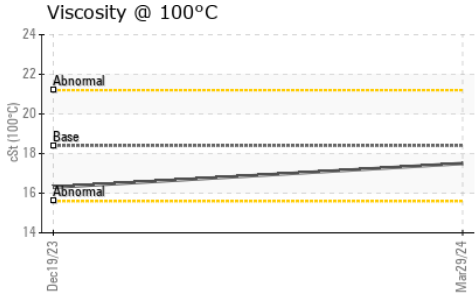






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	117.5	<b>117.1</b>	113
Visc @ 100°C	cSt	ASTM D445	18.4	<b>17.5</b>	16.3
Viscosity Index (VI)	Scale	ASTM D2270	176	<b>164</b>	155

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

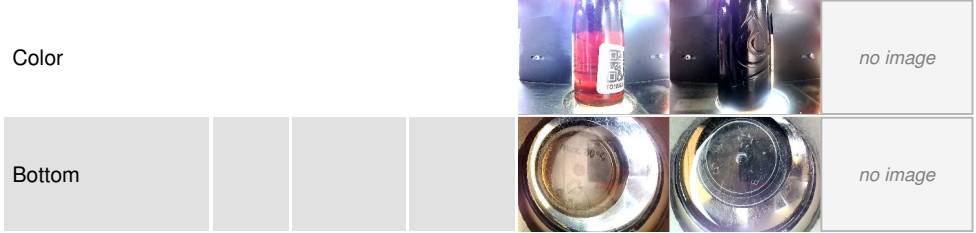

## GRAPHS

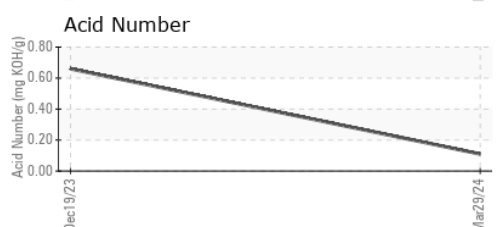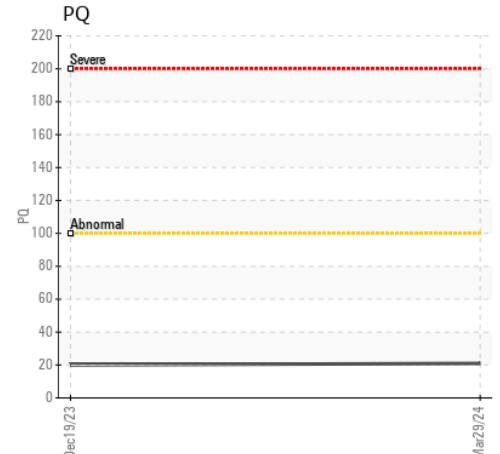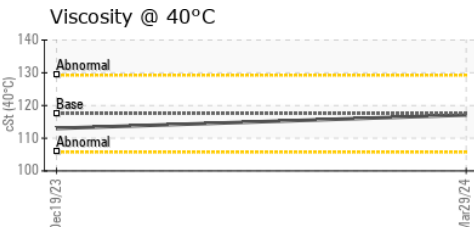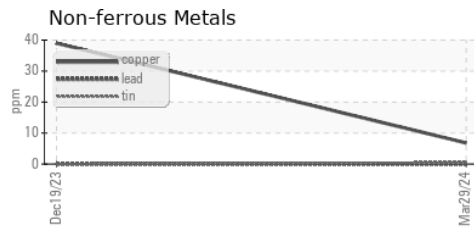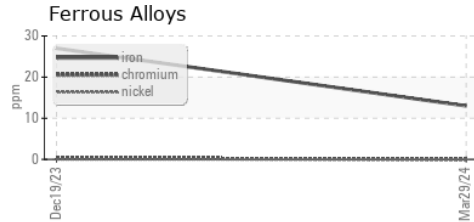

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10003501      **Received** : 19 Apr 2024  
**Lab Number** : **06154774**      **Tested** : 25 Apr 2024  
**Unique Number** : 10990197      **Diagnosed** : 25 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, VI )

**KLX ENERGY SERVICES**  
 5104 ESTES PKWY  
 LONGVIEW, TX  
 US 75603  
 Contact: DUSTIN TREST  
 dustin.trest@klx.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)