

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**KENWORTH 397609**

Component  
**Hydraulic System**

Fluid  
**TULCO LUBSOIL SUPER HYDRAULIC AW 46 (220 GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

Insufficient sample was received to conduct all the routine laboratory tests. There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO10003506</b>	---	---
Sample Date	Client Info		<b>09 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>7204</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>3</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >75	<b>6</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>102</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>5</b>	---	---
Calcium	ppm	ASTM D5185m	<b>52</b>	---	---
Phosphorus	ppm	ASTM D5185m 450	<b>460</b>	---	---
Zinc	ppm	ASTM D5185m 540	<b>495</b>	---	---
Sulfur	ppm	ASTM D5185m 1825	<b>1642</b>	---	---

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Water	%	ASTM D6304 >0.1	<b>NEG</b>	---	---



**VISUAL**

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---

# OIL ANALYSIS REPORT

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

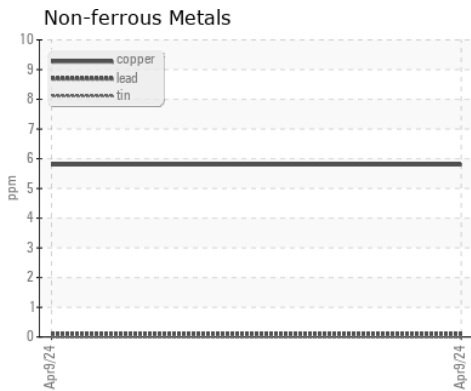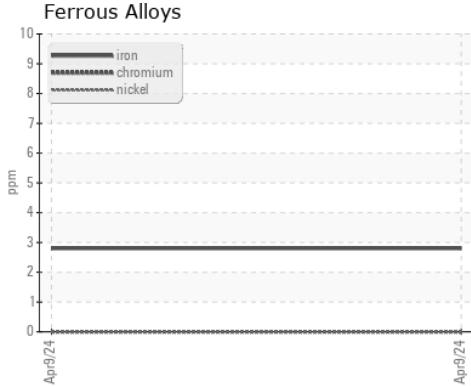

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10003506      **Received** : 19 Apr 2024  
**Lab Number** : **06155017**      **Tested** : 24 Apr 2024  
**Unique Number** : 10990440      **Diagnosed** : 24 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**KLX ENERGY SERVICES**  
 5104 ESTES PKWY  
 LONGVIEW, TX  
 US 75603  
 Contact: DUSTIN TREST  
 dustin.trest@klx.com

T:  
F: