




# OIL ANALYSIS REPORT

## Sample Rating Trend

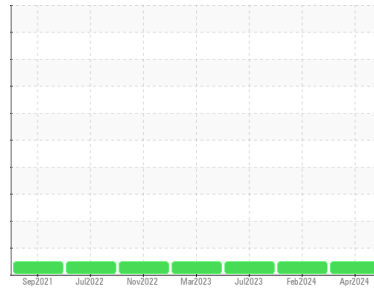

**NORMAL**



Machine Id  
**50-116**  
 Component  
**Diesel Engine**  
 Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0766497</b>	WC0793216	WC0818668
Sample Date	Client Info		<b>12 Apr 2024</b>	12 Feb 2024	14 Jul 2023
Machine Age	hrs	Client Info	<b>4305</b>	3993	3569
Oil Age	hrs	Client Info	<b>4305</b>	3993	239
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	9	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>2</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>88</b>	71	74
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>14</b>	4	34
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 350	<b>624</b>	738	537
Calcium	ppm	ASTM D5185m 1800	<b>1397</b>	1272	1665
Phosphorus	ppm	ASTM D5185m 1000	<b>1118</b>	1054	1059
Zinc	ppm	ASTM D5185m 1100	<b>1202</b>	1233	1251
Sulfur	ppm	ASTM D5185m 3500	<b>4156</b>	3754	4301

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	2	3

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	8.1	7.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	19.2	17.6

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.4</b>	12.7	12.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>8.5</b>	8.2	8.3







# OIL ANALYSIS REPORT

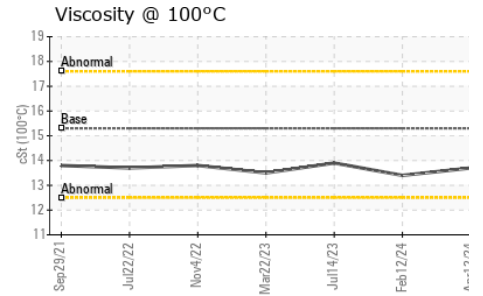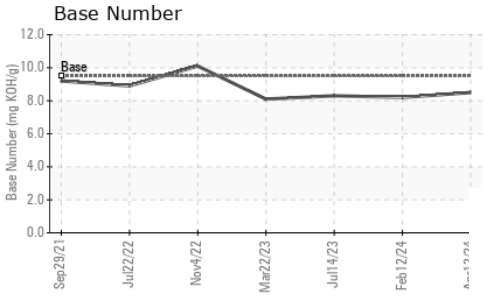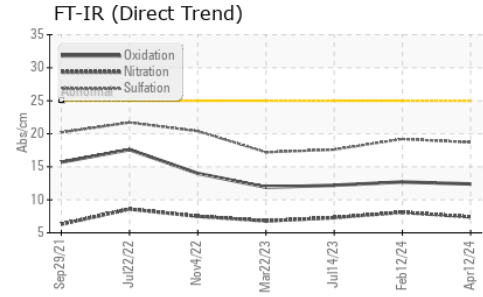

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.3	13.7	13.4

### GRAPHS

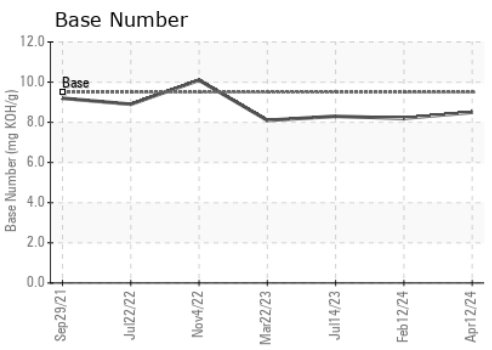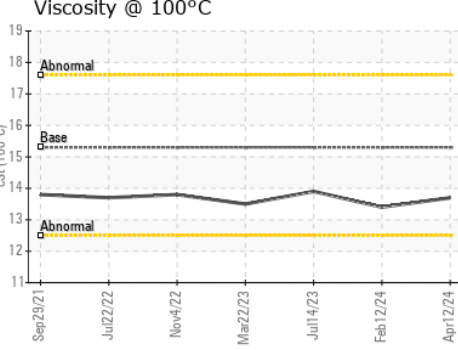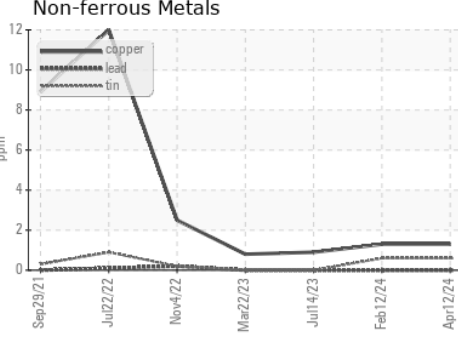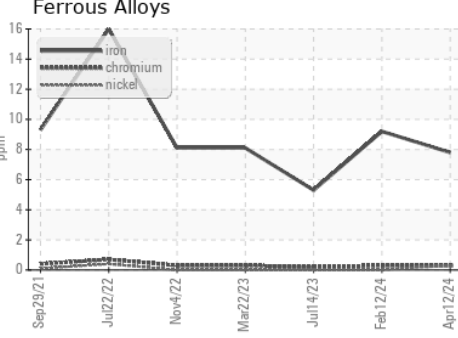

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0766497      **Received** : 19 Apr 2024  
**Lab Number** : 06155113      **Tested** : 22 Apr 2024  
**Unique Number** : 10990536      **Diagnosed** : 22 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: LANCE HARMON  
 lance.harmon@manhattanrb.com  
 T: (918)576-9071  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)