

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

SLUDGE SCREW PRESS 1

Component Gearbox Fluid {not provided} (--- GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0776369		
Sample Date		Client Info		18 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	5		
Chromium	ppm	ASTM D5185m	>15	<1		
Nickel	ppm	ASTM D5185m	>15	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>100	<1		
Copper	ppm	ASTM D5185m	>200	<1		
Tin	ppm	ASTM D5185m	>25	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		5		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		14		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		483		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		3332		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	12		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.2	0.009		
ppm Water	ppm	ASTM D6304	>2000	93		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	0 30499		
Particles >6µm		ASTM D7647	>5000	1084		
Particles >14µm		ASTM D7647	>640	76		
Particles >21µm		ASTM D7647	>160	25		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	e 22/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.05		



OIL ANALYSIS REPORT

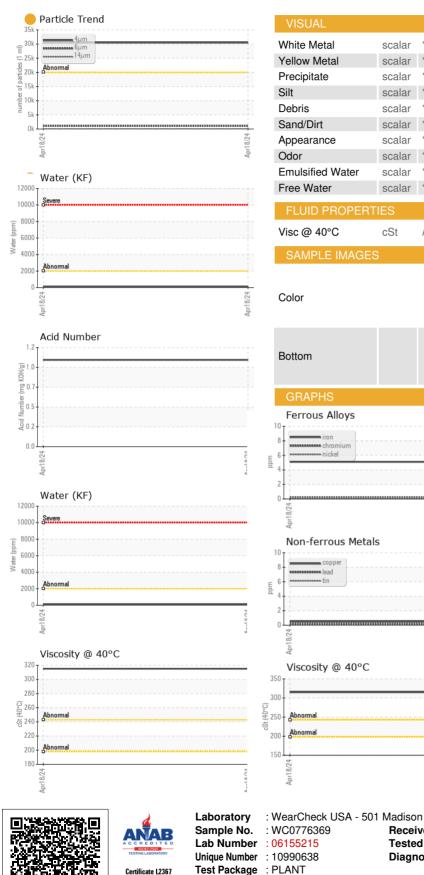

NONE *Visual NONE *Visual NONE NONE NONE *Visua NONE scalar *Visual NONE NONE *Visual NONE NONE NONE NONE *Visual NORML *Visual NORML *Visual NORML NORML *Visual >0.2 NEG scalar *Visual NEG ASTM D445 315 no image no image no image no imade Particle Count 491.5 122,88 30.72 7.680 Apr18/24 (per 1 i 4406 1,920 :1999 Cle 480 120 14 31 214 38L Acid Number (B/HOX 1.0 Ë 0.7 -e 0.5 40.0 Acid Nu Apr18/24 -Apr18/24 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 CASCADES CONTAINERBOARD PACKAGING - BEARPACK PROJECT Received : 19 Apr 2024 10026 OLD RIDGE ROAD : 24 Apr 2024 ASHLAND, VA Diagnosed : 24 Apr 2024 - Jonathan Hester US 23005 Contact: MARC-ANDRE HUBERT To discuss this sample report, contact Customer Service at 1-800-237-1369. marc-andre_hubert@cascades.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CASASH [WUSCAR] 06155215 (Generated: 04/24/2024 13:10:41) Rev: 1

Contact/Location: MARC-ANDRE HUBERT - CASASH

T:

F: