


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

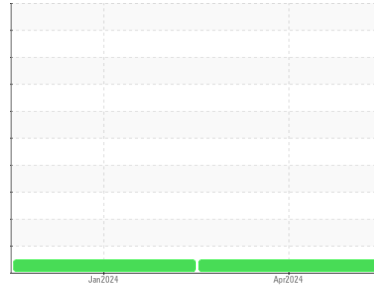

Area  
**[101391]**  
 Machine Id  
**1GR-Y301A**  
 Component  
**Gearbox**  
 Fluid  
**OPTIGEAR 1100/220 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO60002450</b>	TO60000904	---
Sample Date	Client Info		<b>10 Apr 2024</b>	09 Jan 2024	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>18</b>	11	---
Iron	ppm	ASTM D5185m >200	<b>4</b>	0	---
Chromium	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>17</b>	6	---
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>7</b>	5	---
Molybdenum	ppm	ASTM D5185m	<b>2193</b>	1949	---
Manganese	ppm	ASTM D5185m	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	<b>0</b>	0	---
Calcium	ppm	ASTM D5185m	<b>111</b>	92	---
Phosphorus	ppm	ASTM D5185m	<b>3012</b>	2975	---
Zinc	ppm	ASTM D5185m	<b>1148</b>	1165	---
Sulfur	ppm	ASTM D5185m	<b>5717</b>	5226	---





## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>38</b>	28	---
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	---





## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---


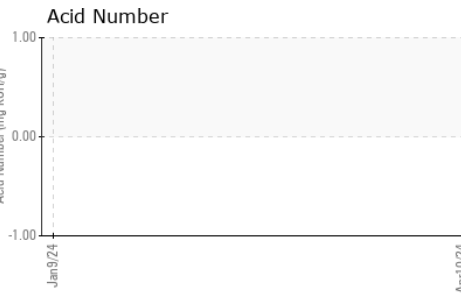
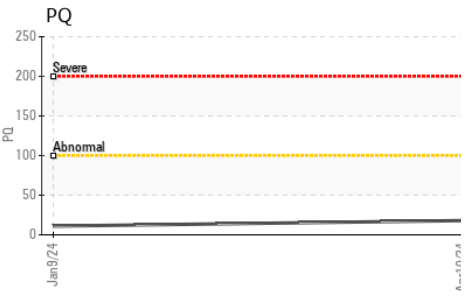
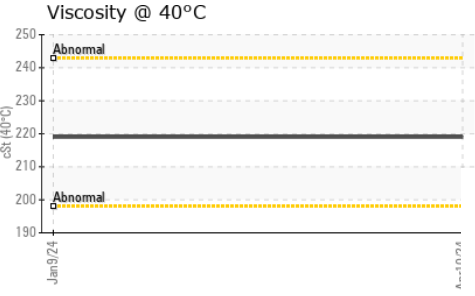
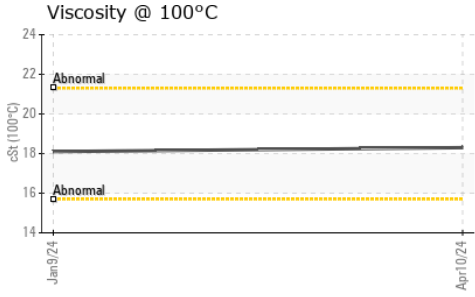
# OIL ANALYSIS REPORT



FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>219</b>	219	---
Visc @ 100°C	cSt	ASTM D445	<b>18.3</b>	18.1	---
Viscosity Index (VI)	Scale	ASTM D2270	<b>91</b>	90	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

## GRAPHS

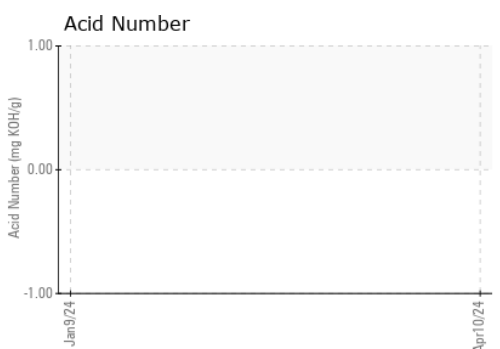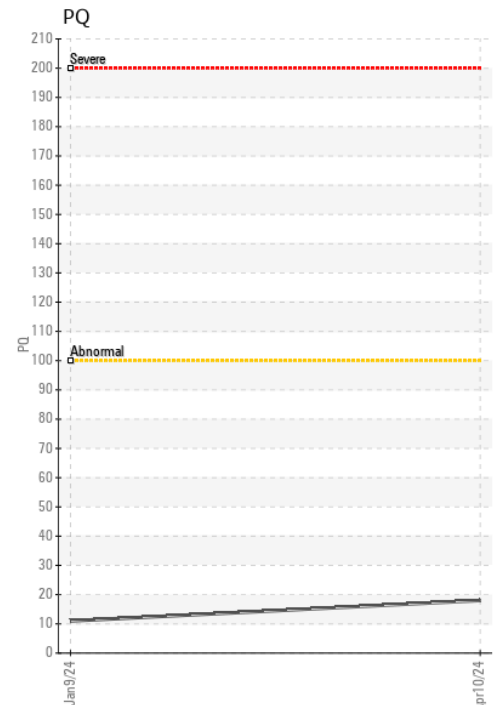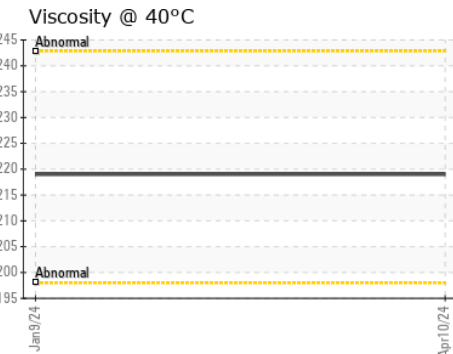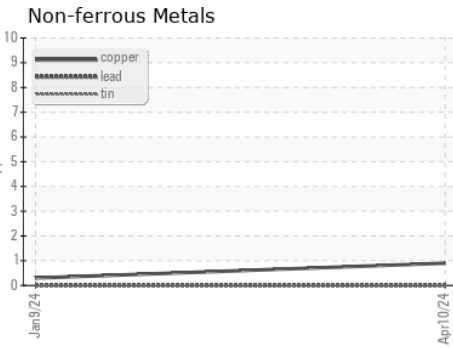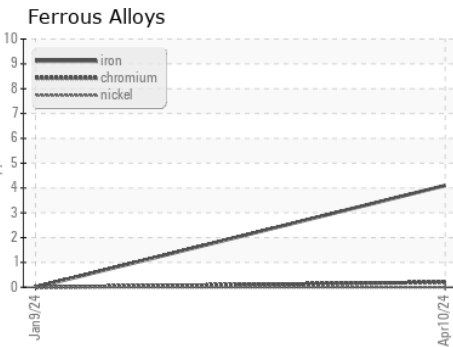

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO60002450      **Received** : 19 Apr 2024  
**Lab Number** : **06155291**      **Tested** : 24 Apr 2024  
**Unique Number** : 10990714      **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**YUPO**  
 800 YUPO CT  
 CHESAPEAKE, VA  
 US 23320  
 Contact: KEVIN RAND  
 KRAND@YUPO.COM

T:  
F: