
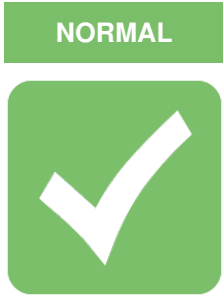


# OIL ANALYSIS REPORT

Sample Rating Trend

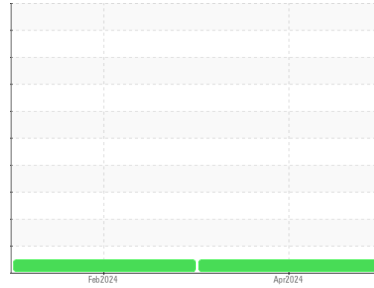

Machine Id  
**1MR-Y303-2**  
Component  
**Center Gearbox**  
Fluid  
**OPTIGEAR 800/460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TO60002448</b>	TO60002022	---
Sample Date	Client Info			<b>10 Apr 2024</b>	12 Feb 2024	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>37</b>	33	---
Iron	ppm	ASTM D5185m	>200	<b>2</b>	3	---
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>16</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>5</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>1803</b>	2045	---
Zinc	ppm	ASTM D5185m		<b>10</b>	0	---
Sulfur	ppm	ASTM D5185m		<b>0</b>	629	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>21</b>	17	---
Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---






# OIL ANALYSIS REPORT

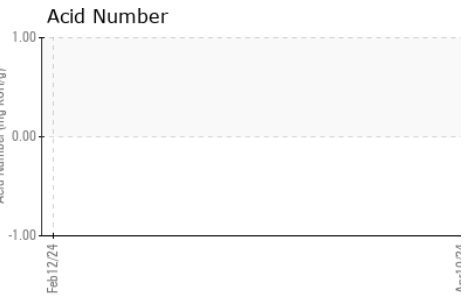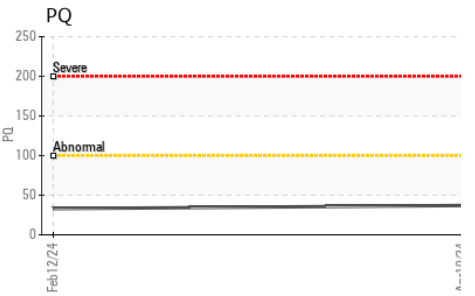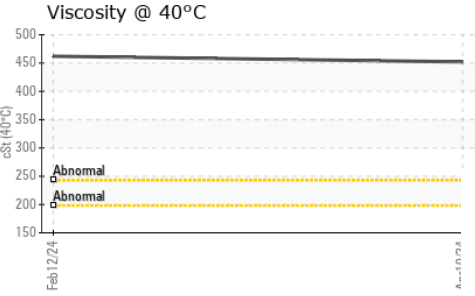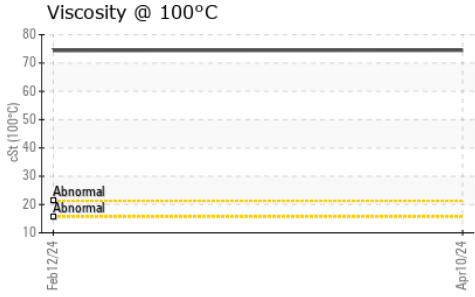

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>452</b>	462	---
Visc @ 100°C	cSt	ASTM D445	<b>74.5</b>	74.43	---
Viscosity Index (VI)	Scale	ASTM D2270	<b>245</b>	242	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

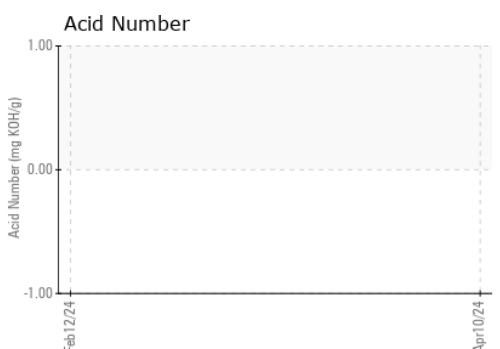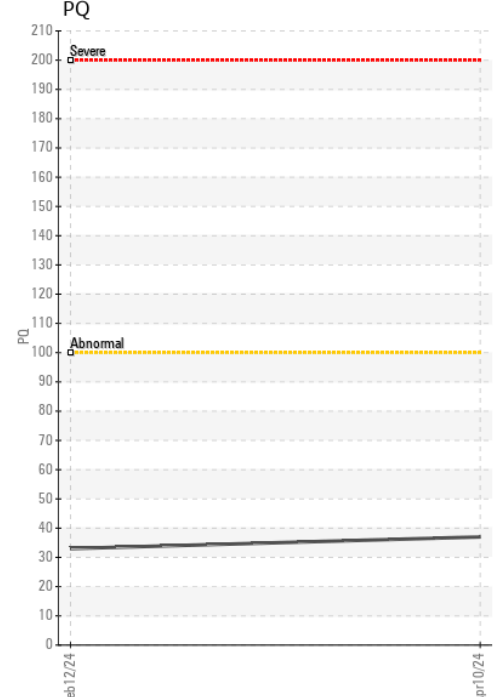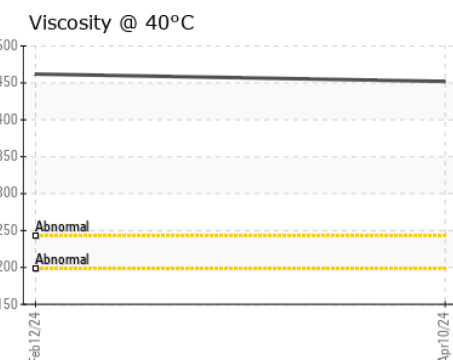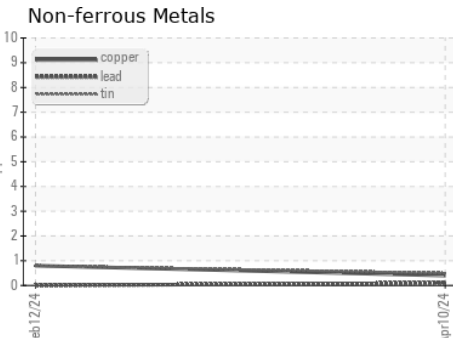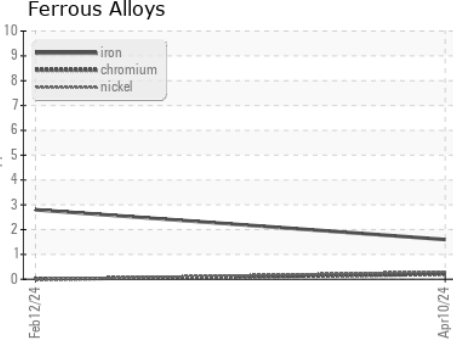

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO60002448      **Received** : 19 Apr 2024  
**Lab Number** : **06155294**      **Tested** : 24 Apr 2024  
**Unique Number** : 10990717      **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**YUPO**  
 800 YUPO CT  
 CHESAPEAKE, VA  
 US 23320  
 Contact: KEVIN RAND  
 KRAND@YUPO.COM

T:  
F: