

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

CLEAN BURN YARDST-2

Diesel Engine Fluid DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0875424		
Sample Date		Client Info		17 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	19		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	8		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	1		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	40		
Barium	ppm	ASTM D5185m	10	0		
Molybdenum	ppm	ASTM D5185m	100	72		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	450	197		
Calcium	ppm	ASTM D5185m	3000	1913		
Phosphorus	ppm	ASTM D5185m	1150	852		
Zinc	ppm	ASTM D5185m	1350	1058		
Sulfur	ppm	ASTM D5185m	4250	3759		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10		
Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>25 >158	10 2		
Sodium	ppm	ASTM D5185m	>158	2		
Sodium Potassium	ppm	ASTM D5185m ASTM D5185m	>158 >20	2 0		
Sodium Potassium INFRA-RED	ppm ppm	ASTM D5185m ASTM D5185m method	>158 >20 limit/base	2 0 current	 history1	 history2
Sodium Potassium INFRA-RED Soot %	ppm ppm %	ASTM D5185m ASTM D5185m method *ASTM D7844	>158 >20 limit/base >3	2 0 current 0.3	 history1	 history2
Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m method *ASTM D7844 *ASTM D7624	>158 >20 limit/base >3 >20	2 0 current 0.3 8.9	 history1 	 history2
Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m method *ASTM D7844 *ASTM D7624 *ASTM D7415	>158 >20 limit/base >3 >20 >30	2 0 current 0.3 8.9 18.5	 history1 	 history2
Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm % Abs/cm Abs/.1mm TION	ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7624 *ASTM D7415 method	>158 >20 limit/base >3 >20 >30 limit/base	2 0 current 0.3 8.9 18.5 current	 history1 history1	 history2 history2



3

30

2!

Abs/cm

10

14

0.212.0 0.0 KOH/g) 0.8 Base Number (mg KOH/g) 0.9 CON KOH/g)

2.0

0.0

18

16

cSt (100°C) Ba


Apr17/24

nrl

Apr17/24

Base

OIL ANALYSIS REPORT

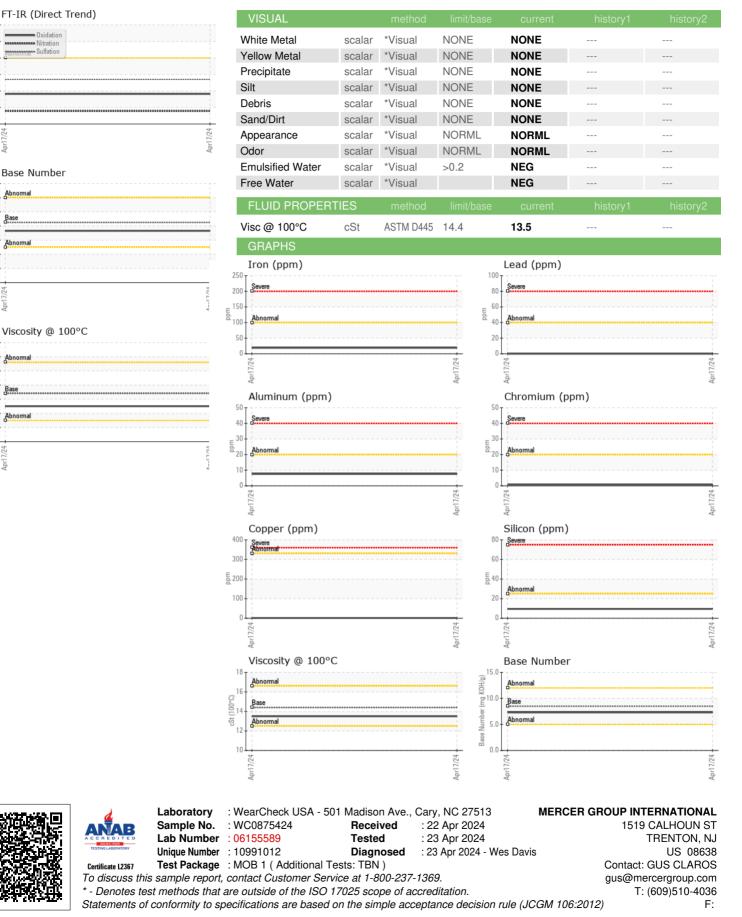

Contact/Location: GUS CLAROS - MERTREWC