



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area

COLORADO/443/EG - TRUCK-ON-HWY-HEAVY DUTY

Machine Id

07.50 [COLORADO^443^EG - TRUCK-ON-HWY-HEAVY DUTY]

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0864429 | --- | --- |
| Sample Date | Client Info | | 05 Apr 2024 | --- | --- |
| Machine Age | mls | Client Info | 33449 | --- | --- |
| Oil Age | mls | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | --- | --- |
| Water | WC Method | >0.2 | NEG | --- | --- |
| Glycol | WC Method | | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-------------|---------|--------------|----------|
| Iron | ppm | ASTM D5185m | >100 | 25 | --- |
| Chromium | ppm | ASTM D5185m | >20 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 26 | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | --- |
| Copper | ppm | ASTM D5185m | >330 | 4 | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|---------|-------------|----------|
| Boron | ppm | ASTM D5185m | 250 | 42 | --- |
| Barium | ppm | ASTM D5185m | 10 | 1 | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 40 | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 496 | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 1592 | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 805 | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 940 | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 2936 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------|---------|-----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 6 | --- |
| Sodium | ppm | ASTM D5185m | >216 | 6 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 58 | --- |

INFRA-RED




| | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|---------|-------------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.4 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.4 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.1 | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|---------|-------------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 23.2 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 8.5 | --- |







OIL ANALYSIS REPORT

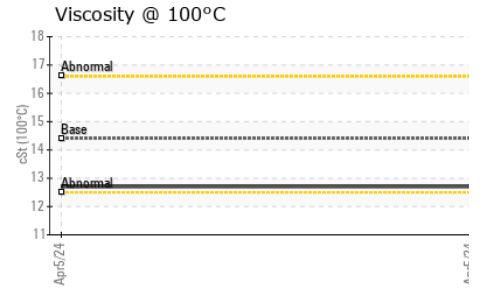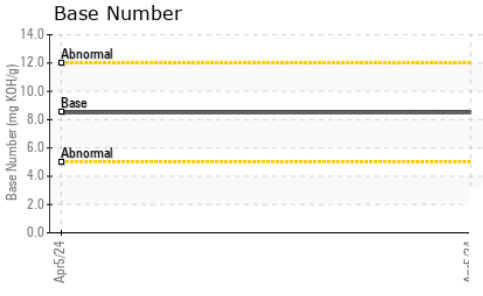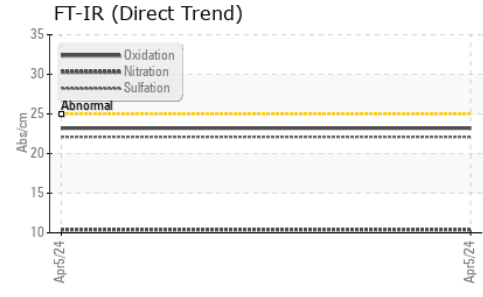

| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 12.7 | --- | --- |

GRAPHS

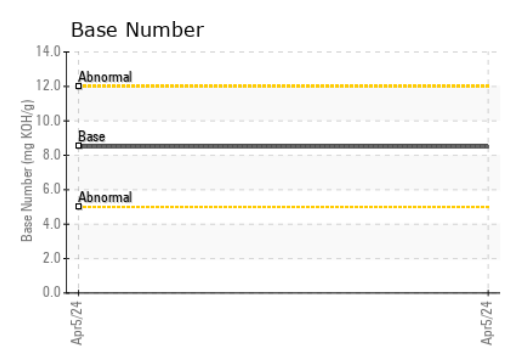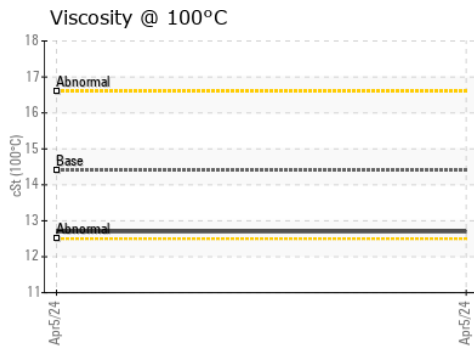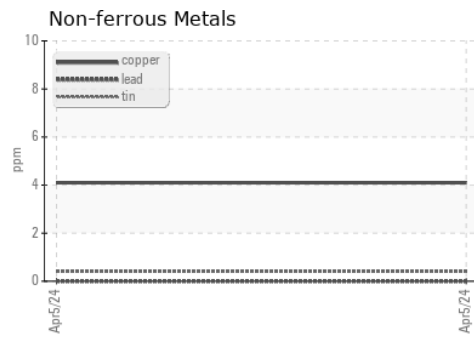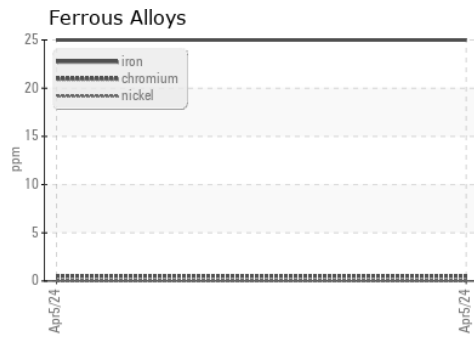

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864429 **Received** : 22 Apr 2024
Lab Number : 06155632 **Tested** : 23 Apr 2024
Unique Number : 10991055 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: BILL ORCUTT
 william.orcutt@wildcat.net
 T: (719)499-6303
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)