



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
BLUE STAR PEAK CH
 Component
Natural Gas Engine
 Fluid
NAPA 10W30 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 Metal levels are typical for a new component breaking in.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0901808	---	---
Sample Date	Client Info		18 Apr 2024	---	---
Machine Age	hrs	Client Info	246	---	---
Oil Age	hrs	Client Info	43	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	27	---	---
Chromium	ppm	ASTM D5185m >4	1	---	---
Nickel	ppm	ASTM D5185m >2	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >9	2	---	---
Lead	ppm	ASTM D5185m >30	4	---	---
Copper	ppm	ASTM D5185m >35	7	---	---
Tin	ppm	ASTM D5185m >4	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	126	---	---
Barium	ppm	ASTM D5185m	2	---	---
Molybdenum	ppm	ASTM D5185m	59	---	---
Manganese	ppm	ASTM D5185m	3	---	---
Magnesium	ppm	ASTM D5185m	681	---	---
Calcium	ppm	ASTM D5185m	1032	---	---
Phosphorus	ppm	ASTM D5185m	692	---	---
Zinc	ppm	ASTM D5185m	762	---	---
Sulfur	ppm	ASTM D5185m	3013	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	70	---	---
Sodium	ppm	ASTM D5185m	13	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	---	---
Nitration	Abs/cm	*ASTM D7624 >20	7.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.3	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	10.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.2	---	---







OIL ANALYSIS REPORT

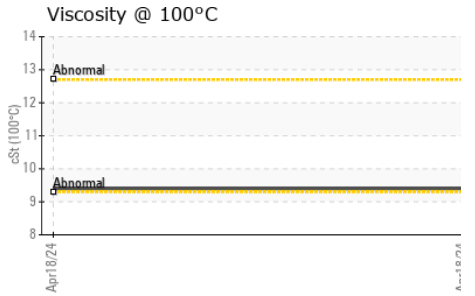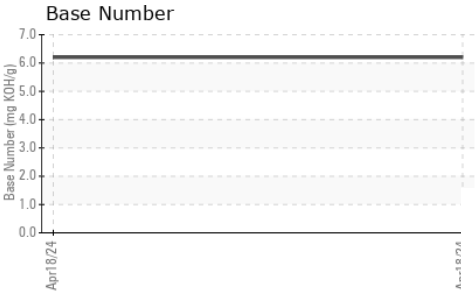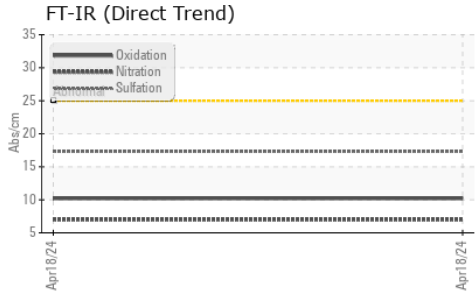

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	9.4	---	---

GRAPHS

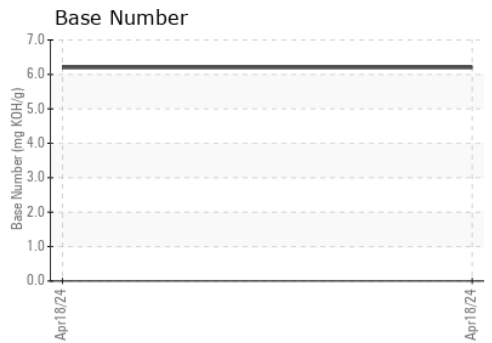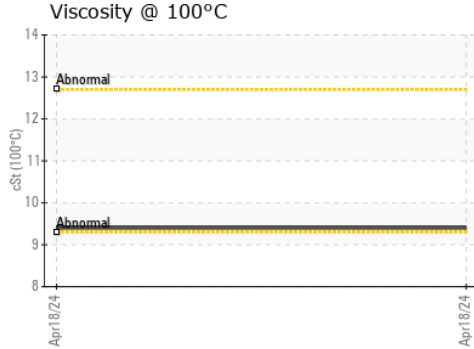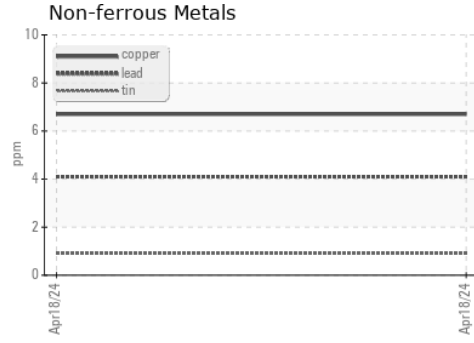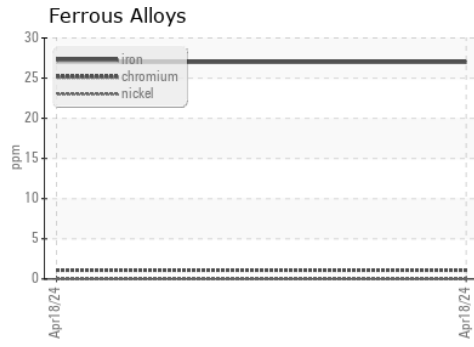

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0901808 **Received** : 22 Apr 2024
Lab Number : 06155669 **Tested** : 23 Apr 2024
Unique Number : 10991092 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : FLEET

CAROLINA POWER SOLUTION
 445 W GROVER ST
 SHELBY, NC
 US 28150
 Contact: PAIGE
 paige@carolinapowersolutions.com
 T: (704)481-0782
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)