

OIL ANALYSIS REPORT



Machine Id **35.107** [] Component Hydraulic System Fluid MOBIL MOBILTRANS AST 30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------|-----------------|-------------|
| Sample Number | | Client Info | | WC0864397 | | |
| Sample Date | | Client Info | | 10 Apr 2024 | | |
| Machine Age | hrs | Client Info | | 732 | | |
| Oil Age | hrs | Client Info | | 732 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 7 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | 1 | | |
| Copper | ppm | ASTM D5185m | >75 | 8 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 1 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 3 | | |
| Calcium | ppm | ASTM D5185m | | 165 | | |
| Phosphorus | ppm | ASTM D5185m | | 629 | | |
| Zinc | ppm | ASTM D5185m | | 818 | | |
| Sulfur | ppm | ASTM D5185m | | 1944 | | |
| CONTAMINANTS | \$ | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >20 | 2 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 16462 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 644 | | |
| Particles >14µm | | ASTM D7647 | >640 | 28 | | |
| Particles >21µm | | ASTM D7647 | >160 | 8 | | |
| Particles >38µm | | ASTM D7647 | >40 | 1 | | |
| Particles >71µm | | ASTM D7647 | >10 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/18/16 | 21/17/12 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.90 | | |
| 2:41:20) Rev: 1 | | | | | Submitted By: S | SHAWN SOUTH |

Report Id: SHEWIC [WUSCAR] 06155837 (Generated: 04/24/2024 12:41:20) Rev: 1

Submitted By: SHAWN SOUTH Page 1 of 2



OIL ANALYSIS REPORT

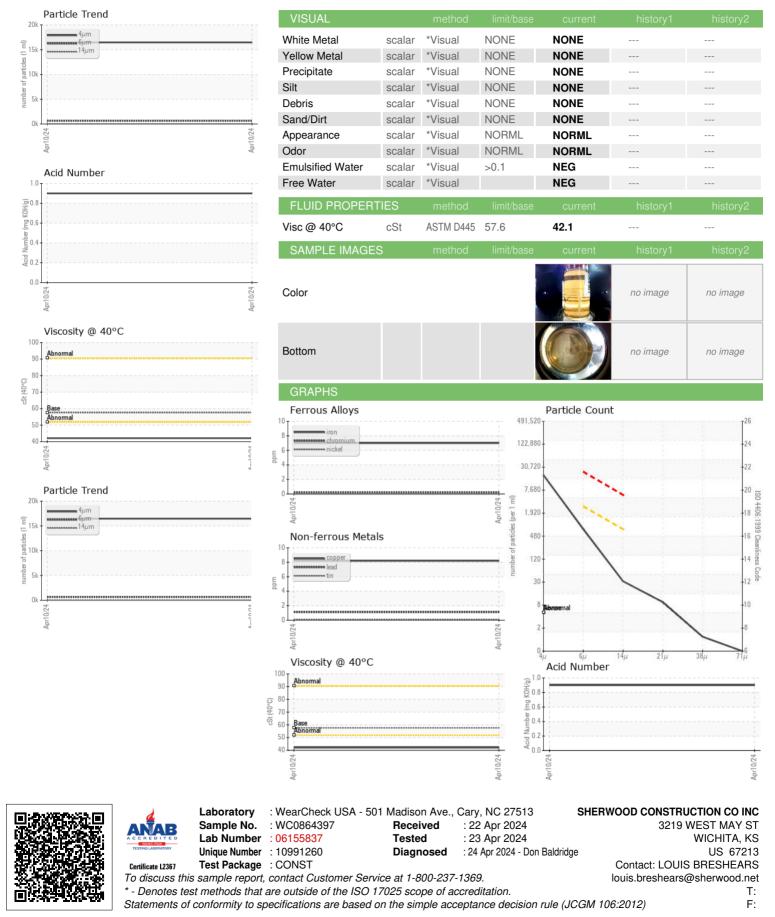

Submitted By: SHAWN SOUTH Page 2 of 2