

OIL ANALYSIS REPORT

Area **MP-105** B52524 - PUMP VACUUM BUSCH RA0630 HAM LINE 1 (S/N U093504073) **Bottom Pump**

PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend



NORMAL

SAMPLE INFORMATION method WC0907988 WC0894945 WC0880549 Sample Number **Client Info** 08 Mar 2024 29 Dec 2023 Sample Date Client Info 16 Apr 2024 Client Info 0 0 0 Machine Age vrs Oil Age yrs Client Info 0 0 0 Oil Changed N/A N/A N/A **Client Info** Sample Status NORMAL NORMAL NORMAL CONTAMINATION NEG NEG NEG Water WC Method >.1 WEAR METALS ppm ASTM D5185m >90 11 11 9 Iron Chromium ASTM D5185m >5 0 <1 ppm <1 Nickel 0 ppm ASTM D5185m >5 0 <1 Titanium ASTM D5185m >3 0 ppm <1 <1 0 0 Silver ASTM D5185m >3 0 ppm Aluminum ppm ASTM D5185m >7 0 0 2 ASTM D5185m >12 0 0 Lead <1 ppm >30 1 1 Copper ppm ASTM D5185m 1 >9 Tin ASTM D5185m 0 <1 ppm <1 Vanadium 0 0 ppm ASTM D5185m <1 0 Cadmium 0 ppm ASTM D5185m <1 0 0 0 Boron ASTM D5185m ppm 0 Barium ppm ASTM D5185m 0 7 Molvbdenum ASTM D5185m 0 <1 <1 ppm 0 <1 <1 Manganese ppm ASTM D5185m 0 Magnesium ASTM D5185m <1 <1 ppm 0 Calcium ASTM D5185m ppm <1 <1 Phosphorus ASTM D5185m 482 522 565 ppm Zinc ppm ASTM D5185m 0 0 0 Sulfur ASTM D5185m 1521 1481 1476 ppm CONTAMINANTS 0 Silicon ppm ASTM D5185m >60 <1 <1 Sodium ASTM D5185m 0 0 ppm <1 Potassium ASTM D5185m >20 0 0 ppm <1 FLUID CLEANLINESS >10000 Particles >4µm ASTM D7647 1786 3432 613 Particles >6µm ASTM D7647 >2500 367 917 181 >320 34 81 21 Particles >14µm ASTM D7647 Particles >21µm ASTM D7647 >80 9 15 5 0 0 Particles >38µm ASTM D7647 >20 0 Particles >71µm ASTM D7647 >4 0 0 0 **Oil Cleanliness** 18/16/12 19/17/14 16/15/12 ISO 4406 (c) >20/18/15 FLUID DEGRADATION

0.5

0.24

Acid Number (AN) mg KOH/g ASTM D8045


Report Id: HORAUS [WUSCAR] 06155841 (Generated: 04/24/2024 12:40:14) Rev: 1


0.22 Contact/Location: RYAN LOWE - HORAUS


0.18




OIL ANALYSIS REPORT

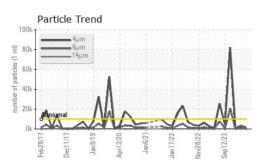

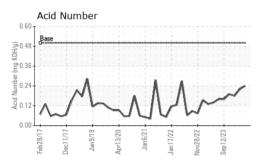


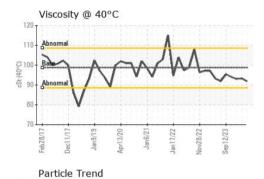



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.7	91.9	93.3	93.0
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						



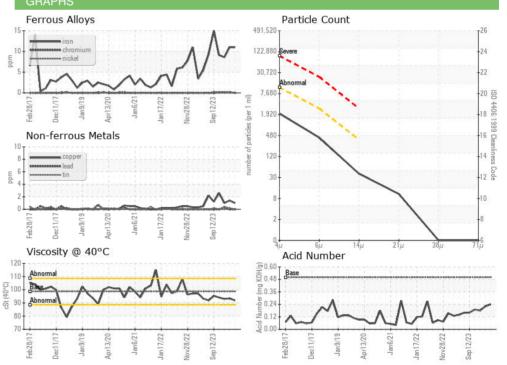

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **HORMEL FOODS - AUSTIN** Sample No. : WC0907988 Received : 22 Apr 2024 1101 NORTH MAIN ST Lab Number : 06155841 Tested : 23 Apr 2024 AUSTIN, MN Unique Number : 10991264 Diagnosed : 24 Apr 2024 - Don Baldridge US 55912 Test Package : IND 2 (Additional Tests: PrtCount) Contact: RYAN LOWE Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. rslowe@hormel.com T: (507)437-5674 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (507)437-9805

Report Id: HORAUS [WUSCAR] 06155841 (Generated: 04/24/2024 12:40:14) Rev: 1

Contact/Location: RYAN LOWE - HORAUS

Page 2 of 2