

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



Machine Id

# TMC PRESS 9 - MATCHLESS PLASTIC

**Hydraulic System** 

**AW HYDRAULIC OIL ISO 46 (--- GAL)** 

### **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0005346		
Sample Date		Client Info		21 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	4		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25			
Calcium			23	1		
	ppm	ASTM D5185m		1 74		
Phosphorus	ppm	ASTM D5185m ASTM D5185m		-		
Phosphorus Zinc			200 300	74		
	ppm	ASTM D5185m	200 300 370	74 253		
Zinc	ppm ppm	ASTM D5185m ASTM D5185m	200 300 370	74 253 321		
Zinc Sulfur	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	200 300 370 2500	74 253 321 1575		
Zinc Sulfur CONTAMINANTS	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method	200 300 370 2500 limit/base	74 253 321 1575 current	   history1	history2
Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	200 300 370 2500 limit/base >15	74 253 321 1575 current	  history1	  history2
Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	200 300 370 2500 limit/base >15	74 253 321 1575 current 1 <1	  history1	history2
Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	200 300 370 2500 limit/base >15 >20 limit/base >5000	74 253 321 1575 current 1 <1 0 current  25868	  history1 	history2
Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	200 300 370 2500 limit/base >15 >20 limit/base >5000	74 253 321 1575 current 1 <1 0 current	  history1   history1	history2 history2
Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	200 300 370 2500 limit/base >15 >20 limit/base >5000 >1300 >160	74 253 321 1575  current 1 <1 0  current  25868  9908  1326	history1 history1 history1	history2 history2 history2
Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	200 300 370 2500 limit/base >15 >20 limit/base >5000 >1300 >160	74 253 321 1575  current 1 <1 0  current  25868  9908  1326  441	history1 history1	history2 history2
Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	200 300 370 2500 limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10	74 253 321 1575  current  1 <1 0  current  25868  9908  1326  441  31	history1 history1 history1	history2 history2 history2
Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	200 300 370 2500 limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10 >3	74 253 321 1575  current 1 <1 0  current  25868  9908  1326  441	history1 history1	history2 history2

Acid Number (AN)

**FLUID DEGRADATION** 

mg KOH/g ASTM D8045 0.57

method

limit/base

current


Contact/Location: JERRY PETTIS - MATPLY

history1

history2



## **OIL ANALYSIS REPORT**

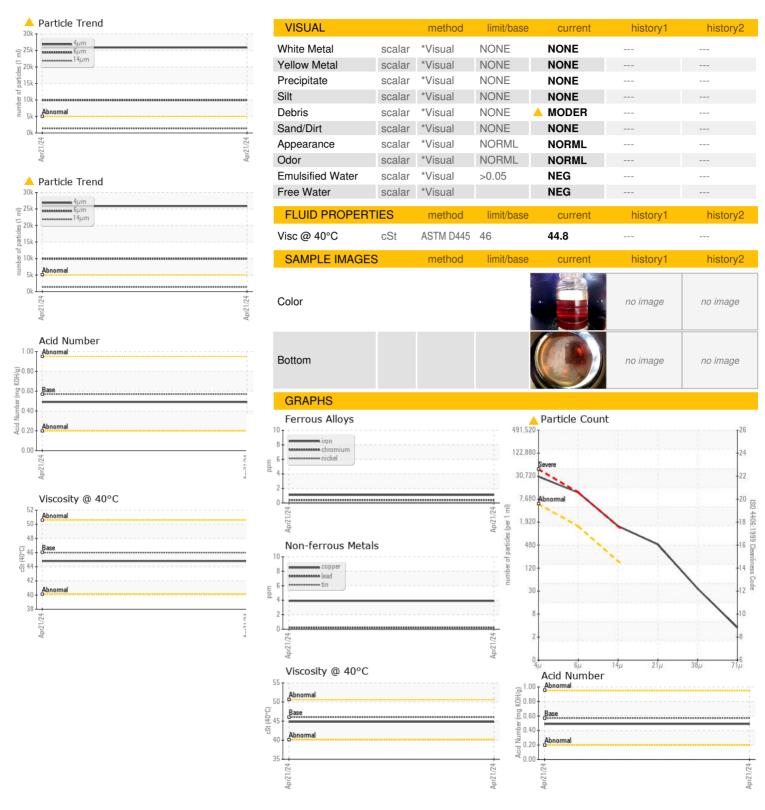



Certificate 12367

Sample No.

Lab Number : 06155875 Unique Number: 10991298

Test Package : MOB 2

: PTK0005346

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 22 Apr 2024 **Tested** : 23 Apr 2024

Diagnosed : 24 Apr 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: JERRY PETTIS

jerry@matchlessplastics.com T:

**MATCHLESS PLASTICS** 

13225 INDUSTRIAL BLVD

PLYMOUTH, MN

US 55441

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MATPLY [WUSCAR] 06155875 (Generated: 04/24/2024 13:07:49) Rev: 1

Contact/Location: JERRY PETTIS - MATPLY

F: