

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id **TKS PRESS 1 UNIT 8**

Component Hydraulic System

TULCO LUBSOIL SUPER HYDRAULIC AW 68 (50 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO50000869	TO5000397	TO5010071
Sample Date		Client Info		17 Apr 2024	23 Jul 2019	14 May 2018
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	18	18	15
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	2	4	5
Copper	ppm	ASTM D5185m	>75	13	14	12
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	<1	<1
ADDITIVES	1º P	method	limit/base	current	history1	history2
			IIIIIVDase			
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		0	<1	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		3	6	8
Calcium	ppm	ASTM D5185m	105	3	4	6
Phosphorus	ppm	ASTM D5185m	425	158	192	222
Zinc	ppm	ASTM D5185m	500	165	181	221
o //						
Sulfur	ppm	ASTM D5185m	1900	5531	5362	2732
Sulfur CONTAMINANTS						
		ASTM D5185m	1900 limit/base	5531	5362	2732
CONTAMINANTS Silicon	;	ASTM D5185m method	1900 limit/base	5531 current	5362 history1	2732 history2
CONTAMINANTS Silicon	ppm	ASTM D5185m method ASTM D5185m	1900 limit/base >20	5531 current 17	5362 <mark>history1</mark> 19	2732 history2 23
CONTAMINANTS Silicon Sodium Potassium	ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	1900 limit/base >20 >20	5531 current 17 <1	5362 history1 19 2	2732 history2 23 2
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	1900 limit/base >20 >20	5531 current 17 <1 <1	5362 history1 19 2 1	2732 history2 23 2 <1
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	1900 limit/base >20 >20 >20	5531 current 17 <1 <1 <1 0.00	5362 history1 19 2 1 0.005	2732 history2 23 2 <1 0.003
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	1900 limit/base >20 >20 >0.1 >1000	5531 current 17 <1 <1 0.00 0	5362 history1 19 2 1 0.005 50	2732 history2 23 2 <1 0.003 30
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	1900 limit/base >20 >20 >0.1 >1000 limit/base	5531 current 17 <1 <1 0.00 0 current	5362 history1 19 2 1 0.005 50 history1	2732 history2 23 2 <1 0.003 30 history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000	5531 current 17 <1 <1 <1 0.00 0 current ▲ 14163	5362 history1 19 2 1 0.005 50 history1 ▲ 28908	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326
CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000 >1300	5531 current 17 <1 <1 0.00 0 current ▲ 14163 474	5362 history1 19 2 1 0.005 50 history1 ▲ 28908 ● 1932	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326 ■ 1335
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000 >1300 >160	5531 current 17 <1 <1 0.00 0 current ▲ 14163 474 7	5362 history1 19 2 1 0.005 50 history1 ▲ 28908 ● 1932 16	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326 ■ 1335 40
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000 >1300 >160 >40	5531 current 17 <1 <1 0.00 0 current ▲ 14163 474 7 3	5362 history1 19 2 1 0.005 50 history1 ▲ 28908 1932 16 2	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326 ● 1335 40 20
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000 >1300 >160 >40 >10	5531 current 17 <1 <1 0.00 0 current ▲ 14163 474 7 3 0	5362 history1 19 2 1 0.005 50 history1 ▲ 28908 1932 16 2 0	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326 ■ 1335 40 20 5
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1900 limit/base >20 >20 >0.1 >1000 limit/base >5000 >1300 >160 >40 >10 >3	5531 current 17 <1 <1 0.00 0 current ▲ 14163 474 7 3 0 0 0	5362 history1 19 2 1 0.005 50 history1 ▲ 28908 1932 16 2 0 0 0	2732 history2 23 2 <1 0.003 30 history2 ▲ 16326 ● 1335 40 20 5 1

Report Id: DALPLATO [WUSCAR] 06155908 (Generated: 04/24/2024 17:56:07) Rev: 1

Contact/Location: KENNY CLARK - DALPLATO




OIL ANALYSIS REPORT

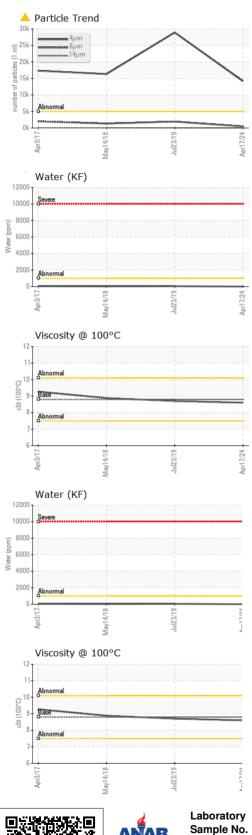

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES						
FLUID PROPERT	IES	method	limit/base	current	history1	history2
FLUID PROPERT Visc @ 40°C	<mark>IES</mark> cSt	method ASTM D445	limit/base 67.4	current 66.5	history1 66.2	history2 66.6
			67.4			
Visc @ 40°C	cSt	ASTM D445	67.4	66.5	66.2	66.6
Visc @ 40°C Visc @ 100°C	cSt cSt Scale	ASTM D445 ASTM D445	67.4 8.8	66.5 8.6	66.2 8.7	66.6 8.88
Visc @ 40°C Visc @ 100°C Viscosity Index (VI)	cSt cSt Scale	ASTM D445 ASTM D445 ASTM D2270	67.4 8.8 102	66.5 8.6 99	66.2 8.7 103	66.6 8.88 106

Bottom

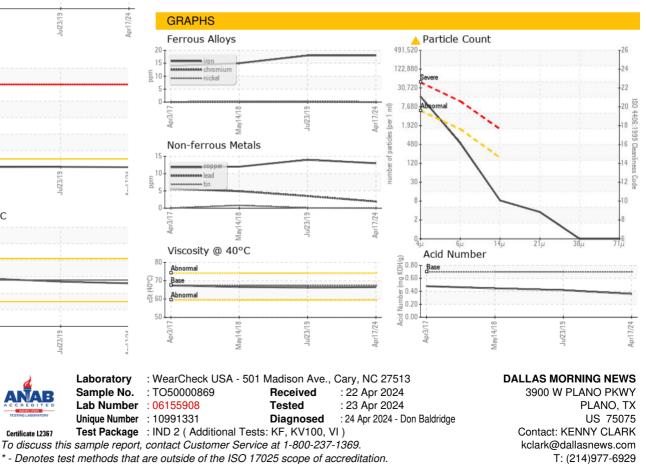

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: KENNY CLARK - DALPLATO

F: (214)977-6888