

# **OIL ANALYSIS REPORT**

**PRODUCTION WIFAG FOLDER** 

Hydraulic System

TULCO LUBSOIL SUPER HYDRAULIC AW

# Sample Rating Trend



# DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

100 (90 GAL)			Apr2022	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO50000807	TO5000701	
Sample Date		Client Info		17 Apr 2024	20 Apr 2022	
Machine Age	mths	Client Info		8	0	
Oil Age	mths	Client Info		0	3	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		0	<1	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>75	<1	2	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		49	4	
Calcium	ppm	ASTM D5185m		39	5	
Phosphorus	ppm	ASTM D5185m	380	294	361	
Zinc	ppm	ASTM D5185m	490	390	472	
Sulfur	ppm	ASTM D5185m	2150	1835	1263	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	2	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
Water	%	ASTM D6304	>0.1	0.00	0.005	
ppm Water	ppm	ASTM D6304	>1000	0	52.5	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3011	450	
Particles >6µm		ASTM D7647	>1300	126	85	
Particles >14µm		ASTM D7647	>160	10	8	
Particles >21µm		ASTM D7647	>40	4	2	
Particles >38µm		ASTM D7647	>10	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/14/10	16/14/10	
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.6	0.31	0.40	



# **OIL ANALYSIS REPORT**

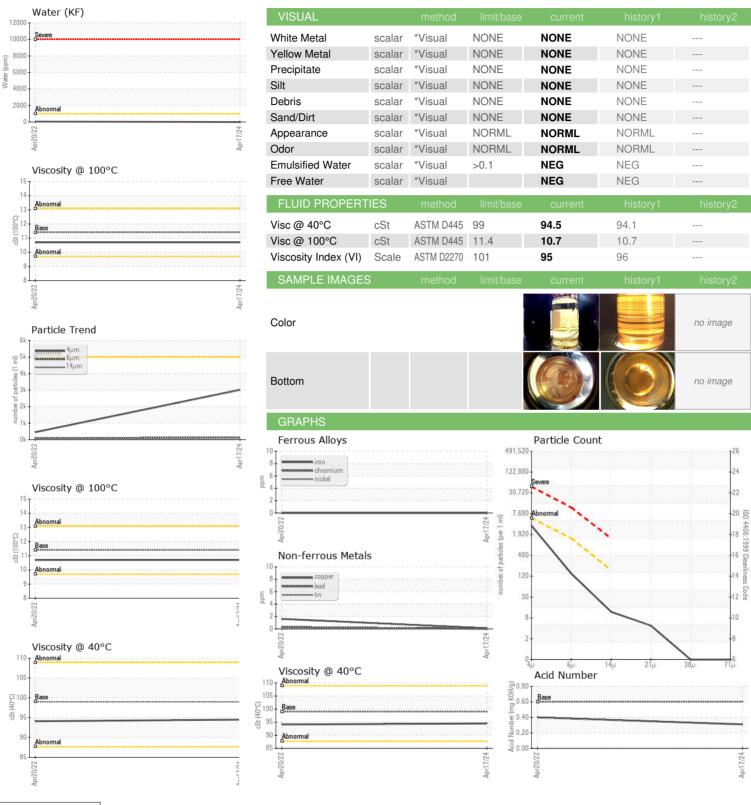





Certificate 12367

Laboratory Sample No.

Lab Number : 06155915

: TO50000807 Unique Number: 10991338

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 22 Apr 2024 **Tested** : 23 Apr 2024 Diagnosed : 23 Apr 2024 - Wes Davis

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**DALLAS MORNING NEWS** 

3900 W PLANO PKWY PLANO, TX US 75075

Contact: KENNY CLARK kclark@dallasnews.com

T: (214)977-6929 F: (214)977-6888

Contact/Location: KENNY CLARK - DALPLATO