


OIL ANALYSIS REPORT

Sample Rating Trend

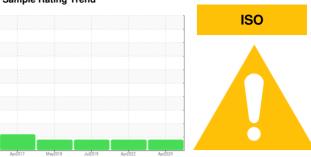

Machine Id

TKS PRESS 3 UNIT 8

Component Hydraulic System

TULCO LUBSOIL SUPER HYDRAULIC AW 68 (50 GAL

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

68 (50 GAL)		Apr2017	May2018	Jul2019 Apr2022	Apr2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO50000875	TO5000734	TO5000428
Sample Date		Client Info		17 Apr 2024	20 Apr 2022	23 Jul 2019
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	3	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	17	22	20
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	1	2
Lead	ppm	ASTM D5185m	>10	2	2	2
Copper	ppm	ASTM D5185m		23	22	18
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Antimony	ppm	ASTM D5185m	7.0			0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	<1	<1
ADDITIVES	PPIII	method	limit/base		history1	history2
Boron	nnm	ASTM D5185m	IIIIII/Dase	0	<1	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		o <1	<1	<1
-				3	4	6
Magnesium	ppm	ASTM D5185m		3	1	
Calcium	ppm	ASTM D5185m	405	_		4
Phosphorus	ppm	ASTM D5185m	425	146	164	179
Zinc	ppm	ASTM D5185m	500	121	145	140
Sulfur	ppm	ASTM D5185m	1900	5576	3616	5498
CONTAMINANTS	8	method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>20	12	14	18
Sodium	ppm	ASTM D5185m		<1	<1	2
Potassium	ppm	ASTM D5185m	>20	1	3	2
Water	%	ASTM D6304	>0.1	0.00	0.006	0.005
ppm Water	ppm	ASTM D6304	>1000	0	69.1	50
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>	<u>▲</u> 26704	▲ 39179
Particles >6µm		ASTM D7647	>1300	772	1970	△ 2986
Particles >14µm		ASTM D7647	>160	10	18	50
Particles >21µm		ASTM D7647	>40	3	4	15
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>^</u> 21/17/10	<u>^</u> 22/18/11	<u>22/19/13</u>
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

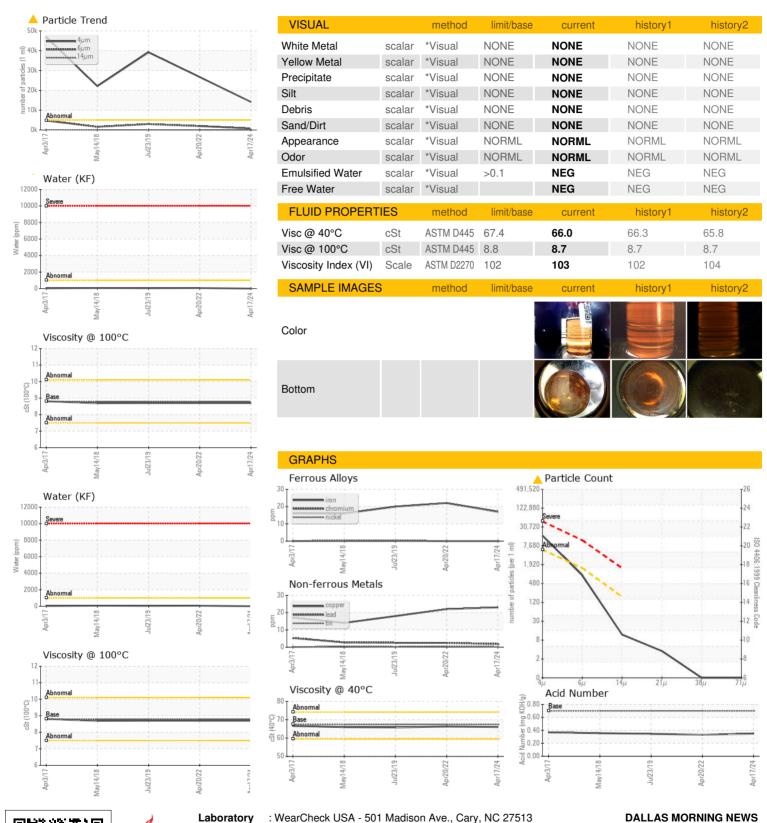





Certificate 12367

Laboratory Sample No.

Lab Number : 06155921 Unique Number: 10991344

: TO50000875

Received : 22 Apr 2024 **Tested** Diagnosed

: 23 Apr 2024 : 24 Apr 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DALLAS MORNING NEWS 3900 W PLANO PKWY

PLANO, TX US 75075

Contact: KENNY CLARK kclark@dallasnews.com

T: (214)977-6929 F: (214)977-6888