

Area  
**Thermoforming**  
 Machine Id  
**Line 12 A Extruder (S/N 328920-1-1)**  
 Component  
**Bevel Helical Gearbox**  
 Fluid  
**MOBIL SHC 632 (21 GAL)**

## DIAGNOSIS

**Recommendation**  
 We recommend you service the filters on this component. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a high amount of particulates present in the oil. Elemental level of silicon (Si) above normal.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TO50002282</b>	TO50001928	TO50001612
Sample Date	Client Info			<b>17 Apr 2024</b>	16 Nov 2023	17 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>12</b>	9	16
Iron	ppm	ASTM D5185m	>150	<b>12</b>	13	12
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>19</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>50	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	0
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	23	2
Phosphorus	ppm	ASTM D5185m		<b>412</b>	461	483
Zinc	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Sulfur	ppm	ASTM D5185m		<b>209</b>	70	94

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>▲ 81</b>	▲ 54	51
Sodium	ppm	ASTM D5185m		<b>0</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	<1
Water	%	ASTM D6304	>0.1	<b>0.006</b>	0.012	0.005
ppm Water	ppm	ASTM D6304	>1000	<b>62</b>	122	52.6

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	<b>▲ 228720</b>	▲ 7518	▲ 7164
Particles >6µm		ASTM D7647	>320	<b>▲ 198136</b>	▲ 1353	▲ 1528
Particles >14µm		ASTM D7647	>80	<b>▲ 79624</b>	▲ 135	▲ 81
Particles >21µm		ASTM D7647	>20	<b>▲ 24855</b>	▲ 52	▲ 23
Particles >38µm		ASTM D7647	>4	<b>▲ 177</b>	3	2
Particles >71µm		ASTM D7647	>3	<b>▲ 7</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<b>▲ 25/25/23</b>	▲ 20/18/14	▲ 20/18/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.49</b>	0.45	0.52

# OIL ANALYSIS REPORT

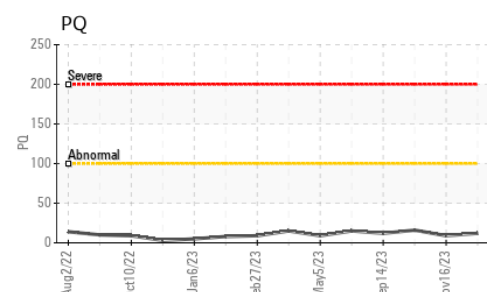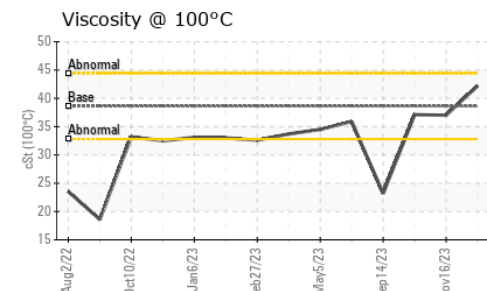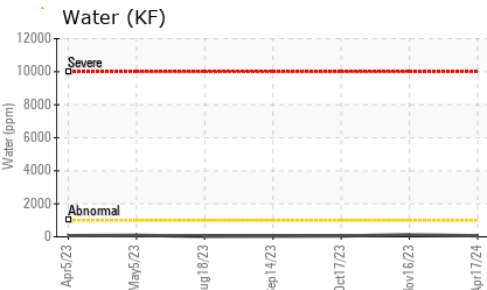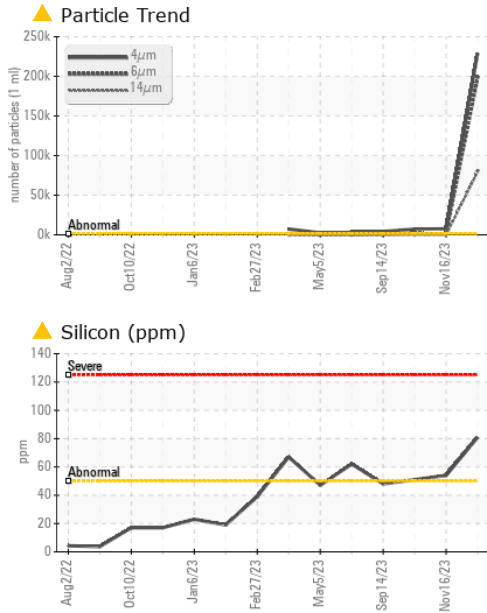


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	325.8	346	300
Visc @ 100°C	cSt	ASTM D445	38.6	42.2	37.0
Viscosity Index (VI)	Scale	ASTM D2270	169	177	172

**SAMPLE IMAGES**

method	limit/base	current	history1	history2
Color				
Bottom				

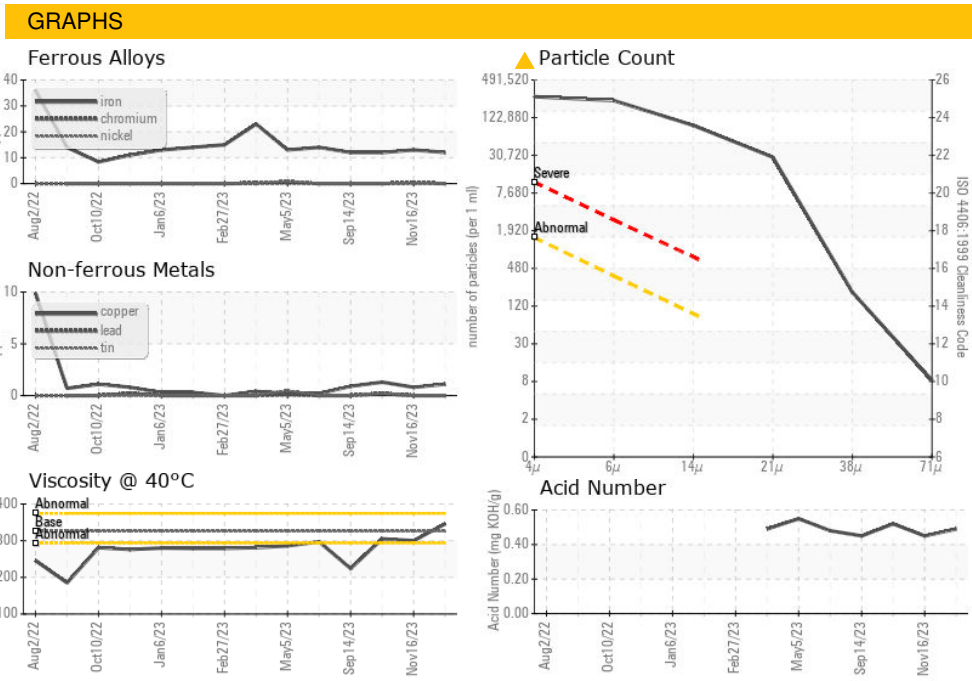

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50002282  
**Lab Number** : 06155943  
**Unique Number** : 10991366  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, PrtCount, VI )  
**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Don Baldrige

**DART CONTAINER CORPORATION**  
 4444 W LEADBETTER DR  
 DALLAS, TX  
 US 75236  
 Contact: YON PALOMINO  
 yon.palomino@dart.biz  
 T: (214)775-5673  
 F: