

# **OIL ANALYSIS REPORT**

KAESER BS51 1434391 (S/N 4101188)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

Machine Id

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear


All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





|                                    | IATION | method                     | limit/base    | current       | history1    | history2    |
|------------------------------------|--------|----------------------------|---------------|---------------|-------------|-------------|
| Sample Number                      |        | Client Info                |               | KCPA017048    | KCP49385    | KCP43997    |
| Sample Date                        |        | Client Info                |               | 12 Apr 2024   | 19 Aug 2022 | 22 Nov 2021 |
| Machine Age                        | hrs    | Client Info                |               | 15161         | 69346       | 69346       |
| Dil Age                            | hrs    | Client Info                |               | 0             | 0           | 0           |
| Oil Changed                        |        | Client Info                |               | Changed       | Changed     | Changed     |
| Sample Status                      |        |                            |               | ATTENTION     | ABNORMAL    | ABNORMAL    |
| WEAR METALS                        |        | method                     | limit/base    | current       | history1    | history2    |
| Iron                               | ppm    | ASTM D5185m                | >50           | 0             | <1          | 1           |
| Chromium                           | ppm    | ASTM D5185m                | >10           | <1            | 0           | 0           |
| Nickel                             | ppm    | ASTM D5185m                | >3            | 0             | 0           | 0           |
| Titanium                           | ppm    | ASTM D5185m                | >3            | <1            | 0           | 0           |
| Silver                             | ppm    | ASTM D5185m                | >2            | 0             | 0           | <1          |
| Aluminum                           | ppm    | ASTM D5185m                |               | <1            | <1          | <1          |
| Lead                               | ppm    | ASTM D5185m                | >10           | 0             | 0           | 0           |
| Copper                             | ppm    | ASTM D5185m                |               | 2             | 2           | 4           |
| Tin                                |        | ASTM D5185m                | >50<br>>10    | 0             | 0           | 4<br><1     |
|                                    | ppm    |                            | >10           | 0             |             | < 1         |
| Antimony                           | ppm    | ASTM D5185m                |               |               |             |             |
| Vanadium                           | ppm    | ASTM D5185m                |               | <1            | 0           | 0           |
| Cadmium                            | ppm    | ASTM D5185m                |               | 0             | 0           | 0           |
| ADDITIVES                          |        | method                     | limit/base    | current       | history1    | history2    |
| Boron                              | ppm    | ASTM D5185m                | 0             | 0             | 0           | 26          |
| Barium                             | ppm    | ASTM D5185m                | 90            | 7             | 2           | 5           |
| Molybdenum                         | ppm    | ASTM D5185m                | 0             | 0             | 0           | 0           |
| Manganese                          | ppm    | ASTM D5185m                |               | <1            | <1          | <1          |
| Magnesium                          | ppm    | ASTM D5185m                | 100           | 45            | 44          | 50          |
| Calcium                            | ppm    | ASTM D5185m                | 0             | <1            | 0           | <1          |
| Phosphorus                         | ppm    | ASTM D5185m                | 0             | 0             | 1           | 1           |
| Zinc                               | ppm    | ASTM D5185m                | 0             | 22            | 24          | 36          |
| Sulfur                             | ppm    | ASTM D5185m                | 23500         | 22467         | 18393       | 20727       |
| CONTAMINANTS                       |        | method                     | limit/base    | current       | history1    | history2    |
| Silicon                            | ppm    | ASTM D5185m                | >25           | <1            | <1          | 1           |
| Sodium                             | ppm    | ASTM D5185m                |               | 12            | 12          | 24          |
| Potassium                          | ppm    | ASTM D5185m                | >20           | 2             | 0           | 4           |
| Water                              | %      | ASTM D6304                 | >0.05         | 0.015         | 0.027       | 0.011       |
| ppm Water                          | ppm    | ASTM D6304                 | >500          | 153           | 276.0       | 114.0       |
| FLUID CLEANLIN                     | IESS   | method                     | limit/base    | current       | history1    | history2    |
| Particles >4µm                     |        | ASTM D7647                 |               | 9071          | 6513        | 31845       |
| Particles >6µm                     |        | ASTM D7647                 | >1300         | <b>e</b> 1469 | 674         | ▲ 6913      |
| Particles >14µm                    |        | ASTM D7647                 | >80           | 66            | <b>1</b> 70 | ▲ 383       |
| Particles >21µm                    |        | ASTM D7647                 |               | 15            | <u> </u>    | <u> </u>    |
|                                    |        | ASTM D7647                 | >4            | 1             | 4           | 2           |
|                                    |        |                            |               |               |             |             |
| Particles >38µm                    |        | ASTM D7647                 | >3            | 0             | 0           | 0           |
|                                    |        | ASTM D7647<br>ISO 4406 (c) | >3<br>>/17/13 | 0             | 0           | 0           |
| Particles >38µm<br>Particles >71µm | TION   |                            |               |               |             |             |


Report Id: CONGEO [WUSCAR] 06155955 (Generated: 04/24/2024 14:05:50) Rev: 1


Contact/Location: MICHAEL T. - CONGEO
















Certificate 12367



| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.05      | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERT    | IES    | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 45         | 48.2    | 46.9     | 49.9     |
| SAMPLE IMAGES    | 5      | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            | •       |          |          |
| Bottom           |        |           |            |         |          |          |

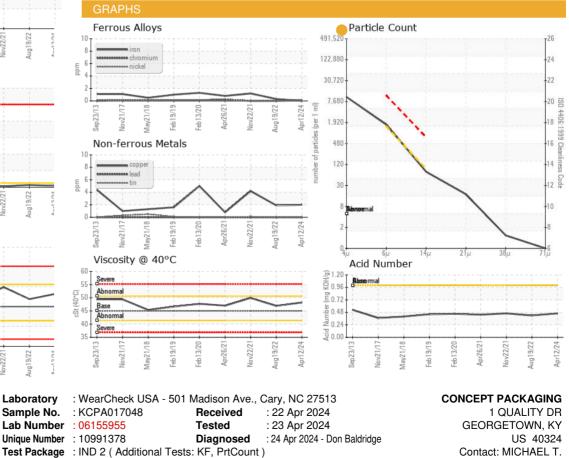



\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONGEO [WUSCAR] 06155955 (Generated: 04/24/2024 14:05:51) Rev: 1

Contact/Location: MICHAEL T. - CONGEO

michaelt@concept-pkg.com

Page 2 of 2

Т:

F: