

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7616976

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM		ام م داخ م مور			hi at a mut	D. material		
SAMPLE INFORM	VIATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA017042	KCP52217	KCP43096		
Sample Date		Client Info		04 Apr 2024	11 Jan 2023	17 Nov 2021		
Machine Age	hrs	Client Info		10609	7203	2379		
Oil Age	hrs	Client Info		3406	4824	2379		
Oil Changed		Client Info		Changed	Changed	Changed		
Sample Status				NORMAL	ABNORMAL	SEVERE		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	0	<1		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m	>3	0	0	0		
Titanium	ppm	ASTM D5185m	>3	<1	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	<1		
Aluminum	ppm	ASTM D5185m	>10	0	0	0		
Lead	ppm	ASTM D5185m		0	0	0		
Copper	ppm	ASTM D5185m		5	12	4		
Tin	ppm	ASTM D5185m		0	0	0		
Antimony	ppm	ASTM D5185m	-			0		
Vanadium	ppm	ASTM D5185m		<1	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
	ppin		11 14 10					
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	16		
Barium	ppm	ASTM D5185m	90	0	1	0		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m		0	0	<1		
Magnesium	ppm	ASTM D5185m	100	<1	<1	15		
Calcium	ppm	ASTM D5185m	0	0	0	0		
Phosphorus	ppm	ASTM D5185m	0	0	2	5		
Zinc	ppm	ASTM D5185m	0	3	5	10		
Sulfur	ppm	ASTM D5185m	23500	21381	17330	17463		
CONTAMINANTS	6	method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1		
Sodium	ppm	ASTM D5185m		0	0	7		
Potassium	ppm	ASTM D5185m	>20	0	0	3		
Water	%	ASTM D6304	>0.05	0.004	0.006	0.014		
ppm Water	ppm	ASTM D6304	>500	45	63.9	145.1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		3607	22294	139956		
Particles >6µm		ASTM D7647	>1300	1126	1 0379	▲ 63402		
Particles >14µm		ASTM D7647	>80	26	<u> </u>	A 811		
Particles >21µm		ASTM D7647	>20	5	<u> </u>	6 9		
Particles >38µm		ASTM D7647	>4	0	3	2		
Particles >71µm		ASTM D7647	>3	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/12	▲ 22/21/15	▲ 23/17		
FLUID DEGRADA	ATION _	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.48	0.42	0.276		
:07:14) Rev: 1	iiiy N∪⊓/ÿ	AG I IVI DOU40	1.0		Contact/Location: Service Manager - FIBJEE			


Report Id: FIRJEF [WUSCAR] 06155958 (Generated: 04/24/2024 14:07:14) Rev: 1


Contact/Location: Service Manager - FIRJEF Page 1 of 2



OIL ANALYSIS REPORT

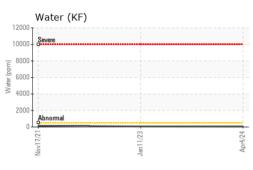



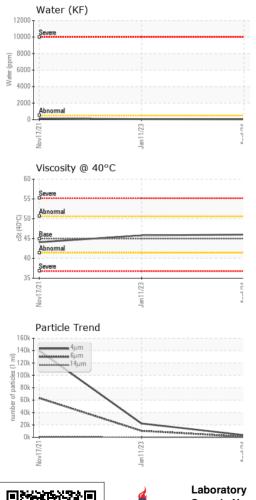


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.0	45.8	44.1
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

Bottom

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

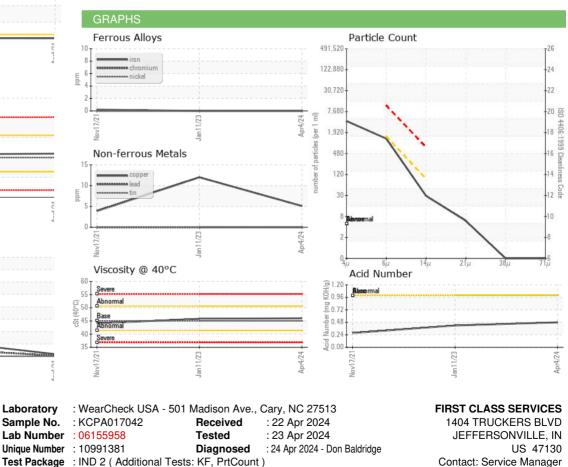

Report Id: FIRJEF [WUSCAR] 06155958 (Generated: 04/24/2024 14:07:14) Rev: 1

Certificate 12367

Contact/Location: Service Manager - FIRJEF Page 2 of 2

T:

F: