

**NORMAL**



Machine Id  
**GOODYEAR AKRON TEST 39-2**  
 Component  
**Hydraulic System**  
 Fluid  
**CONOCO MEGAFLOW AW 46 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>ST46147</b>	ST44348	---
Sample Date	Client Info	<b>21 Apr 2024</b>	02 Jan 2023	---
Machine Age	hrs Client Info	<b>0</b>	0	---
Oil Age	hrs Client Info	<b>0</b>	0	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>NORMAL</b>	NORMAL	---

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>20	<b>13</b>	14	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>20</b>	18	---
Phosphorus	ppm	ASTM D5185m		<b>300</b>	293	---
Zinc	ppm	ASTM D5185m		<b>314</b>	291	---
Sulfur	ppm	ASTM D5185m		<b>952</b>	816	---

**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>0</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.009	---
ppm Water	ppm	ASTM D6304	>500	<b>26</b>	90.1	---






**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm		ASTM D7647	>640	<b>309</b>	377	---
Particles >6µm		ASTM D7647	>160	<b>78</b>	98	---
Particles >14µm		ASTM D7647	>20	<b>13</b>	12	---
Particles >21µm		ASTM D7647	>4	<b>6</b>	5	---
Particles >38µm		ASTM D7647	>3	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>16/14/11	<b>15/13/11</b>	16/14/11	---

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	<b>0.35</b>	0.30	---
------------------	----------	------------	------	-------------	------	-----


# OIL ANALYSIS REPORT

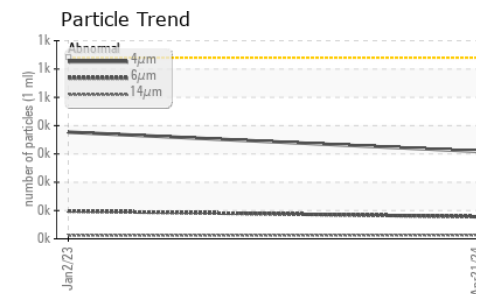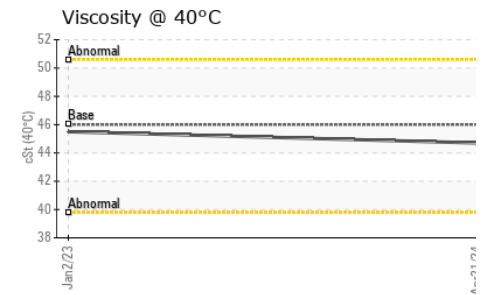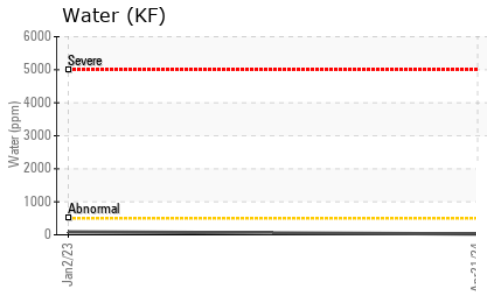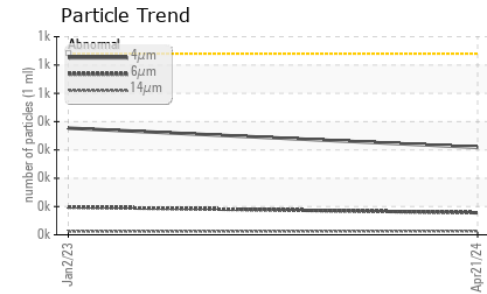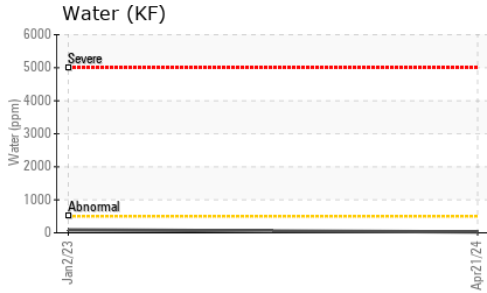





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	<b>44.7</b>	45.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

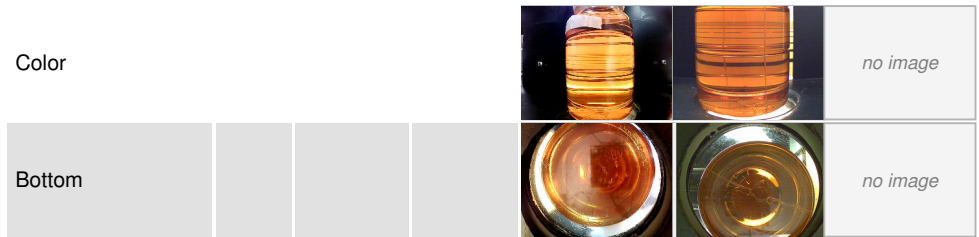

## GRAPHS

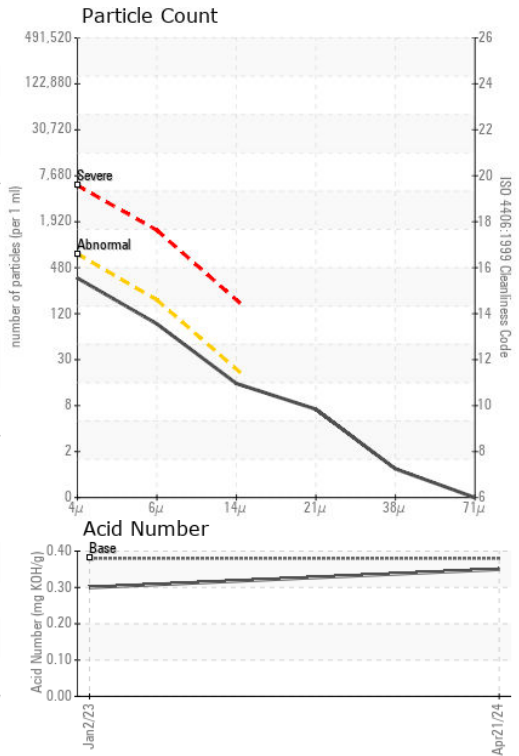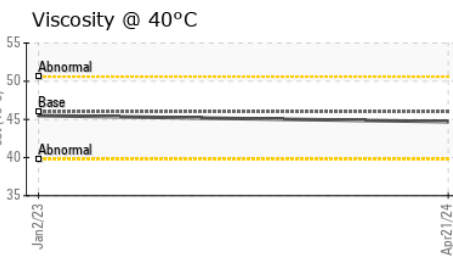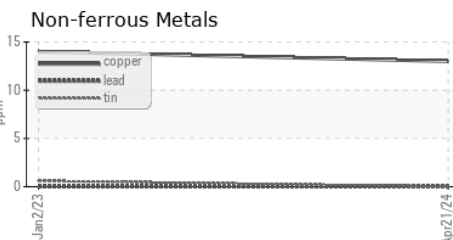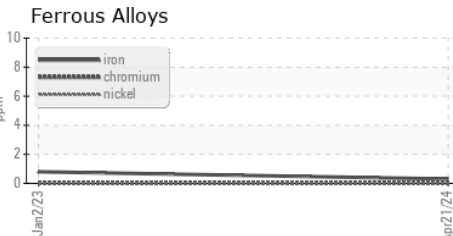

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46147  
**Lab Number** : 06155970  
**Unique Number** : 10991393  
**Test Package** : IND 2 ( Additional Tests: KF )  
**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Jonathan Hester

**FLUID POWER SOLUTIONS**  
 4400 Edgewyn Ave.  
 Hilliard, OH  
 US 43026  
 Contact: SCOTT ROGERS  
 srogers@fluid-power-solutions.com  
 T: (614)777-8954  
 F: (614)777-8640

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)