


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

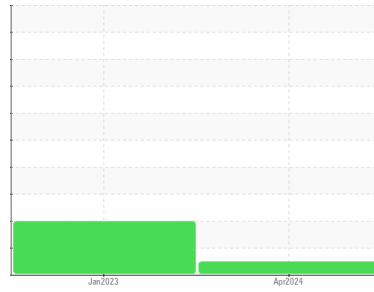

Machine Id  
**GOODYEAR AKRON TEST 105 A&B**  
 Component  
**Hydraulic System**  
 Fluid  
**CONOCO MEGAFLOW AW 46 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST46359</b>	ST42613	---
Sample Date	Client Info			<b>21 Apr 2024</b>	02 Jan 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>20	<b>12</b>	11	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>20</b>	14	---
Phosphorus	ppm	ASTM D5185m		<b>320</b>	281	---
Zinc	ppm	ASTM D5185m		<b>323</b>	262	---
Sulfur	ppm	ASTM D5185m		<b>791</b>	796	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>2</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.015	---
ppm Water	ppm	ASTM D6304	>500	<b>31</b>	152.5	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	<b>204</b>	▲ 2855	---
Particles >6µm		ASTM D7647	>160	<b>45</b>	▲ 1056	---
Particles >14µm		ASTM D7647	>20	<b>6</b>	▲ 110	---
Particles >21µm		ASTM D7647	>4	<b>2</b>	▲ 37	---
Particles >38µm		ASTM D7647	>3	<b>0</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>16/14/11	<b>15/13/10</b>	▲ 19/17/14	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	<b>0.34</b>	0.30	---


# OIL ANALYSIS REPORT

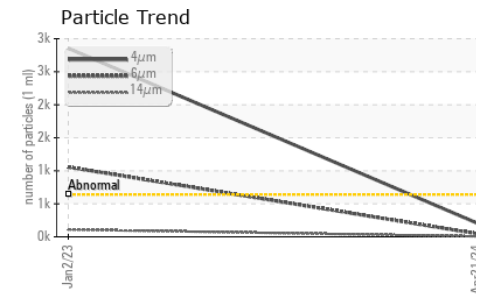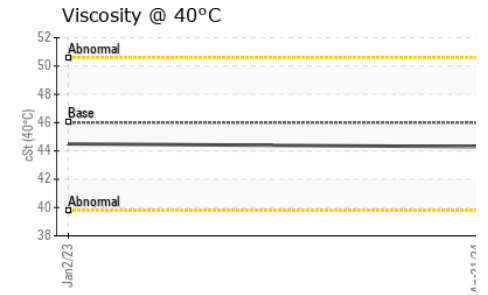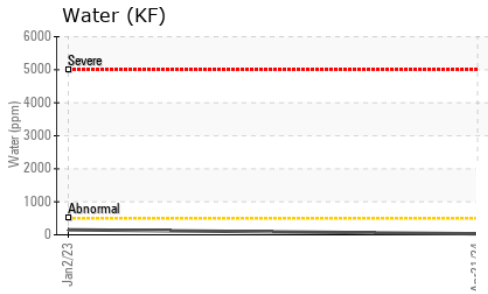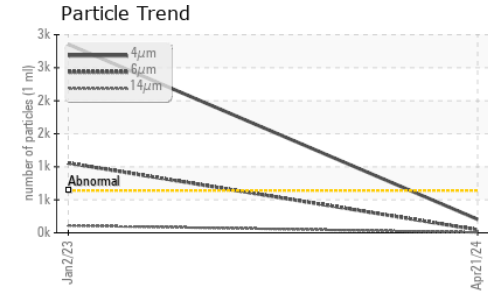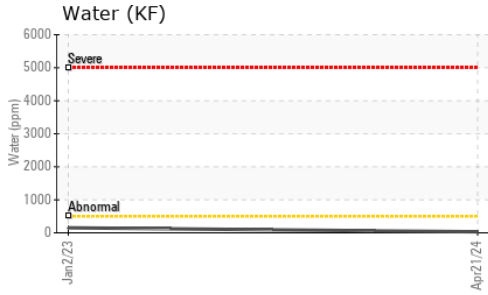





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	<b>44.3</b>	44.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

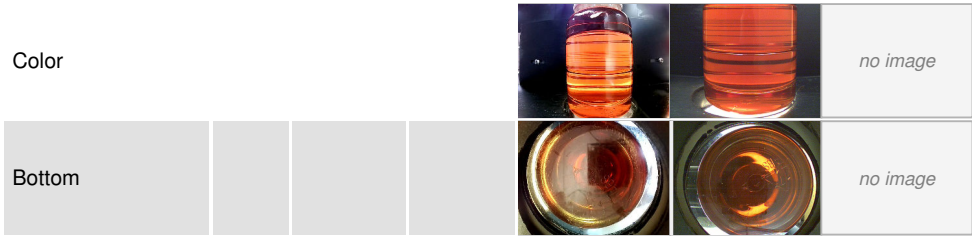

## GRAPHS

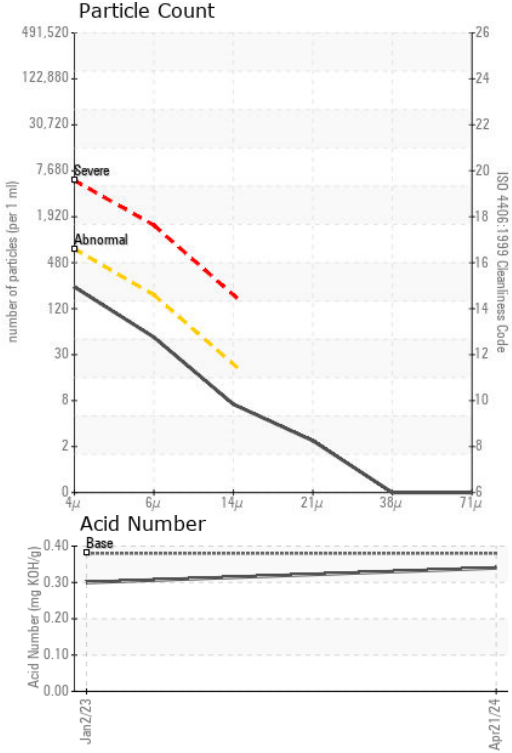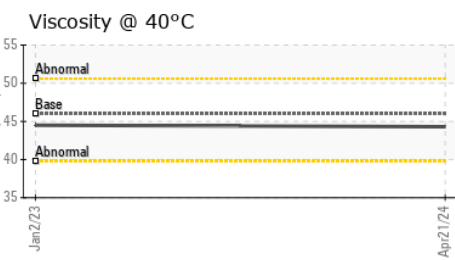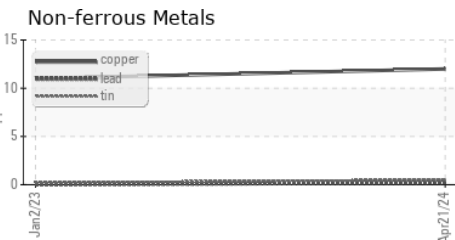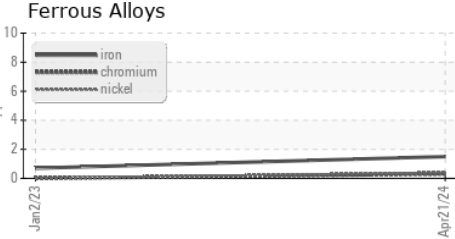

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46359 **Received** : 22 Apr 2024  
**Lab Number** : **06155988** **Tested** : 23 Apr 2024  
**Unique Number** : 10991411 **Diagnosed** : 24 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**FLUID POWER SOLUTIONS**  
 4400 Edgewyn Ave.  
 Hilliard, OH 43026  
 Contact: SCOTT ROGERS  
 srogers@fluid-power-solutions.com  
 T: (614)777-8954  
 F: (614)777-8640

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)