


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

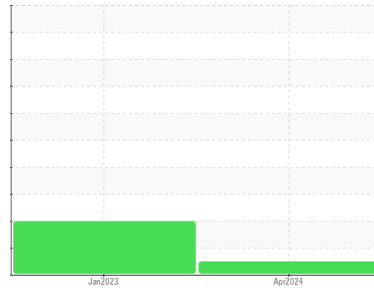

Machine Id

## GOODYEAR AKRON TEST 121

Component

Hydraulic System

Fluid

CONOCO MEGAFLOW AW 46 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST46273</b>	ST44231	---
Sample Date	Client Info			<b>21 Apr 2024</b>	02 Jan 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>20	<b>16</b>	16	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>17</b>	11	---
Phosphorus	ppm	ASTM D5185m		<b>345</b>	287	---
Zinc	ppm	ASTM D5185m		<b>322</b>	245	---
Sulfur	ppm	ASTM D5185m		<b>875</b>	836	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.004	---
ppm Water	ppm	ASTM D6304	>500	<b>28</b>	43.3	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	<b>139</b>	▲ 3281	---
Particles >6µm		ASTM D7647	>160	<b>24</b>	▲ 1169	---
Particles >14µm		ASTM D7647	>20	<b>4</b>	▲ 113	---
Particles >21µm		ASTM D7647	>4	<b>2</b>	▲ 38	---
Particles >38µm		ASTM D7647	>3	<b>0</b>	2	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>16/14/11	<b>14/12/9</b>	▲ 19/17/14	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	<b>0.32</b>	0.28	---


# OIL ANALYSIS REPORT

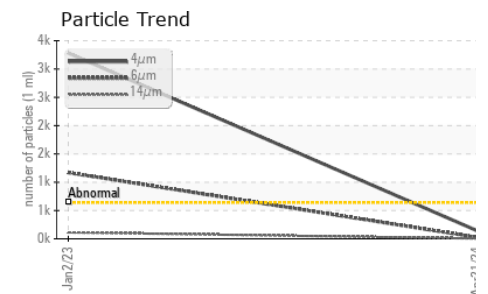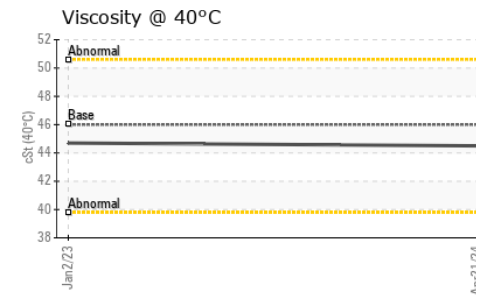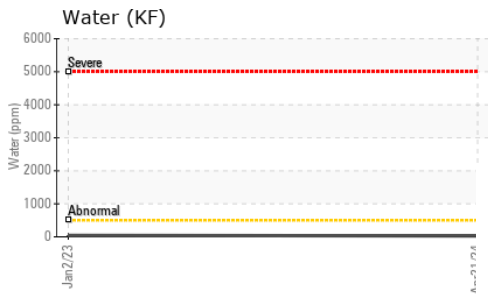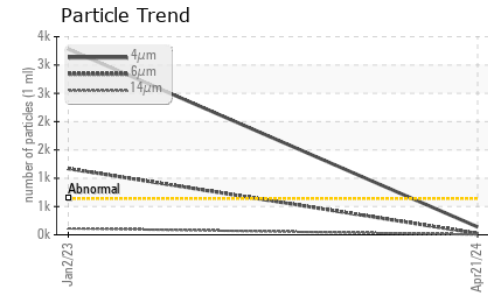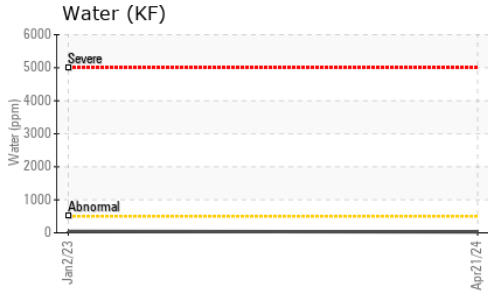






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

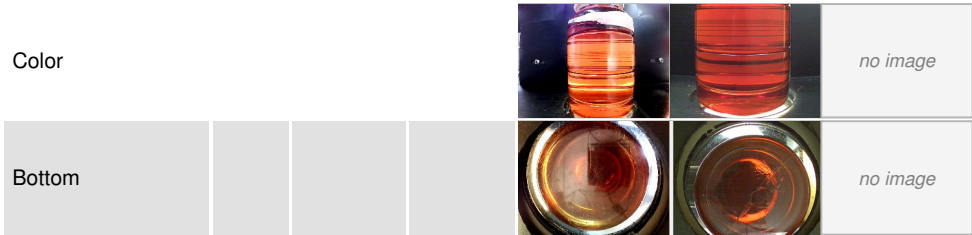

## GRAPHS

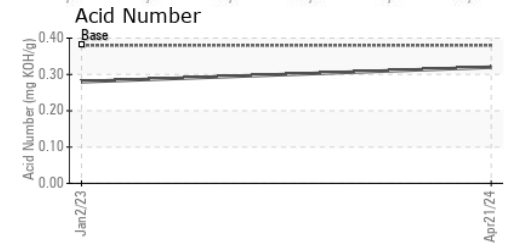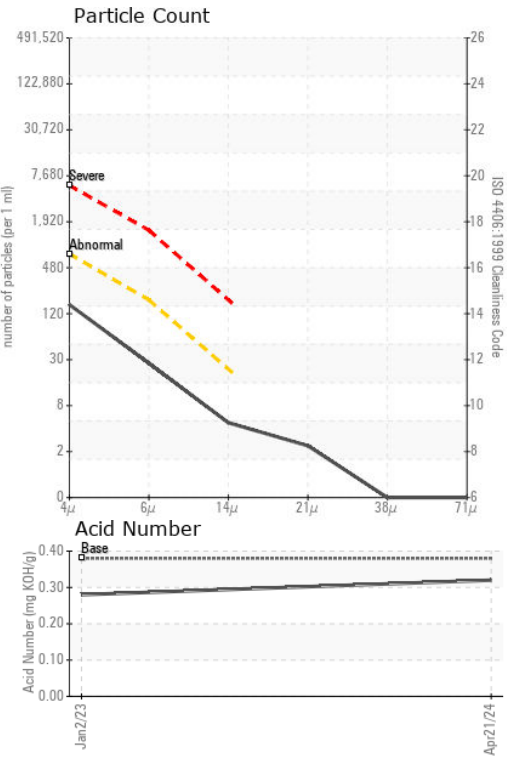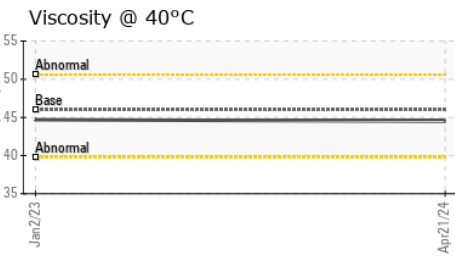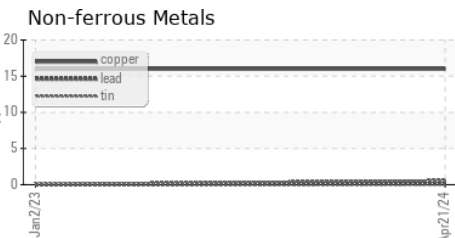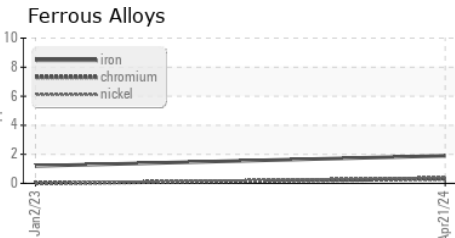

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46273 **Received** : 22 Apr 2024  
**Lab Number** : 06155992 **Tested** : 23 Apr 2024  
**Unique Number** : 10991415 **Diagnosed** : 24 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**FLUID POWER SOLUTIONS**  
 4400 Edgewyn Ave.  
 Hilliard, OH  
 US 43026  
 Contact: SCOTT ROGERS  
 srogers@fluid-power-solutions.com  
 T: (614)777-8954  
 F: (614)777-8640

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)