


PROBLEM SUMMARY

Sample Rating Trend





WATER

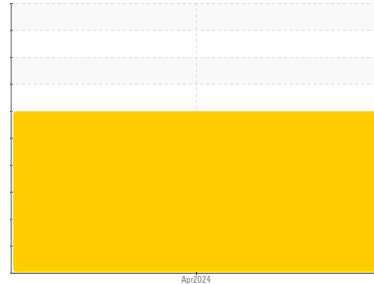

Machine Id
NK 112614
Component
Compressor
Fluid
{not provided} (--- GAL)

COMPONENT CONDITION SUMMARY

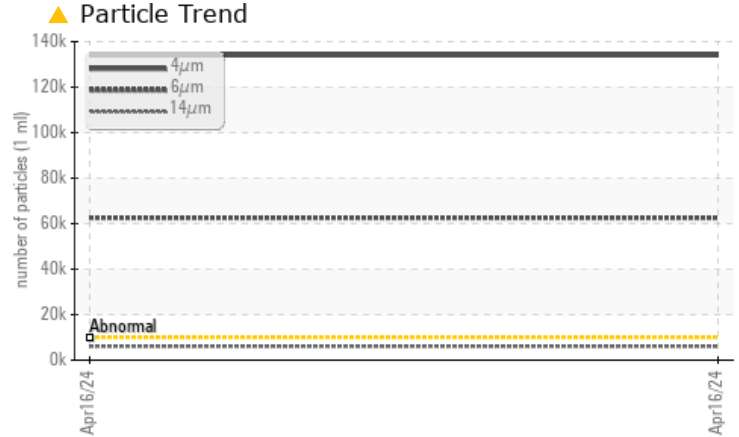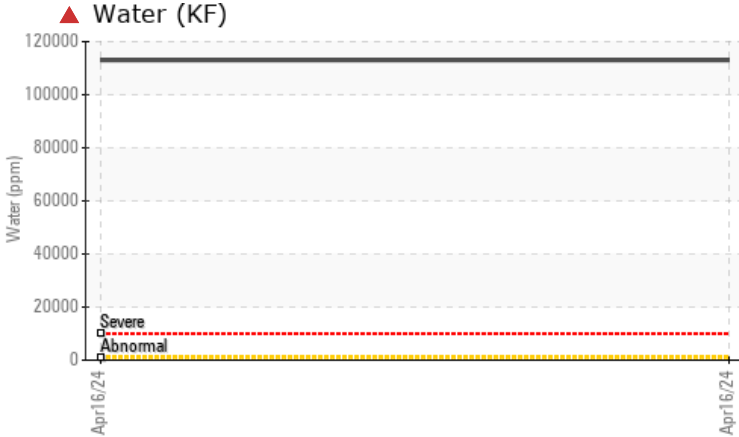

RECOMMENDATION

We advise that you follow the water drain-off procedure for this component, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304	>0.1	▲ 11.30	---	---
ppm Water	ppm	ASTM D6304	>1000	▲ 113046	---	---
Particles >4µm		ASTM D7647	>10000	▲ 134016	---	---
Particles >6µm		ASTM D7647	>2500	▲ 62560	---	---
Particles >14µm		ASTM D7647	>320	▲ 6079	---	---
Particles >21µm		ASTM D7647	>80	▲ 1842	---	---
Particles >38µm		ASTM D7647	>20	▲ 206	---	---
Particles >71µm		ASTM D7647	>4	▲ 29	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 24/23/20	---	---

Customer Id: CIMCAR
Sample No.: TO90004171
Lab Number: 06156057
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Water Drain-off	---	---	?	We advise that you follow the water drain-off procedure for this component, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend



WATER



Machine Id
NK 112614
 Component
Compressor
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

- Recommendation**
 We advise that you follow the water drain-off procedure for this component, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is a high amount of particulates present in the oil. There is a high concentration of water present in the oil.
- Fluid Condition**
 The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO90004171	---	---
Sample Date	Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	6	---	---
Chromium	ppm	ASTM D5185m >10	<1	---	---
Nickel	ppm	ASTM D5185m	1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >25	6	---	---
Lead	ppm	ASTM D5185m >25	0	---	---
Copper	ppm	ASTM D5185m >50	<1	---	---
Tin	ppm	ASTM D5185m >15	1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	<1	---	---
Calcium	ppm	ASTM D5185m	2	---	---
Phosphorus	ppm	ASTM D5185m	14	---	---
Zinc	ppm	ASTM D5185m	5	---	---
Sulfur	ppm	ASTM D5185m	22	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	---	---
Sodium	ppm	ASTM D5185m	8	---	---
Potassium	ppm	ASTM D5185m >20	1	---	---
Water	%	ASTM D6304 >0.1	▲ 11.30	---	---
ppm Water	ppm	ASTM D6304 >1000	▲ 113046	---	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 134016	---	---
Particles >6µm	ASTM D7647	>2500	▲ 62560	---	---
Particles >14µm	ASTM D7647	>320	▲ 6079	---	---
Particles >21µm	ASTM D7647	>80	▲ 1842	---	---
Particles >38µm	ASTM D7647	>20	▲ 206	---	---
Particles >71µm	ASTM D7647	>4	▲ 29	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 24/23/20	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.16	---	---

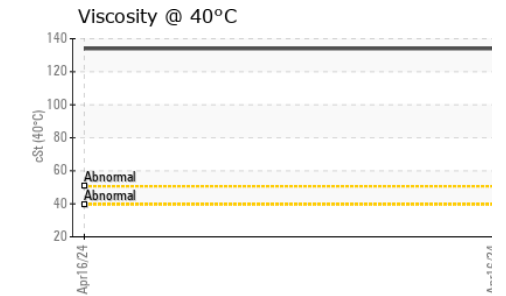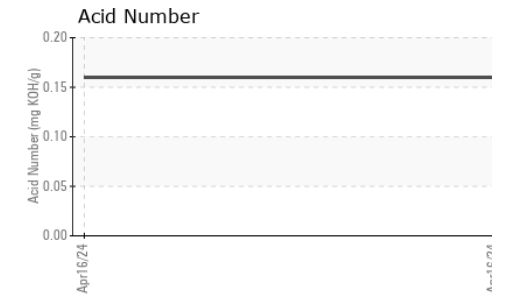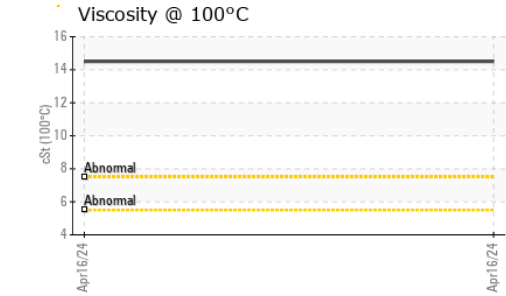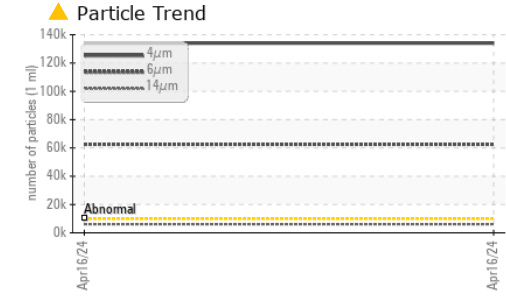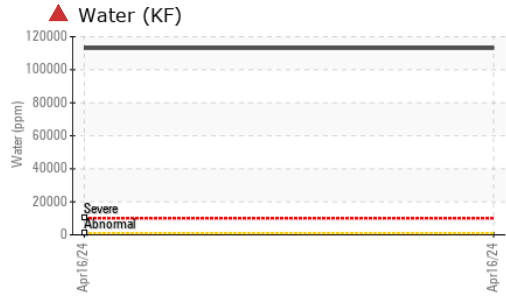

OIL ANALYSIS REPORT






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	134	---	---
Visc @ 100°C	cSt	ASTM D445	14.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270	107	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

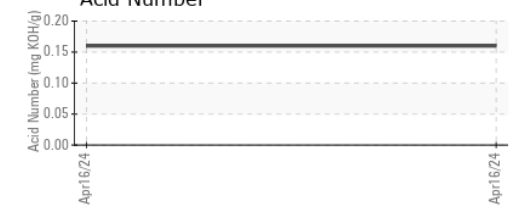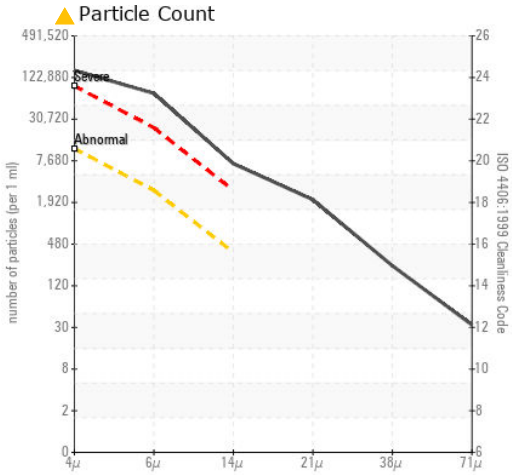

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO90004171 **Received** : 22 Apr 2024
Lab Number : **06156057** **Tested** : 23 Apr 2024
Unique Number : 10991480 **Diagnosed** : 24 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

CIMARRON ENERGY - CARLSBAD
 4425 GRANDI RD, UNIT F
 CARLSBAD, NM
 UM 88220-8923
 Contact: CARLOS LEAL
 cleal@cimarron.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)