

OIL ANALYSIS REPORT

Sample Rating Trend ISO

Machine Id

LEROI VRUOXY0006 (S/N LE10574)

Compressor

CIMARRON HB-150 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please note that this is a corrected copy.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90003980		
Sample Date		Client Info		12 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	0	Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	15		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	1		
Tin	ppm	ASTM D5185m	>15	2		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	0	<1		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	38		
Zinc	ppm	ASTM D5185m	0	6		
Sulfur	ppm	ASTM D5185m	0	610		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		10		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>2.26	0.319		
ppm Water	ppm	ASTM D6304	>22600	3196		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	<u> </u>		
Particles >6µm		ASTM D7647	>2500	A 82330		
Particles >14µm		ASTM D7647	>320	<u> </u>		
Particles >21µm		ASTM D7647	>80	<u> </u>		
Particles >38µm		ASTM D7647	>20	<u> </u>		
Particles >71µm		ASTM D7647	>4	<u> </u>		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>4</u> 24/24/21		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Asid Number (ANI)	ma 1/011/a	ACTM DODAE		0.50		


Acid Number (AN)

mg KOH/g ASTM D8045

0.52



OIL ANALYSIS REPORT

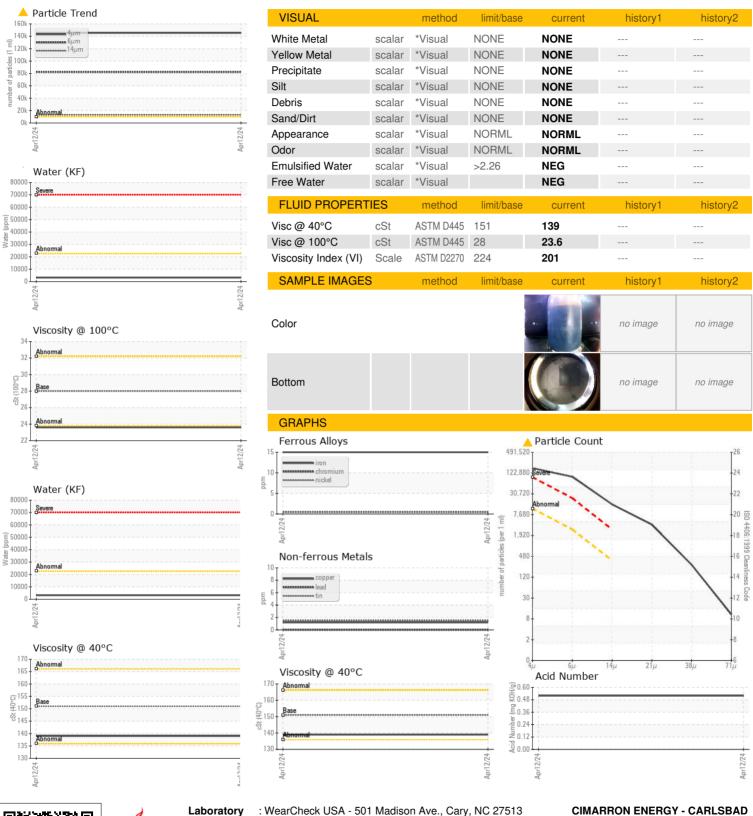





Certificate 12367

Laboratory

Sample No.

: TO90003980 Lab Number : 06156061 Unique Number : 10991484

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 22 Apr 2024

Tested : 14 Jun 2024 Diagnosed

: 14 Jun 2024 - Doug Bogart

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: CARLOS LEAL - CIMCAR

Report Id: CIMCAR [WUSCAR] 06156061 (Generated: 06/15/2024 05:44:34) Rev: 2

T:

F:

4425 GRANDI RD, UNIT F

Contact: CARLOS LEAL

cleal@cimarron.com

CARLSBAD, NM

UM 88220-8923