

## **OIL ANALYSIS REPORT**

### Area **PG-46** [285773] **ATLAS COPCO All650019 - HERITAGE-CRYSTAL**

Component Compressor

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL

| SAMPLE INFORM   | <b>IATION</b>  | method   | limit/base                       | current  | history1                             | history2                             |
|---|--|--|----------------------------------|--|--------------------------------------|--------------------------------------|
| Sample Number   |  | Client Info  |                                  | UFD0001584   |                                      |                                      |
| Sample Date   |  | Client Info  |                                  | 12 Apr 2024  |                                      |                                      |
| Machine Age   | hrs  | Client Info  |                                  | 0  |                                      |                                      |
| Oil Age   | hrs  | Client Info  |                                  | 0  |                                      |                                      |
| Oil Changed   |  | Client Info  |                                  | Changed  |                                      |                                      |
| Sample Status   |  |  |                                  | NORMAL   |                                      |                                      |
| WEAR METALS   |  | method   | limit/base                       | current  | history1                             | history2                             |
| Iron  | ppm  | ASTM D5185m  | >50                              | <1   |                                      |                                      |
| Chromium  | ppm  | ASTM D5185m  | >5                               | <1   |                                      |                                      |
| Nickel  | ppm  | ASTM D5185m  |                                  | <1   |                                      |                                      |
| Titanium  | ppm  | ASTM D5185m  |                                  | <1   |                                      |                                      |
| Silver  | ppm  | ASTM D5185m  |                                  | 0  |                                      |                                      |
| Aluminum  | ppm  | ASTM D5185m  | >15                              | 2  |                                      |                                      |
| Lead  | ppm  | ASTM D5185m  | >65                              | 0  |                                      |                                      |
| Copper  | ppm  | ASTM D5185m  | >65                              | 2  |                                      |                                      |
| Tin   | ppm  | ASTM D5185m  | >10                              | <1   |                                      |                                      |
| Vanadium  | ppm  | ASTM D5185m  |                                  | <1   |                                      |                                      |
| Cadmium   | ppm  | ASTM D5185m  |                                  | <1   |                                      |                                      |
|   |  |  |                                  |  |                                      |                                      |
| ADDITIVES   |  | method   | limit/base                       | current  | history1                             | history2                             |
| ADDITIVES<br>Boron  | ppm  | method<br>ASTM D5185m  | limit/base                       | current<br>0   | history1                             | history2                             |
|   | ppm<br>ppm   |  | limit/base                       |  |                                      | · · · · · ·                          |
| Boron   |  | ASTM D5185m  | limit/base                       | 0  |                                      |                                      |
| Boron<br>Barium   | ppm  | ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br><1  |                                      |                                      |
| Boron<br>Barium<br>Molybdenum   | ppm<br>ppm   | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br><1<br><1  |                                      |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese  | ppm<br>ppm<br>ppm  | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br><1<br><1<br>0   |                                      | <br>                                 |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium   | ppm<br>ppm<br>ppm<br>ppm   | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br><1<br><1<br>0<br><1   |                                      |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium  | ppm<br>ppm<br>ppm<br>ppm<br>ppm                                    | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1   | <br><br>                             |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                             | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1<br><1<br>333  | <br><br><br>                         |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1<br>333<br>49  | <br><br><br><br>                     |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   |                                  | 0<br><1<br><1<br>0<br><1<br><1<br>333<br>49<br>49  |                                      |                                      |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1<br>333<br>49<br>49<br>49<br>current                         | <br><br><br><br><br>history1         | <br><br><br><br><br>history2         |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon                                 | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm               | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br><b>method</b><br>ASTM D5185m                             | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1<br>333<br>49<br>49<br>49<br>2                               | <br><br><br><br><br>history1         | <br><br><br><br><br>history2         |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium                       | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm               | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br><b>method</b><br>ASTM D5185m                             | limit/base                       | 0<br><1<br><1<br>0<br><1<br><1<br>333<br>49<br>49<br>49<br>2<br>2<br>1                     | <br><br><br><br><br><br>history1<br> | <br><br><br><br>history2             |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium<br>Potassium          | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm | ASTM D5185m<br>ASTM D5185m | limit/base<br>>35<br>>20         | 0<br><1<br><1<br>0<br><1<br>333<br>49<br>49<br>49<br>2<br>2<br>1<br>1                      | <br><br><br><br><br><br>history1     | <br><br><br><br><br>history2         |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium<br>Potassium<br>Water | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm | ASTM D5185m<br>ASTM D5185m | limit/base<br>>35<br>>20<br>>0.1 | 0<br><1<br><1<br><1<br><1<br><1<br>333<br>49<br>49<br>49<br>2<br>2<br>1<br>1<br>1<br>0.048 | <br><br><br><br><br>history1<br><br> | <br><br><br><br><br>history2<br><br> |


Sample Rating Trend



(maa)

53

# **OIL ANALYSIS REPORT**

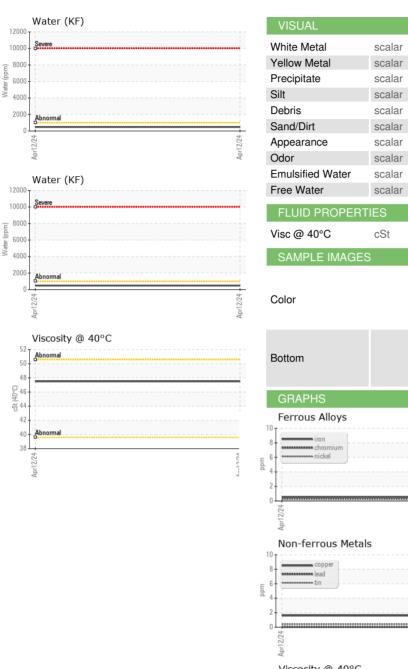

NONE \*Visual NONE \*Visual NONE NONE NONE \*Visual NONE scalar \*Visual NONE NONE \*Visual NONE NONE NONE NONE \*Visual NORML NORML \*Visual \*Visual NORML NORML \*Visual >0.1 0.2% scalar \*Visual NEG 47.5 ASTM D445 no image no image no image no image [nr] Viscosity @ 40°C Acid Number 0.1 (mg KOH/g) ٩ 0.05 ال Abnorm Acid 0.00 Apr12/24 -Apr12/24 Apr12/24 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 FLUID-AIRE DYNAMICS - (MN) : UFD0001584 Received : 22 Apr 2024 14250 JUDICIAL ROAD Lab Number : 06156119 Tested : 23 Apr 2024 BURNSVILLE, MN Diagnosed : 24 Apr 2024 - Sean Felton US 55306 Contact: Service Manager

Unique Number : 10991542 Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

55

50 (40°C) 45 ŝ

40

35

Laboratory

Sample No.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UCFLUBUR [WUSCAR] 06156119 (Generated: 04/24/2024 13:30:35) Rev: 1

Certificate 12367

Contact/Location: Service Manager - UCFLUBUR

T:

F: