


# **OIL ANALYSIS REPORT**



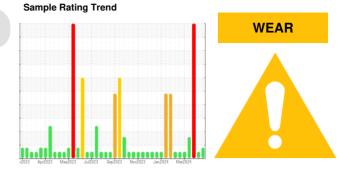

#### Machine Id **Coopersville CAT 6 CPVM06BE** Component **Biogas Engine**

CHEVRON HDAX 9500 GAS ENGINE OIL 40 (105 GAL)

	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0871573	WC0871561	WC0871504
Sample Date		Client Info		18 Apr 2024	09 Apr 2024	20 Mar 202
Machine Age	hrs	Client Info		32202	31990	31510
Oil Age	hrs	Client Info		212	1	810
Oil Changed		Client Info		Not Changd	Changed	Not Chango
Sample Status				ABNORMAL	NORMAL	SEVERE
CONTAMINATIO	N	method	limit/base	current	history1	history2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method		NEG	NEG	NEG
Glycol		WC Method	2.11	NEG	NEG	NEG
WEAR METALS		method	limit/base			
				current	history1	history
Iron	ppm	ASTM D5185m	>15	1	1	2
Chromium	ppm	ASTM D5185m	>4	<1	<1	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>6	<1	2	3
Lead	ppm	ASTM D5185m	>9	0	2	2
Copper	ppm	ASTM D5185m	>6	<u> </u>	2	7
Tin	ppm	ASTM D5185m	>4	3	3	<b>A</b> 7
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history
Boron	ppm	ASTM D5185m		2	2	3
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		2	3	4
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		8	6	10
Calcium	ppm	ASTM D5185m		1790	1766	1911
Phosphorus	ppm	ASTM D5185m		268	269	310
Zinc	ppm	ASTM D5185m		323	324	364
Zinc Sulfur	ppm ppm	ASTM D5185m ASTM D5185m			324 2040	364 2351
	ppm		limit/base	323		2351
Sulfur	ppm	ASTM D5185m		323 2167	2040	2351
Sulfur CONTAMINANTS	ppm	ASTM D5185m method	>181	323 2167 current	2040 history1	2351 history
Sulfur CONTAMINANTS Silicon	ppm ppm	ASTM D5185m method ASTM D5185m	>181 >21	323 2167 current 97	2040 history1 31	2351 history2 ▲ 201
Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	>181 >21	323 2167 current 97 2	2040 history1 31 <1	2351 history2 ▲ 201 2 4
Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>181 >21 >20	323 2167 current 97 2 0	2040 history1 31 <1 3 history1 0	2351 history2 ▲ 201 2 4
Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method	>181 >21 >20	323 2167 current 97 2 0 current	2040 history1 31 <1 3 history1	2351 history: ▲ 201 2 4 history:
Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method *ASTM D7844	>181 >21 >20	323 2167 current 97 2 0 current 0	2040 history1 31 <1 3 history1 0	2351 history: ▲ 201 2 4 history: 0
Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm % Abs/cm Abs/.1mm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7624	>181 >21 >20	323 2167 current 97 2 0 current 0 5.9	2040 history1 31 <1 3 history1 0 5.0	2351 history2 ▲ 201 2 4 history2 0 7.6 19.9
Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm % Abs/cm Abs/.1mm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7624 *ASTM D7415	>181 >21 >20 limit/base	323 2167 97 2 0 <u>current</u> 0 5.9 16.5	2040 history1 31 <1 3 history1 0 5.0 15.2	2351 history2 ▲ 201 2 4 history2 0 7.6 19.9
Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D7848 *ASTM D7844 *ASTM D7624 *ASTM D7415	>181 >21 >20 limit/base	323 2167 current 97 2 0 current 0 5.9 16.5 current	2040 history1 31 <1 3 history1 0 5.0 15.2 history1	2351 history2 ▲ 201 2 4 history2 0 7.6 19.9 history2

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 📥 Wear

The copper level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Submitted By: Chad Conroy



## **OIL ANALYSIS REPORT**


method


limit/base

current

history1

history2

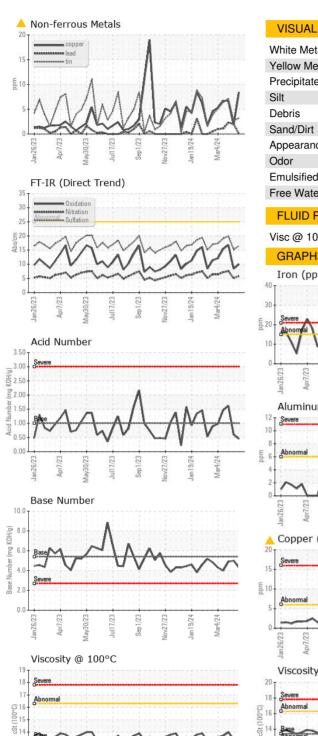

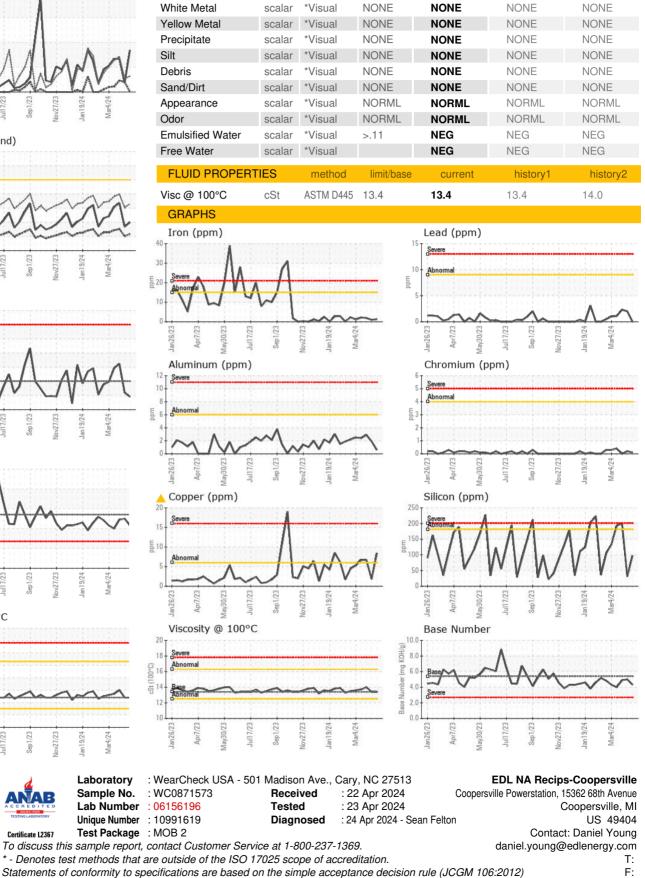

Report Id: EDLCOO [WUSCAR] 06156196 (Generated: 04/24/2024 14:12:40) Rev: 1

Certificate 12367

Mar4/24

Laboratory

Sample No.

Abnorma

Submitted By: Chad Conroy Page 2 of 2