




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - MOTOR GRADER
 Machine Id
78.67 [OKLAHOMA^102^EG - MOTOR GRADER]
 Component
Right Tandem
 Fluid
MOBIL 50W (--- GAL)

Sample Rating Trend

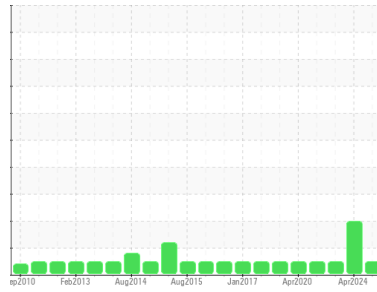

NORMAL



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0908850	WC0908759	WC0800845
Sample Date	Client Info			10 Apr 2024	02 Apr 2024	14 Apr 2023
Machine Age	hrs	Client Info		16530	16500	15528
Oil Age	hrs	Client Info		1000	2260	1288
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>425	100	19	61
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	3	▲ 14	2
Lead	ppm	ASTM D5185m		0	<1	0
Copper	ppm	ASTM D5185m	>8	0	▲ 88	<1
Tin	ppm	ASTM D5185m		<1	<1	0
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	38	9
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	1	3
Manganese	ppm	ASTM D5185m		1	3	1
Magnesium	ppm	ASTM D5185m		26	24	27
Calcium	ppm	ASTM D5185m		2991	4314	2954
Phosphorus	ppm	ASTM D5185m		1058	1507	999
Zinc	ppm	ASTM D5185m		1247	1734	1220
Sulfur	ppm	ASTM D5185m		10905	7333	11069

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	18	11	8
Sodium	ppm	ASTM D5185m		5	8	3
Potassium	ppm	ASTM D5185m	>20	<1	2	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT



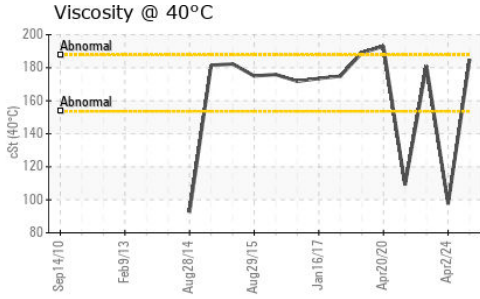


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	185	97.5	181

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

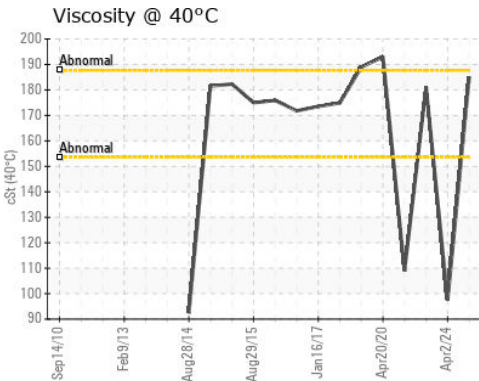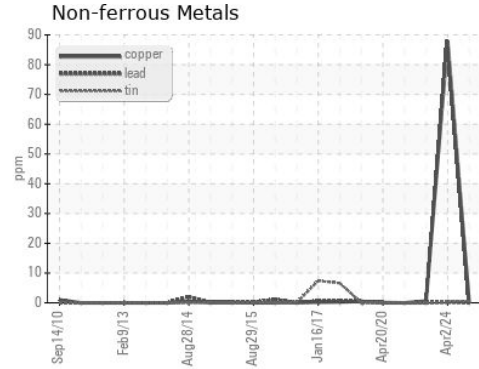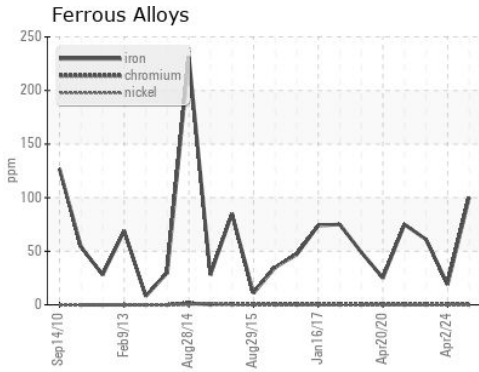

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0908850
Lab Number : 06156327
Unique Number : 10991750
Test Package : CONST

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)