



Area [185857-N2STV4W] **CHEVRON ATF - TAP**

New (Unused) Oil Fluid {not provided} (--- GAL)

Particle Filter (Magn: 200 x)

Parker

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info	in the babb	PH06156513		
Sample Date		Client Info		19 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	0		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>5	0		
Lead	ppm	ASTM D5185m	>5	0		
Copper	ppm	ASTM D5185m	>5	<1		
Tin	ppm	ASTM D5185m	>5	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		49		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		23		
Phosphorus	ppm	ASTM D5185m		147		
Zinc	ppm	ASTM D5185m		22		
Sulfur	ppm	ASTM D5185m		563		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304		0.032		
ppm Water	ppm	ASTM D6304		329		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1067		
Particles >6µm		ASTM D7647	>1300	288		
Particles >14µm		ASTM D7647	>160	22		
Particles >21µm		ASTM D7647		6		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D8045		0.69		

Acid Number (AN) mg KOH/g ASTM D8045 0.69






Report Id: HYSBER [WUSCAR] 06156513 (Generated: 04/24/2024 18:30:04) Rev: 1




OIL ANALYSIS REPORT

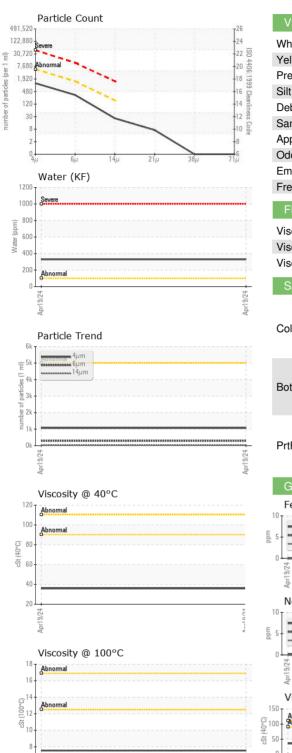

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual		NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		35.91		
Visc @ 100°C	cSt	ASTM D445		7.54		
Viscosity Index (VI)	Scale	ASTM D2270		184		
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color				ATF 724	no image	no image
Bottom					no image	no image
PrtFilter					no image	no image
GRAPHS						
Ferrous Alloys			Part 9/24	urticle Filter (M	04	100 200 ³⁰⁰ 10[11111111]

Non-ferrous Metals



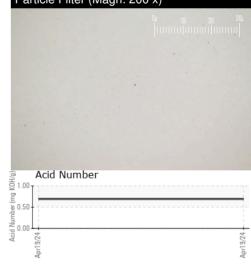



Apr19/24 -Apr19/24. Apr19/24 Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **HYSTER-YALE GROUP** : PH06156513 Received Sample No. : 22 Apr 2024 2200 MENELAUS PIKE Lab Number : 06156513 Tested : 24 Apr 2024 BEREA, KY : 24 Apr 2024 - Jonathan Hester Unique Number : 10991936 Diagnosed US 40403 Test Package : PLANT (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtFilter, VI) Contact: WARREN WILLIAMS Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. warren.williams@hyster-yale.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (859)228-1524 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Report Id: HYSBER [WUSCAR] 06156513 (Generated: 04/24/2024 18:30:04) Rev: 1

Contact/Location: WARREN WILLIAMS - HYSBER