




OIL ANALYSIS REPORT



Area
KANSAS/44/EG - DOZER
 Machine Id
39.62 [KANSAS^44^EG - DOZER]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

Sample Rating Trend

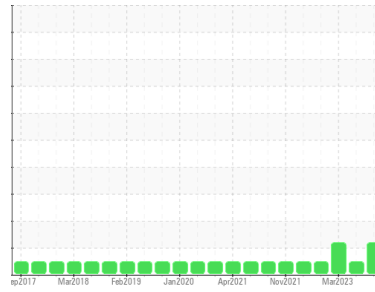

GLYCOL



DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0886987	WC0781257	WC0779826
Sample Date	Client Info		10 Apr 2024	13 Jun 2023	02 Mar 2023
Machine Age	hrs	Client Info	9895	8798	8579
Oil Age	hrs	Client Info	0	8347	99
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			ABNORMAL	NORMAL	MARGINAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	69	28	38
Chromium	ppm	ASTM D5185m >20	2	<1	<1
Nickel	ppm	ASTM D5185m >2	<1	0	0
Titanium	ppm	ASTM D5185m >2	1	0	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >25	13	7	9
Lead	ppm	ASTM D5185m >40	17	0	<1
Copper	ppm	ASTM D5185m >330	31	2	5
Tin	ppm	ASTM D5185m >15	1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	17	33	29
Barium	ppm	ASTM D5185m 0	<1	0	0
Molybdenum	ppm	ASTM D5185m 0	97	42	37
Manganese	ppm	ASTM D5185m	2	<1	1
Magnesium	ppm	ASTM D5185m 0	452	548	477
Calcium	ppm	ASTM D5185m	1471	1830	1646
Phosphorus	ppm	ASTM D5185m	752	975	735
Zinc	ppm	ASTM D5185m	878	1183	857
Sulfur	ppm	ASTM D5185m	2629	3665	2591

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	18	8	11
Sodium	ppm	ASTM D5185m	288	6	9
Potassium	ppm	ASTM D5185m >20	4	0	0
Fuel	%	ASTM D3524 >5	<1.0	<1.0	2.8
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.6	0.7
Nitration	Abs/cm	*ASTM D7624 >20	11.9	9.6	11.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.9	23.1	22.2


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.0	21.9	20.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	10.1	9.8	10.3




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

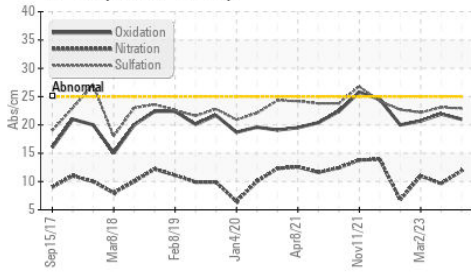


Fuel Dilution

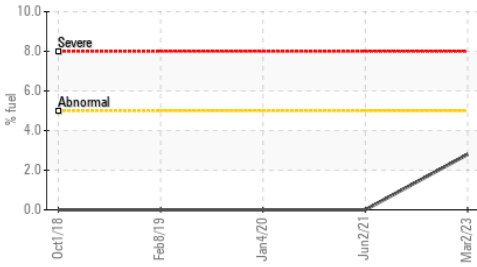


Glycol Contamination

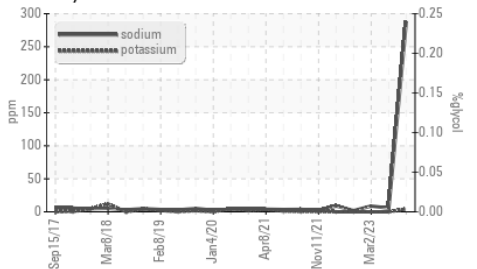

Fuel Dilution

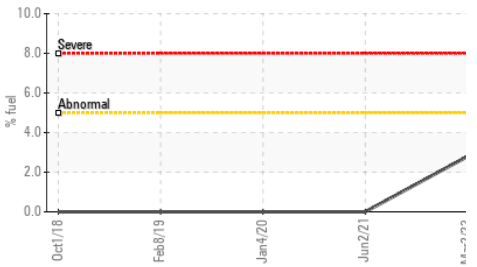

Glycol Contamination

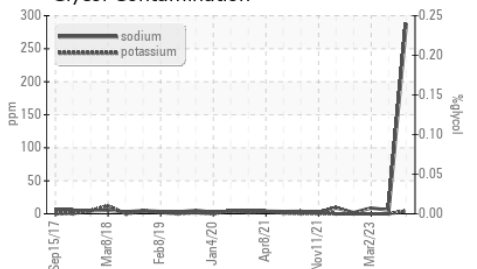


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	12.6	12.8 ▲ 12.4

GRAPHS


Ferrous Alloys

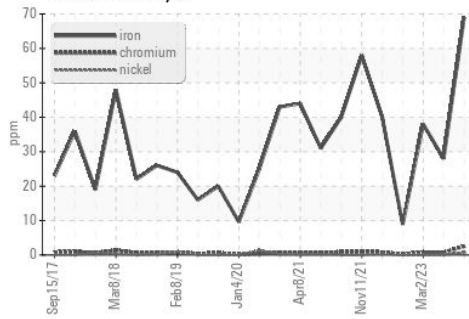


Non-ferrous Metals

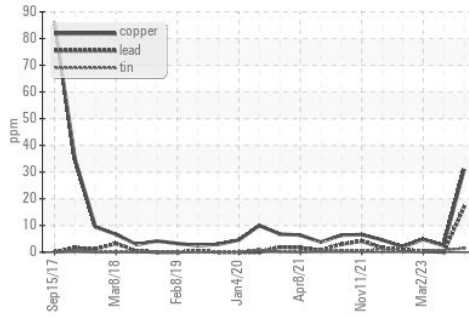

Viscosity @ 100°C

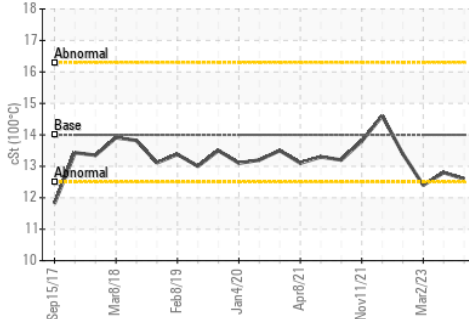

Base Number

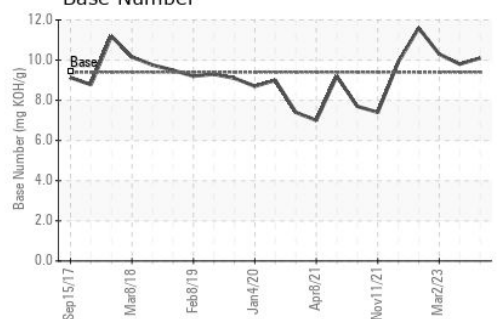

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0886987 **Received** : 22 Apr 2024
Lab Number : 06156659 **Tested** : 24 Apr 2024
Unique Number : 10992082 **Diagnosed** : 24 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)