




OIL ANALYSIS REPORT

Sample Rating Trend

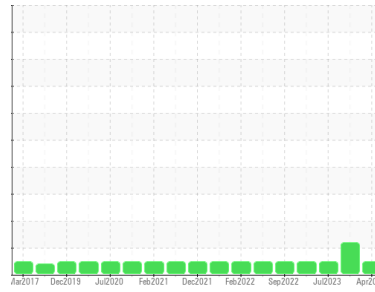

NORMAL



Area

OKLAHOMA/102/EG - TRUCK-ON-HWY-HEAVY DUTY

Machine Id

05.52 [OKLAHOMA^102^EG - TRUCK-ON-HWY-HEAVY DUTY]

Component

Diesel Engine

Fluid

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0864389	WC0864271	WC0819939
Sample Date	Client Info		10 Apr 2024	06 Dec 2023	29 Jul 2023
Machine Age	hrs	Client Info	12456	11925	11250
Oil Age	hrs	Client Info	250	0	0
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	10	12	19
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >2	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >20	3	3	8
Lead	ppm	ASTM D5185m >40	<1	0	0
Copper	ppm	ASTM D5185m >330	1	<1	0
Tin	ppm	ASTM D5185m >15	<1	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	50	47	33
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	39	36	39
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	475	487	534
Calcium	ppm	ASTM D5185m	1617	1501	1669
Phosphorus	ppm	ASTM D5185m	777	683	754
Zinc	ppm	ASTM D5185m	901	866	934
Sulfur	ppm	ASTM D5185m	2833	2241	2969

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	5	6
Sodium	ppm	ASTM D5185m	<1	1	2
Potassium	ppm	ASTM D5185m >20	3	3	14
Fuel	%	ASTM D3524 >3.0	0.7	▲ 4.2	<1.0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.3	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	7.3	8.4	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.3	22.7	22.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.5	21.3	20.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	9.7	9.5	9.3







OIL ANALYSIS REPORT

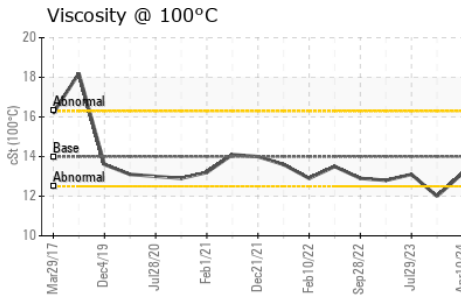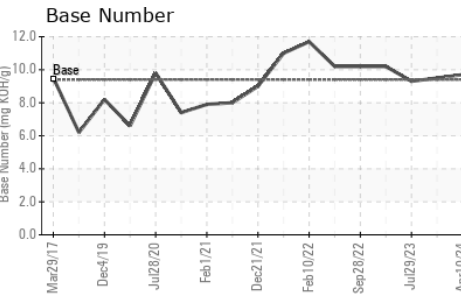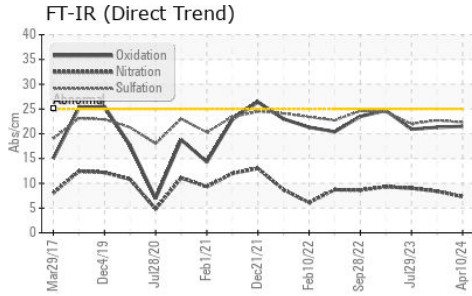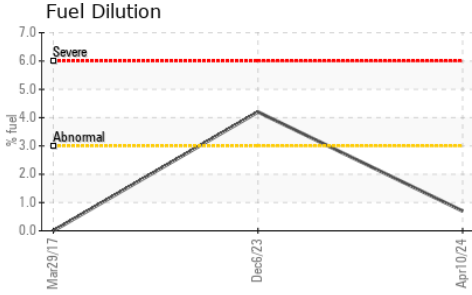

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.16	▲ 12.0	13.1

GRAPHS

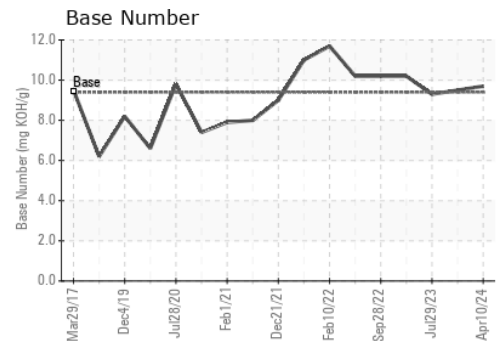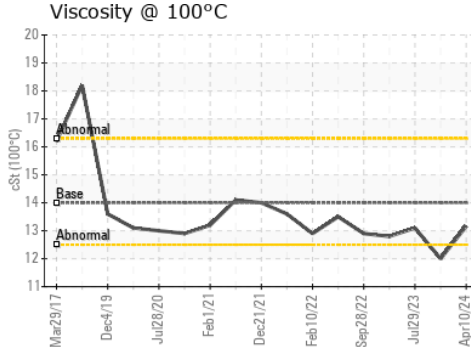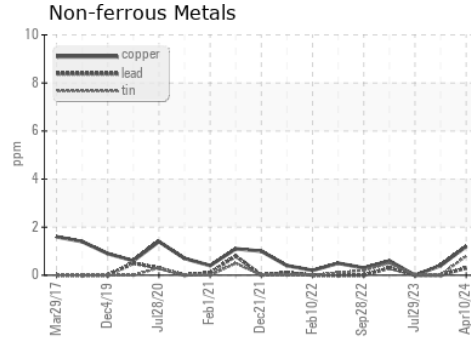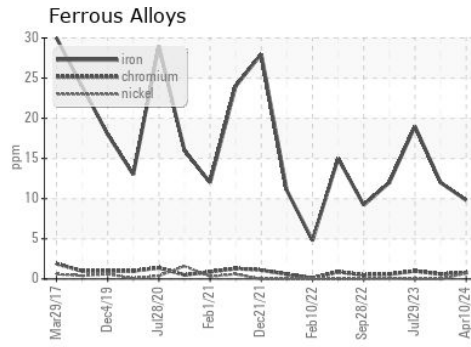

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864389 **Received** : 22 Apr 2024
Lab Number : 06156667 **Tested** : 26 Apr 2024
Unique Number : 10992090 **Diagnosed** : 26 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)