



PROBLEM SUMMARY



Area
MINING
 Machine Id
ME-6 CATERPILLAR 257D ME-6 CATERPILLAR 257D SKIDSTEE
 Component
Diesel Engine
 Fluid
SHELL RIMULA SUPER SAE 15W40 (--- GAL)



Sample Rating Trend



FUEL



COMPONENT CONDITION SUMMARY

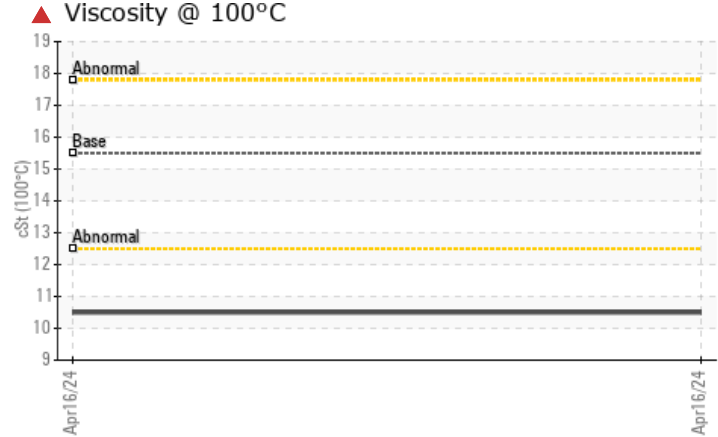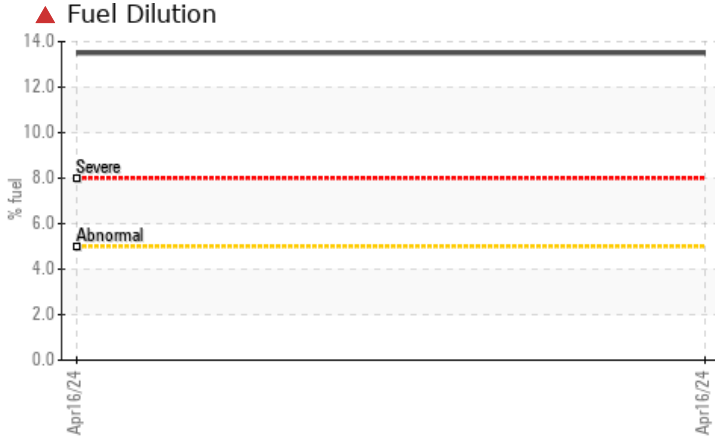

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | --- | --- |
|---------------|-----|------------|------|--------|-----|-----|
| Fuel | % | ASTM D3524 | >5 | ▲ 13.5 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 15.5 | ▲ 10.5 | --- | --- |

Customer Id: COVMEN
 Sample No.: WC0919970
 Lab Number: 06156677
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|----------------------------|--------|------|---------|---|
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Check Fuel/injector System | --- | --- | ? | We advise that you check the fuel injection system. |

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Area
MINING
Machine Id
ME-6 CATERPILLAR 257D ME-6 CATERPILLAR 257D SKIDSTEE
Component
Diesel Engine
Fluid
SHELL RIMULA SUPER SAE 15W40 (--- GAL)

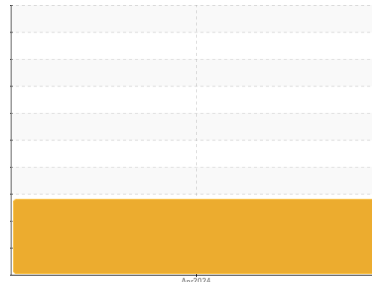

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0919970 | --- | --- |
| Sample Date | Client Info | | 16 Apr 2024 | --- | --- |
| Machine Age | hrs | Client Info | 2485 | --- | --- |
| Oil Age | hrs | Client Info | 270 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | SEVERE | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | --- | --- |
| Glycol | WC Method | | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 61 | --- | --- |
| Chromium | ppm | ASTM D5185m >20 | 4 | --- | --- |
| Nickel | ppm | ASTM D5185m >2 | 1 | --- | --- |
| Titanium | ppm | ASTM D5185m >2 | <1 | --- | --- |
| Silver | ppm | ASTM D5185m >2 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | 10 | --- | --- |
| Lead | ppm | ASTM D5185m >40 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m >330 | 9 | --- | --- |
| Tin | ppm | ASTM D5185m >15 | 1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | <1 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 102 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 71 | --- | --- |
| Manganese | ppm | ASTM D5185m | 1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 160 | --- | --- |
| Calcium | ppm | ASTM D5185m 2840 | 1689 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 1150 | 933 | --- | --- |
| Zinc | ppm | ASTM D5185m 1270 | 1078 | --- | --- |
| Sulfur | ppm | ASTM D5185m 2829 | 3439 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|---------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 19 | --- | --- |
| Sodium | ppm | ASTM D5185m | 3 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 6 | --- | --- |
| Fuel | % | ASTM D3524 >5 | ▲ 13.5 | --- | --- |

INFRA-RED





| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.3 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 11.8 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 23.3 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 20.0 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 10.6 | 6.1 | --- | --- |







OIL ANALYSIS REPORT

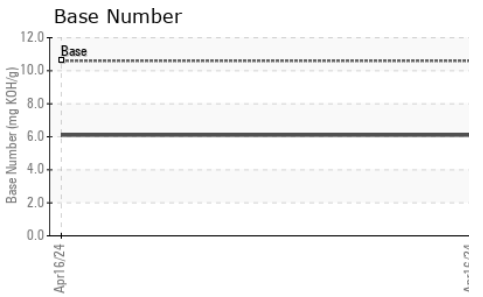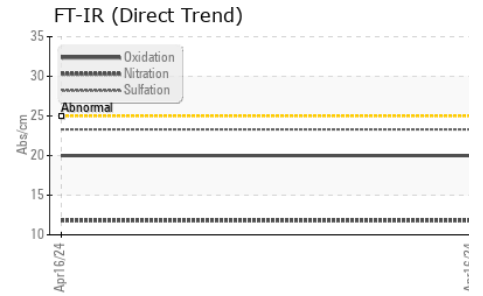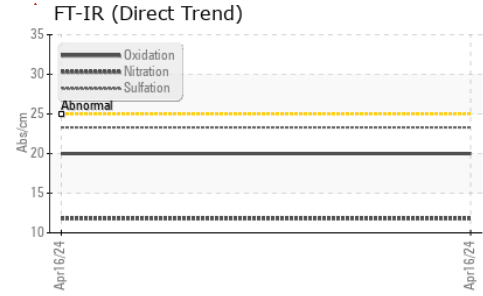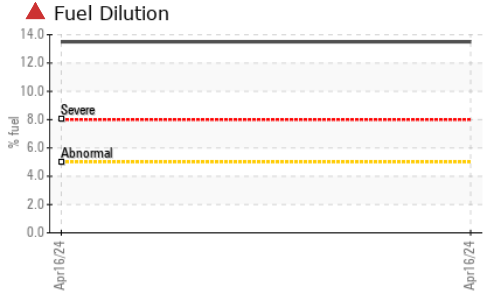

| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 15.5 | ▲ 10.5 | --- | --- |

GRAPHS

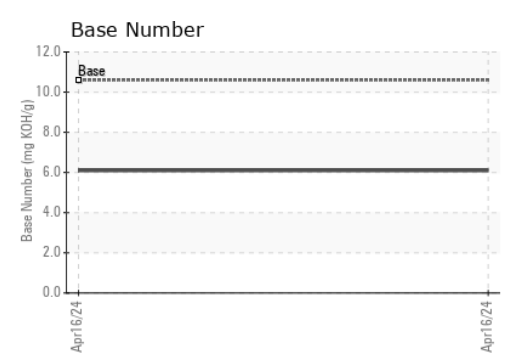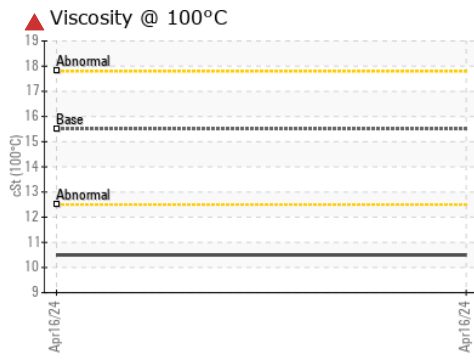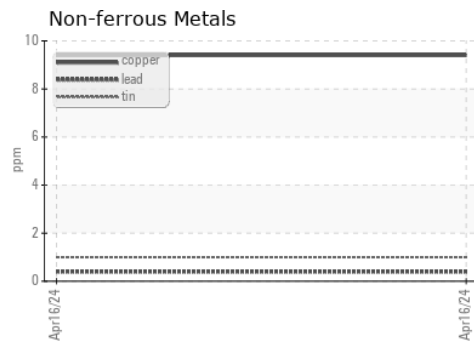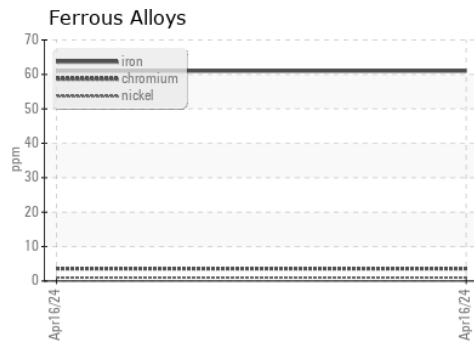

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0919970 **Received** : 22 Apr 2024
Lab Number : 06156677 **Tested** : 25 Apr 2024
Unique Number : 10992100 **Diagnosed** : 25 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

COVIA - MENOMONIE - 852
 N5628 580TH STREET
 MENOMONIE, WI
 US 54751
 Contact: Jeremy Wagner
 jeremy.wagner@coviacorp.com
 T: (715)235-0942
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)