

OIL ANALYSIS REPORT









KANSAS/44/EG - LOADER 46.107L [KANSAS^44^EG - LOADER]

Hydraulic System
Fluid
CAT HYDO (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0789829		
Sample Date		Client Info		16 Apr 2024		
Machine Age	hrs	Client Info		15		
Oil Age	hrs	Client Info		15		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>75	2		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1	history2
	ppm		limit/base			history2
Boron		ASTM D5185m	limit/base	0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	0 1		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 1 <1		
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 1 <1 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 1 <1 <1 3		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		0 1 <1 <1 3 179		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1100	0 1 <1 <1 3 179 702		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1100	0 1 <1 <1 3 179 702 876		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1100	0 1 <1 <1 3 179 702 876 1765		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1100 1210 limit/base	0 1 <1 <1 3 179 702 876 1765	 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1100 1210 limit/base >20	0 1 <1 <1 3 179 702 876 1765 current	 history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1100 1210 limit/base >20	0 1 <1 <1 3 179 702 876 1765 current 2	history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1100 1210 limit/base >20 >20	0 1 <1 <1 3 179 702 876 1765 current 2 0 3	history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1100 1210 limit/base >20 >20 limit/base	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1100 1210 limit/base >20 >20 limit/base	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current 4447	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	1100 1210 limit/base >20 >20 limit/base	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current 4447 328	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1100 1210 limit/base >20 >20 limit/base >2500 >640 >160 >40	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current 4447 328 13 3 0	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1100 1210 limit/base >20 >20 limit/base >2500 >640 >160 >40 >10	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current 4447 328 13 3 0 0	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	1100 1210 limit/base >20 >20 limit/base >2500 >640 >160 >40	0 1 <1 <1 <1 3 179 702 876 1765 current 2 0 3 current 4447 328 13 3 0	history1 history1	history2 history2

0.98



OIL ANALYSIS REPORT

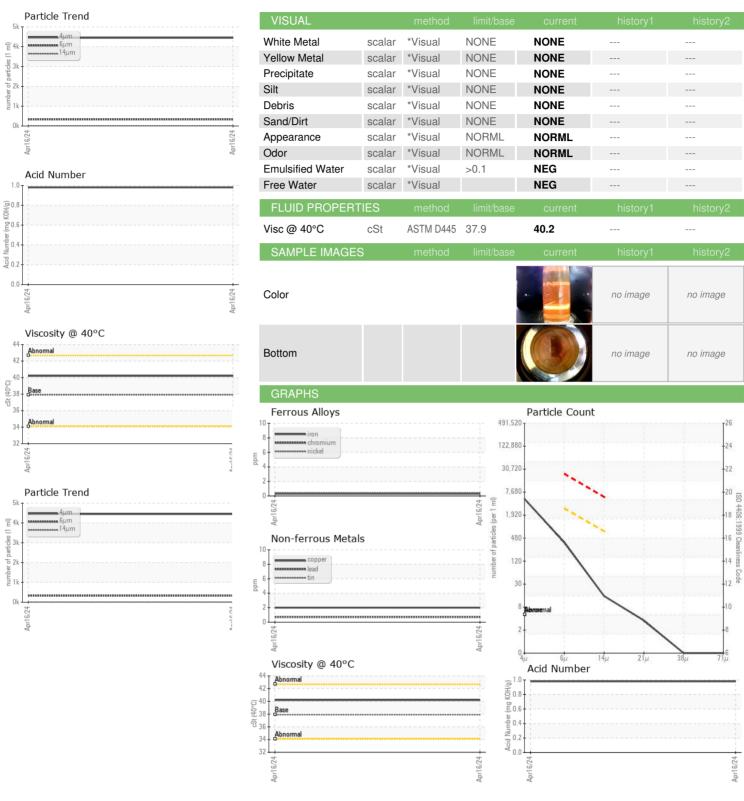





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0789829 Lab Number : 06156869 Unique Number : 10992292

Test Package : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received : 22 Apr 2024 **Tested**

: 23 Apr 2024 Diagnosed : 23 Apr 2024 - Wes Davis

3219 WEST MAY ST WICHITA, KS US 67213 Contact: RANDY ROBERTS randy.roberts@sherwood.net

SHERWOOD CONSTRUCTION CO INC

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SHEWIC [WUSCAR] 06156869 (Generated: 04/26/2024 12:49:50) Rev: 1

Submitted By: JASON GORGES

F: x:

T: (316)943-6491